


# OIL ANALYSIS REPORT

Sample Rating Trend



**NORMAL**

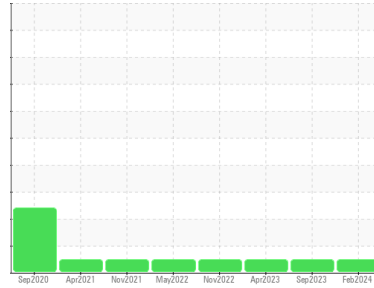

Machine Id  
**DT711**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 10W30 (--- QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PCA0111646</b>	PCA0101898	PCA0095212
Sample Date	Client Info			<b>09 Feb 2024</b>	28 Sep 2023	14 Apr 2023
Machine Age	mls	Client Info		<b>0</b>	0	0
Oil Age	mls	Client Info		<b>0</b>	0	0
Oil Changed	Client Info			<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2		<b>NEG</b>	NEG	NEG
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>110	<b>10</b>	13	15
Chromium	ppm	ASTM D5185m	>4	<b>&lt;1</b>	0	<1
Nickel	ppm	ASTM D5185m	>2	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185m		<b>0</b>	0	0
Silver	ppm	ASTM D5185m	>2	<b>&lt;1</b>	0	<1
Aluminum	ppm	ASTM D5185m	>25	<b>4</b>	3	5
Lead	ppm	ASTM D5185m	>45	<b>0</b>	0	0
Copper	ppm	ASTM D5185m	>85	<b>0</b>	<1	1
Tin	ppm	ASTM D5185m	>4	<b>&lt;1</b>	<1	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0



ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	<b>7</b>	3	14
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	50	<b>69</b>	66	68
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	0	<1
Magnesium	ppm	ASTM D5185m	950	<b>855</b>	920	983
Calcium	ppm	ASTM D5185m	1050	<b>1051</b>	1101	1156
Phosphorus	ppm	ASTM D5185m	995	<b>967</b>	982	1071
Zinc	ppm	ASTM D5185m	1180	<b>1185</b>	1209	1338
Sulfur	ppm	ASTM D5185m	2600	<b>2641</b>	2776	3524

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>30	<b>4</b>	4	4
Sodium	ppm	ASTM D5185m		<b>1</b>	4	1
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	6	4

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0.4</b>	0.4	0.4
Nitration	Abs/cm	*ASTM D7624	>20	<b>8.8</b>	8.9	8.9
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>19.7</b>	20.3	19.0

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>15.7</b>	16.1	16.1
Base Number (BN)	mg KOH/g	ASTM D2896		<b>7.1</b>	6.8	6.2





# OIL ANALYSIS REPORT

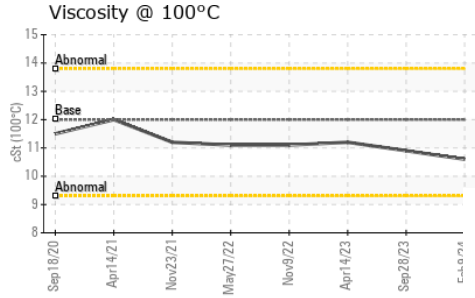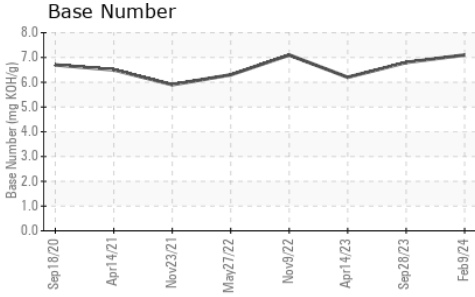

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	12.00	<b>10.6</b>	10.9	11.2

## GRAPHS

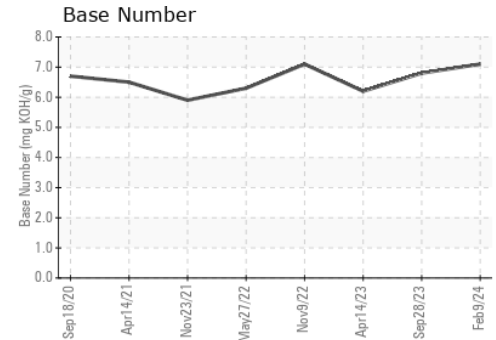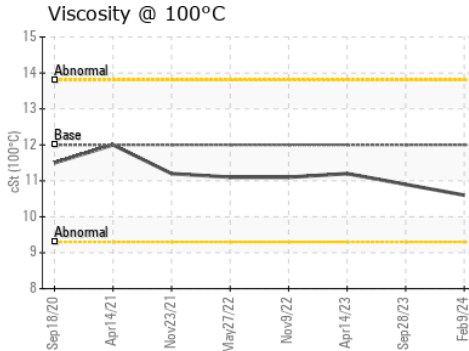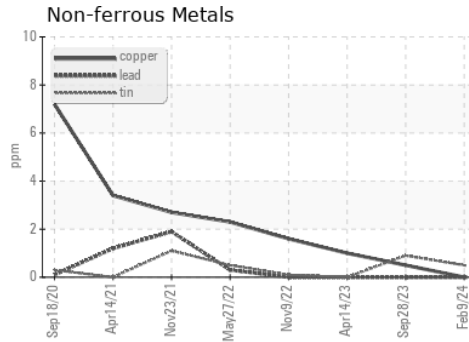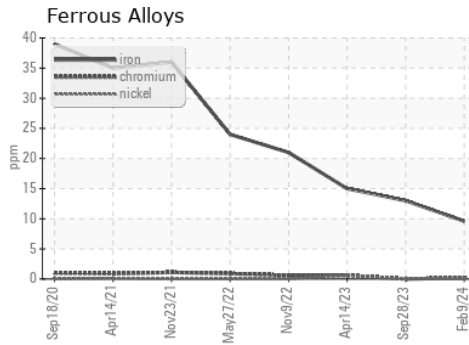

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0111646  
**Lab Number** : **06096041**  
**Unique Number** : 10888894  
**Test Package** : FLEET

**Received** : 21 Feb 2024  
**Tested** : 22 Feb 2024  
**Diagnosed** : 22 Feb 2024 - Wes Davis

**NW WHITE & CO - BEAUFORT DIVISION**  
 1491 YENMASSEE HIGHWAY  
 VARNVILLE, SC  
 US 29944  
 Contact: VINCENT BULLOCK  
 bullockvince514@gmail.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: