




OIL ANALYSIS REPORT

Sample Rating Trend

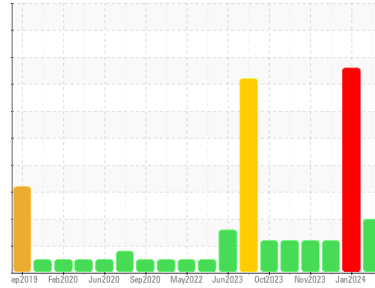

Area
(83J3TW)
Machine Id
229035-632119
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

- Recommendation**
No corrective action is recommended at this time. Resample at the next service interval to monitor.
- Wear**
All component wear rates are normal.
- Contamination**
Elemental level of silicon (Si) above normal indicating ingress of seal material.
- Fluid Condition**
The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0108026	GFL0108172	GFL0102434
Sample Date	Client Info	13 Feb 2024	08 Jan 2024	19 Dec 2023
Machine Age	hrs	10346	10216	10096
Oil Age	hrs	10216	0	0
Oil Changed	Client Info	Not Chngd	Changed	N/A
Sample Status		ABNORMAL	SEVERE	ABNORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<1.0	1.4	<1.0
Water	WC Method >0.2	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	14	16	15
Chromium	ppm ASTM D5185m >20	<1	<1	<1
Nickel	ppm ASTM D5185m >4	<1	0	0
Titanium	ppm ASTM D5185m	<1	0	0
Silver	ppm ASTM D5185m >3	0	0	0
Aluminum	ppm ASTM D5185m >20	3	2	1
Lead	ppm ASTM D5185m >40	0	<1	0
Copper	ppm ASTM D5185m >330	11	<1	<1
Tin	ppm ASTM D5185m >15	1	<1	<1
Vanadium	ppm ASTM D5185m	0	0	0
Cadmium	ppm ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	11	4	3
Barium	ppm ASTM D5185m 0	13	0	0
Molybdenum	ppm ASTM D5185m 60	48	76	76
Manganese	ppm ASTM D5185m 0	3	0	<1
Magnesium	ppm ASTM D5185m 1010	740	1016	1156
Calcium	ppm ASTM D5185m 1070	1212	1137	1264
Phosphorus	ppm ASTM D5185m 1150	939	1090	1201
Zinc	ppm ASTM D5185m 1270	1127	1299	1469
Sulfur	ppm ASTM D5185m 2060	2858	2834	3394

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	▲ 33	7	5
Sodium	ppm ASTM D5185m	2	▲ 381	▲ 218
Potassium	ppm ASTM D5185m >20	5	4	1
Glycol	% *ASTM D2982	0.0	◆ 0.10	NEG

INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	0.2	0.5	0.3
Nitration	Abs/cm *ASTM D7624 >20	6.1	11.9	9.7
Sulfation	Abs.1mm *ASTM D7415 >30	18.7	24.1	23.0


FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs.1mm *ASTM D7414 >25	14.2	22.1	19.6
Base Number (BN)	mg KOH/g ASTM D2896 9.8	9.0	8.2	8.8




OIL ANALYSIS REPORT


▲ Silicon (ppm)

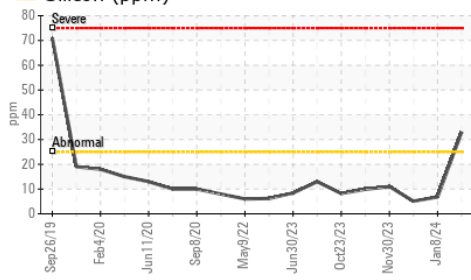


Glycol Contamination

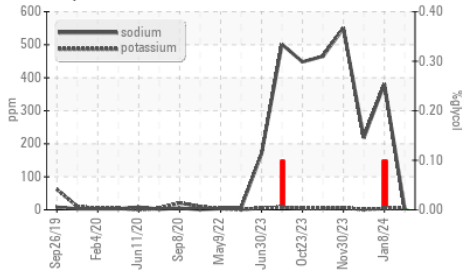

Glycol Contamination

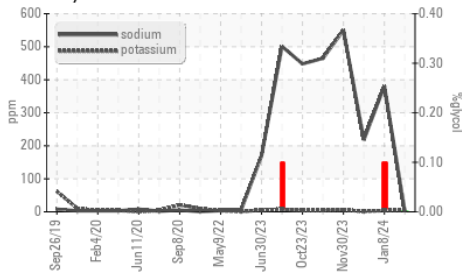

Base Number

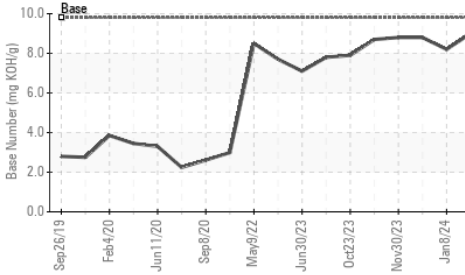


VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	LIGHT	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	▲ 11.6	▲ 11.6	13.9

GRAPHS


Ferrous Alloys

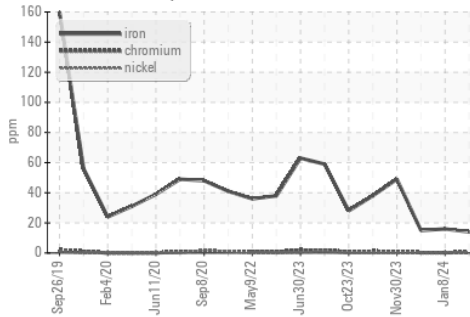


Non-ferrous Metals

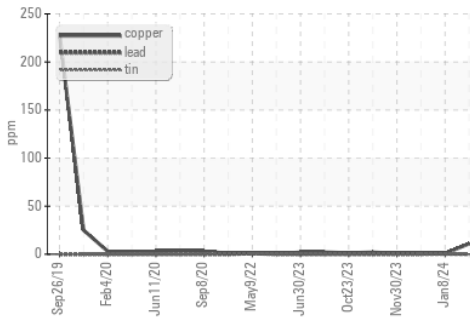

▲ Viscosity @ 100°C

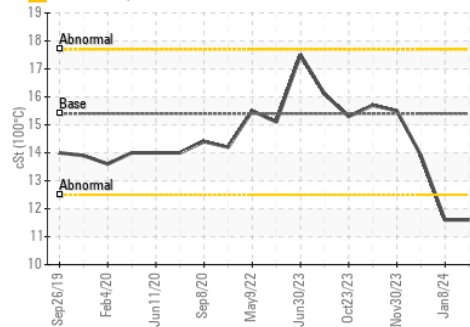

Base Number

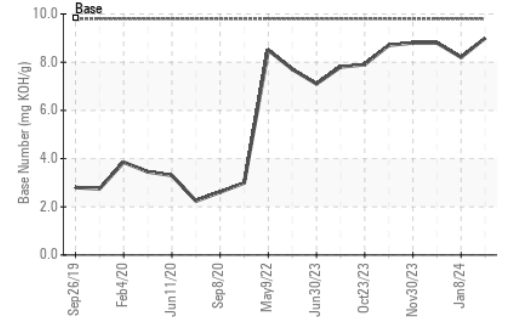

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0108026
Lab Number : 06096126
Unique Number : 10888979
Test Package : FLEET

Received : 21 Feb 2024
Tested : 23 Feb 2024
Diagnosed : 26 Feb 2024 - Jonathan Hester

GFL Environmental - 836 - Kansas City Hauling
 7801 East Truman Road
 Kansas City, MO
 US 64126
 Contact: Loyce Stewart
 loyce.stewart@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: