




# OIL ANALYSIS REPORT

Sample Rating Trend

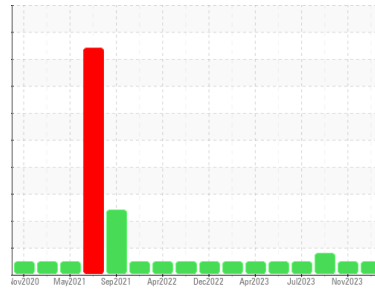

**NORMAL**



Area  
**(26812XA)**  
Machine Id  
**527018-7011**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (--- LTR)**



## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

Metal levels are typical for a new component breaking in.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2	
Sample Number	Client Info	<b>GFL0058113</b>	GFL0058096	GFL0058050	
Sample Date	Client Info	<b>20 Feb 2024</b>	13 Nov 2023	10 Aug 2023	
Machine Age	mls	Client Info	<b>18178</b>	17526	382161
Oil Age	mls	Client Info	<b>409</b>	576	733
Oil Changed	Client Info	<b>N/A</b>	N/A	Changed	
Sample Status		<b>NORMAL</b>	NORMAL	ABNORMAL	

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >120	<b>31</b>	21	30
Chromium	ppm ASTM D5185m >20	<b>&lt;1</b>	<1	1
Nickel	ppm ASTM D5185m >5	<b>4</b>	4	▲ 16
Titanium	ppm ASTM D5185m >2	<b>0</b>	0	<1
Silver	ppm ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm ASTM D5185m >20	<b>26</b>	14	10
Lead	ppm ASTM D5185m >40	<b>0</b>	0	2
Copper	ppm ASTM D5185m >330	<b>3</b>	<1	2
Tin	ppm ASTM D5185m >15	<b>0</b>	<1	<1
Vanadium	ppm ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>&lt;1</b>	3	<1
Barium	ppm ASTM D5185m 0	<b>&lt;1</b>	0	0
Molybdenum	ppm ASTM D5185m 60	<b>69</b>	59	67
Manganese	ppm ASTM D5185m 0	<b>0</b>	<1	1
Magnesium	ppm ASTM D5185m 1010	<b>1041</b>	994	1043
Calcium	ppm ASTM D5185m 1070	<b>1054</b>	1057	1305
Phosphorus	ppm ASTM D5185m 1150	<b>933</b>	1075	1098
Zinc	ppm ASTM D5185m 1270	<b>1338</b>	1350	1457
Sulfur	ppm ASTM D5185m 2060	<b>2920</b>	3055	3613

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>10</b>	10	12
Sodium	ppm ASTM D5185m	<b>2</b>	7	12
Potassium	ppm ASTM D5185m >20	<b>6</b>	7	8

## INFRA-RED



method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >4	<b>1</b>	1.1	1.1
Nitration	Abs/cm *ASTM D7624 >20	<b>9.5</b>	8.7	9.8
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>20.8</b>	20.6	22.7

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>16.2</b>	15.5	17.5
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>7.3</b>	7.2	5.8







# OIL ANALYSIS REPORT

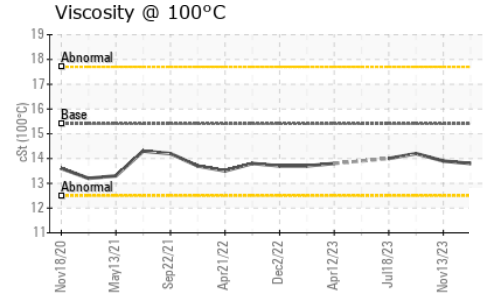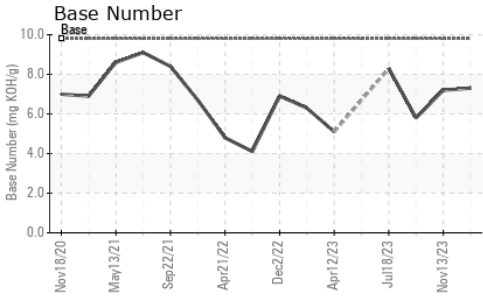

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.8</b>	13.9	14.2

## GRAPHS

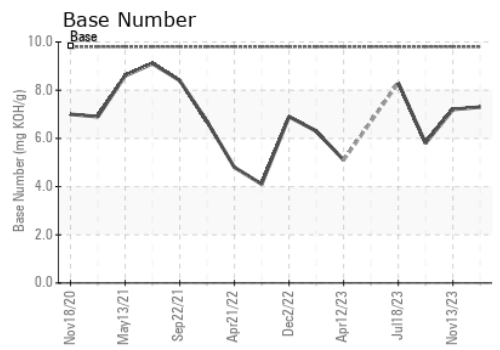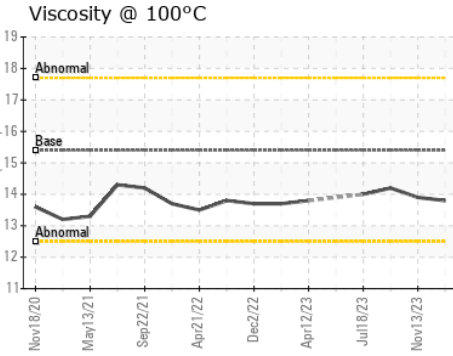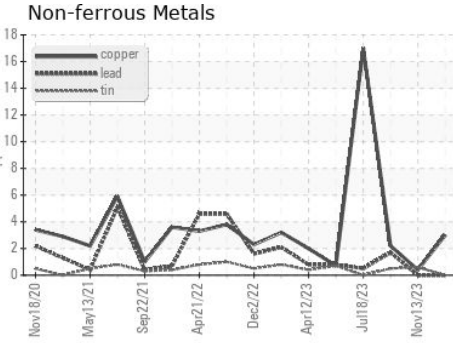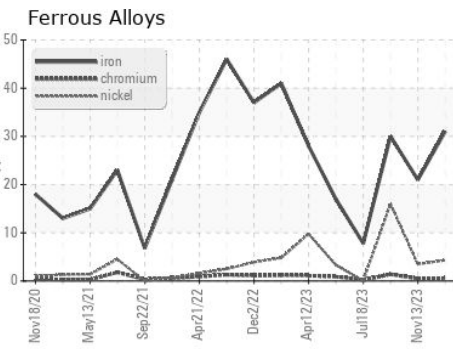

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0058113 **Received** : 21 Feb 2024  
**Lab Number** : 06096196 **Tested** : 22 Feb 2024  
**Unique Number** : 10889049 **Diagnosed** : 22 Feb 2024 - Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 657 - Charlottesville Hauling**  
 5498 Richmond Road  
 Troy, VA  
 US 22974  
 Contact: Brian Ulickas  
 bulickas@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)