


OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

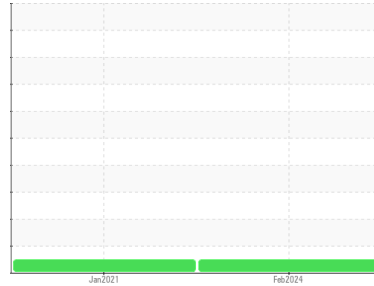

Machine Id
RM 1 DIST (S/N 10003293)

Component
Gearbox

Fluid
PETRO CANADA ENDURATEX SYNTHETIC EP 460 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PCA0110409	PCA05166986	---
Sample Date	Client Info		15 Feb 2024	25 Jan 2021	---
Machine Age	mths	Client Info	9	0	---
Oil Age	mths	Client Info	9	0	---
Oil Changed	Client Info		N/A	N/A	---
Sample Status			NORMAL	NORMAL	---

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	NEG	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >200	51	29	---
Chromium	ppm	ASTM D5185m >15	<1	<1	---
Nickel	ppm	ASTM D5185m >15	0	0	---
Titanium	ppm	ASTM D5185m	0	0	---
Silver	ppm	ASTM D5185m	0	0	---
Aluminum	ppm	ASTM D5185m >25	2	0	---
Lead	ppm	ASTM D5185m >100	0	0	---
Copper	ppm	ASTM D5185m >200	<1	<1	---
Tin	ppm	ASTM D5185m >25	0	<1	---
Antimony	ppm	ASTM D5185m >5	---	0	---
Vanadium	ppm	ASTM D5185m	0	0	---
Cadmium	ppm	ASTM D5185m	0	0	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 330	29	31	---
Barium	ppm	ASTM D5185m 5	<1	0	---
Molybdenum	ppm	ASTM D5185m	0	<1	---
Manganese	ppm	ASTM D5185m	0	<1	---
Magnesium	ppm	ASTM D5185m 5	<1	<1	---
Calcium	ppm	ASTM D5185m 5	4	23	---
Phosphorus	ppm	ASTM D5185m 437	387	423	---
Zinc	ppm	ASTM D5185m 5	2	0	---
Sulfur	ppm	ASTM D5185m 5000	6169	5618	---


CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >50	<1	1	---
Sodium	ppm	ASTM D5185m	0	<1	---
Potassium	ppm	ASTM D5185m >20	2	1	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045 0.7	1.59	---	---


OIL ANALYSIS REPORT

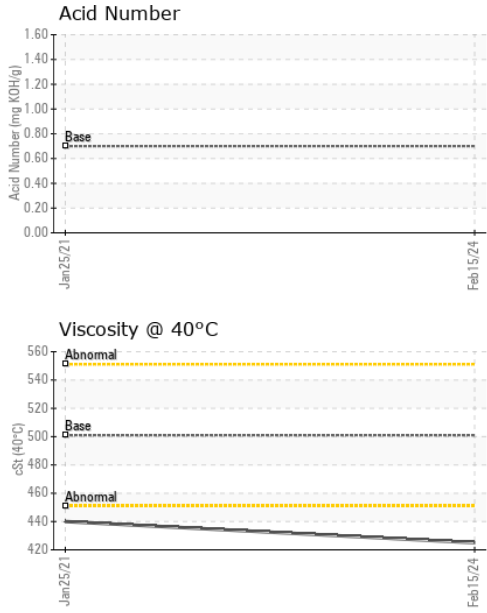





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 501	425	440	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

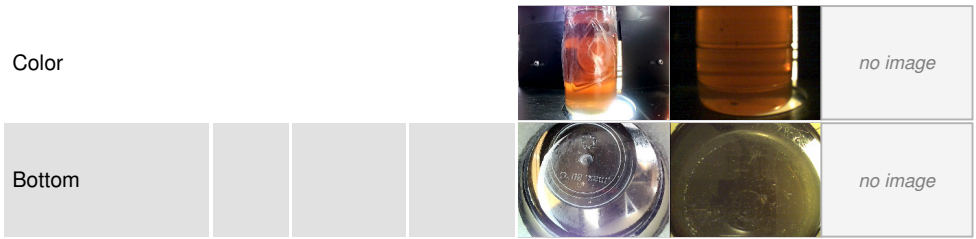

GRAPHS

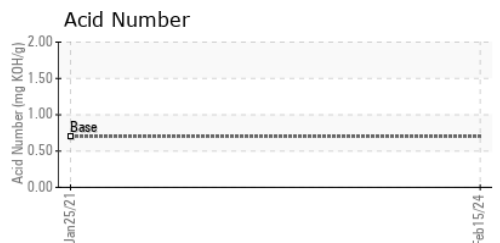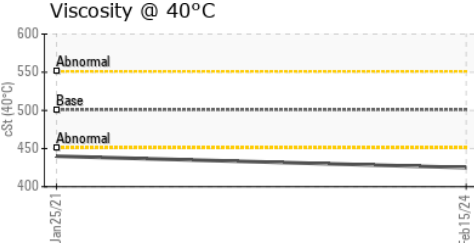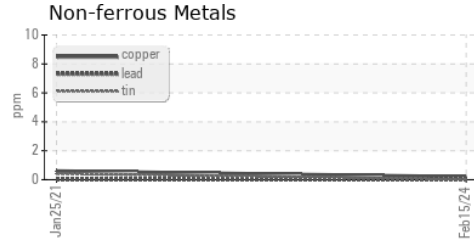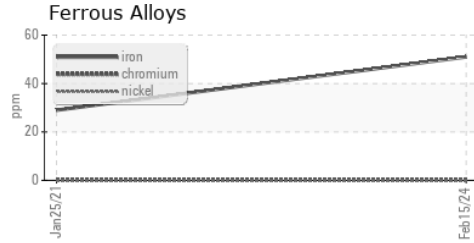

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0110409 **Received** : 21 Feb 2024
Lab Number : 06096346 **Tested** : 22 Feb 2024
Unique Number : 10889199 **Diagnosed** : 23 Feb 2024 - Don Baldrige
Test Package : IND 2

CERTAINTED CORP
 200 RONTHOR DR
 SOCIAL CIRCLE, GA
 US 30025
 Contact: Dennis Shields
 Dennis.R.Shields@saint-gobain.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) F: (770)464-0878