


# OIL ANALYSIS REPORT

Sample Rating Trend



**NORMAL**

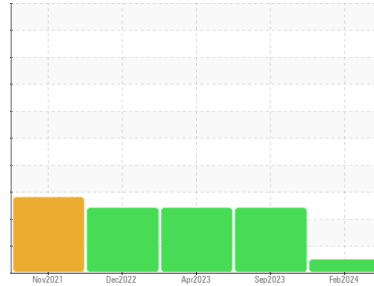

Machine Id  
**DT679**  
 Component  
**Front Differential**  
 Fluid  
**GEAR OIL SAE 75W90 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PCA0111597</b>	PCA0101902	PCA0095287
Sample Date	Client Info			<b>13 Feb 2024</b>	29 Sep 2023	19 Apr 2023
Machine Age	hrs	Client Info		<b>0</b>	0	0
Oil Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed	Client Info			<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	ABNORMAL	ABNORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>.2	<b>NEG</b>	NEG	NEG


WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>500	<b>313</b>	360	266
Chromium	ppm	ASTM D5185m	>10	<b>2</b>	2	2
Nickel	ppm	ASTM D5185m	>10	<b>7</b>	14	11
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	<1
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>25	<b>4</b>	▲ 5	▲ 6
Lead	ppm	ASTM D5185m	>25	<b>0</b>	0	0
Copper	ppm	ASTM D5185m	>100	<b>&lt;1</b>	<1	0
Tin	ppm	ASTM D5185m	>10	<b>&lt;1</b>	0	0
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	400	<b>245</b>	226	234
Barium	ppm	ASTM D5185m	200	<b>2</b>	0	0
Molybdenum	ppm	ASTM D5185m	12	<b>10</b>	0	<1
Manganese	ppm	ASTM D5185m		<b>3</b>	4	4
Magnesium	ppm	ASTM D5185m	12	<b>47</b>	1	<1
Calcium	ppm	ASTM D5185m	150	<b>43</b>	13	10
Phosphorus	ppm	ASTM D5185m	1650	<b>1319</b>	1389	1397
Zinc	ppm	ASTM D5185m	125	<b>61</b>	0	5
Sulfur	ppm	ASTM D5185m	22500	<b>21708</b>	24693	28863

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>75	<b>66</b>	▲ 134	▲ 100
Sodium	ppm	ASTM D5185m		<b>3</b>	3	3
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	0	<1

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>.2	<b>NEG</b>	NEG	NEG
Free Water	scalar	*Visual		<b>NEG</b>	NEG	NEG

# OIL ANALYSIS REPORT



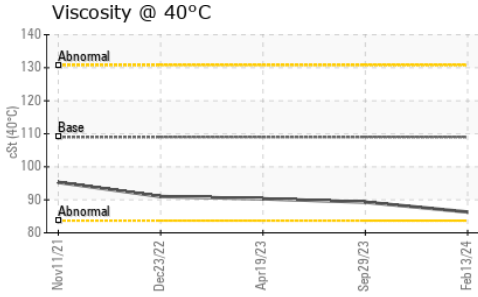


FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D445	109	<b>86.3</b>	89.3	90.3

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color	no image	no image	no image
Bottom	no image	no image	no image

## GRAPHS

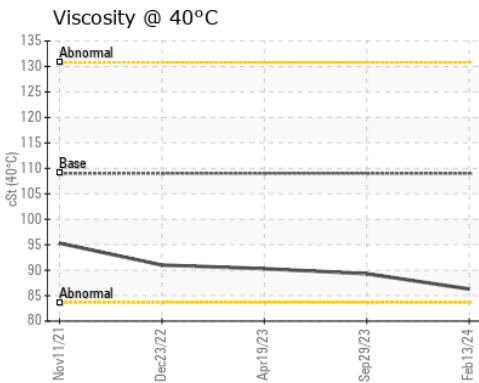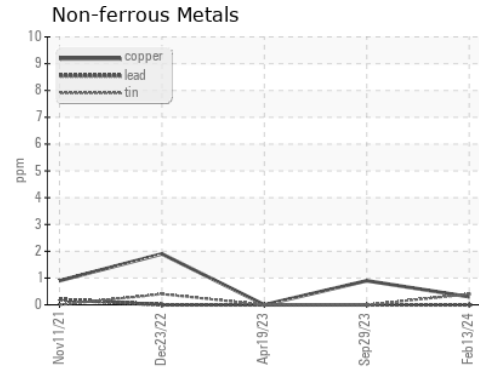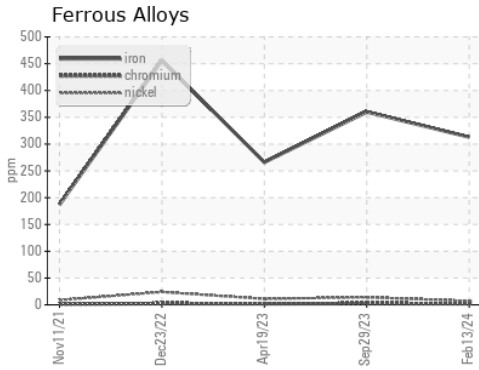

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0111597  
**Lab Number** : **06096498**  
**Unique Number** : 10889351  
**Test Package** : FLEET

**Received** : 21 Feb 2024  
**Tested** : 22 Feb 2024  
**Diagnosed** : 22 Feb 2024 - Wes Davis

**NW WHITE & CO - BEAUFORT DIVISION**  
 1491 YENMASSEE HIGHWAY  
 VARNVILLE, SC  
 US 29944  
 Contact: VINCENT BULLOCK  
 bullockvince514@gmail.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: