


OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

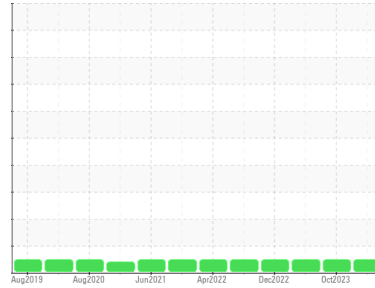

Machine Id
DT660
 Component
Front Differential
 Fluid
CHEVRON RPM SYNTHETIC GEAR 75W90 (4 mls)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

| SAMPLE INFORMATION | | method | limit/base | current | history1 | history2 |
|--------------------|-------------|-------------|------------|--------------------|-------------|-------------|
| Sample Number | Client Info | | | PCA0111613 | PCA0101841 | PCA0095236 |
| Sample Date | Client Info | | | 13 Feb 2024 | 02 Oct 2023 | 16 May 2023 |
| Machine Age | mls | Client Info | | 47809 | 47809 | 47809 |
| Oil Age | mls | Client Info | | 47809 | 47809 | 47809 |
| Oil Changed | Client Info | | | N/A | N/A | N/A |
| Sample Status | | | | NORMAL | NORMAL | NORMAL |

| CONTAMINATION | | method | limit/base | current | history1 | history2 |
|---------------|-----------|--------|------------|------------|----------|----------|
| Water | WC Method | | >.2 | NEG | NEG | NEG |

| WEAR METALS | | method | limit/base | current | history1 | history2 |
|-------------|-----|-------------|------------|--------------|----------|----------|
| Iron | ppm | ASTM D5185m | >500 | 105 | 99 | 75 |
| Chromium | ppm | ASTM D5185m | >10 | <1 | <1 | <1 |
| Nickel | ppm | ASTM D5185m | >10 | 0 | 0 | 0 |
| Titanium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Silver | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Aluminum | ppm | ASTM D5185m | >25 | 2 | 2 | <1 |
| Lead | ppm | ASTM D5185m | >25 | 0 | 0 | 0 |
| Copper | ppm | ASTM D5185m | >100 | 0 | <1 | <1 |
| Tin | ppm | ASTM D5185m | >10 | <1 | 0 | 0 |
| Vanadium | ppm | ASTM D5185m | | <1 | 0 | 0 |
| Cadmium | ppm | ASTM D5185m | | <1 | 0 | 0 |


| ADDITIVES | | method | limit/base | current | history1 | history2 |
|------------|-----|-------------|------------|--------------|----------|----------|
| Boron | ppm | ASTM D5185m | | 208 | 242 | 225 |
| Barium | ppm | ASTM D5185m | | 2 | <1 | 0 |
| Molybdenum | ppm | ASTM D5185m | | 17 | 18 | 18 |
| Manganese | ppm | ASTM D5185m | | 2 | 2 | 1 |
| Magnesium | ppm | ASTM D5185m | | 85 | 91 | 92 |
| Calcium | ppm | ASTM D5185m | | 114 | 194 | 205 |
| Phosphorus | ppm | ASTM D5185m | | 1211 | 1244 | 1249 |
| Zinc | ppm | ASTM D5185m | | 132 | 162 | 160 |
| Sulfur | ppm | ASTM D5185m | | 19353 | 20676 | 21838 |

| CONTAMINANTS | | method | limit/base | current | history1 | history2 |
|--------------|-----|-------------|------------|----------|----------|----------|
| Silicon | ppm | ASTM D5185m | >75 | 9 | 10 | 9 |
| Sodium | ppm | ASTM D5185m | | 2 | 1 | <1 |
| Potassium | ppm | ASTM D5185m | >20 | 2 | 2 | <1 |

| VISUAL | | method | limit/base | current | history1 | history2 |
|------------------|--------|---------|------------|--------------|----------|----------|
| White Metal | scalar | *Visual | NONE | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE | NONE |
| Precipitate | scalar | *Visual | NONE | NONE | NONE | NONE |
| Silt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >.2 | NEG | NEG | NEG |
| Free Water | scalar | *Visual | | NEG | NEG | NEG |



OIL ANALYSIS REPORT

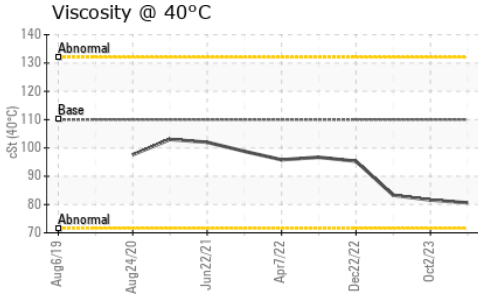




FLUID PROPERTIES

| method | limit/base | current | history1 | history2 |
|-------------|-------------------|-------------|----------|----------|
| Visc @ 40°C | cSt ASTM D445 110 | 80.6 | 81.6 | 83.3 |

SAMPLE IMAGES

| method | limit/base | current | history1 | history2 |
|--------|------------|----------|----------|----------|
| Color | | no image | no image | no image |
| Bottom | | no image | no image | no image |

GRAPHS

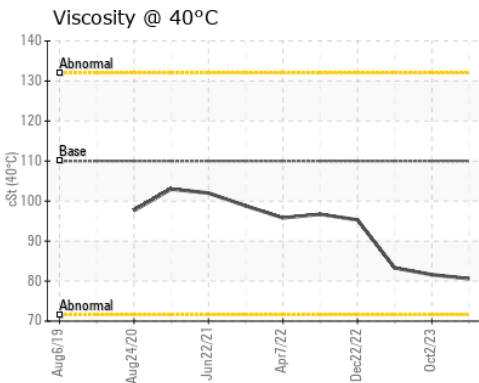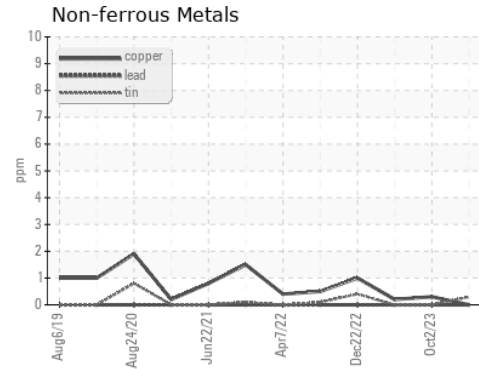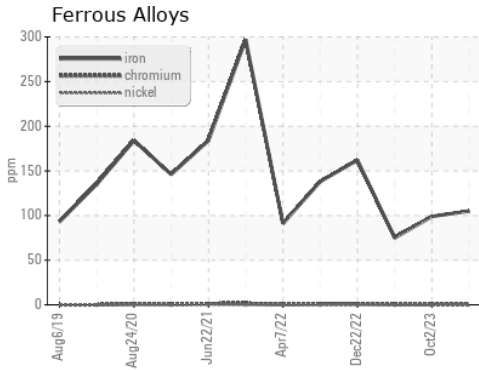

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0111613
Lab Number : **06096502**
Unique Number : 10889355
Test Package : FLEET

Received : 21 Feb 2024
Tested : 22 Feb 2024
Diagnosed : 22 Feb 2024 - Wes Davis

NW WHITE & CO - BEAUFORT DIVISION
 1491 YENMASSEE HIGHWAY
 VARNVILLE, SC
 US 29944
 Contact: VINCENT BULLOCK
 bullockvince514@gmail.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: