




# OIL ANALYSIS REPORT

Sample Rating Trend

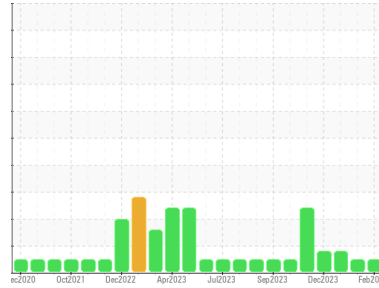

**NORMAL**



Machine Id  
**728006**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (18 QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0112311</b>	GFL0109922	GFL0107227
Sample Date	Client Info	<b>21 Feb 2024</b>	29 Jan 2024	12 Jan 2024
Machine Age	hrs	<b>2400</b>	2242	2106
Oil Age	hrs	<b>158</b>	563	427
Oil Changed	Client Info	<b>Not Changed</b>	Changed	Not Changed
Sample Status		<b>NORMAL</b>	NORMAL	MARGINAL

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	<1.0	▲ 4.3
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	<b>13</b>	37	30
Chromium	ppm ASTM D5185m >20	<b>&lt;1</b>	1	<1
Nickel	ppm ASTM D5185m >4	<b>0</b>	0	0
Titanium	ppm ASTM D5185m	<b>&lt;1</b>	0	0
Silver	ppm ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm ASTM D5185m >20	<b>2</b>	4	2
Lead	ppm ASTM D5185m >40	<b>0</b>	3	1
Copper	ppm ASTM D5185m >330	<b>&lt;1</b>	1	1
Tin	ppm ASTM D5185m >15	<b>&lt;1</b>	<1	0
Vanadium	ppm ASTM D5185m	<b>&lt;1</b>	0	0
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>14</b>	4	6
Barium	ppm ASTM D5185m 0	<b>0</b>	0	3
Molybdenum	ppm ASTM D5185m 60	<b>57</b>	56	59
Manganese	ppm ASTM D5185m 0	<b>&lt;1</b>	<1	0
Magnesium	ppm ASTM D5185m 1010	<b>831</b>	802	873
Calcium	ppm ASTM D5185m 1070	<b>981</b>	946	1016
Phosphorus	ppm ASTM D5185m 1150	<b>919</b>	907	923
Zinc	ppm ASTM D5185m 1270	<b>1090</b>	1100	1147
Sulfur	ppm ASTM D5185m 2060	<b>2644</b>	2425	2938

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>0</b>	7	6
Sodium	ppm ASTM D5185m	<b>3</b>	4	<1
Potassium	ppm ASTM D5185m >20	<b>0</b>	2	2

## INFRA-RED



method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>0.3</b>	1	0.7
Nitration	Abs/cm *ASTM D7624 >20	<b>6.0</b>	12.0	10.7
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>15.2</b>	24.1	21.9

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>11.0</b>	23.7	20.4
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>6.1</b>	4.9	5.9







# OIL ANALYSIS REPORT

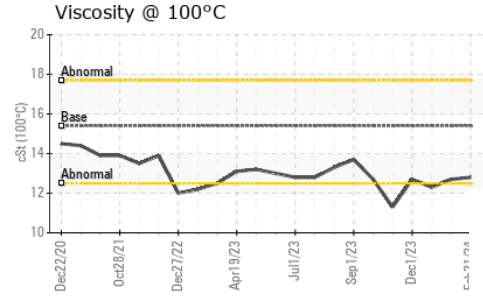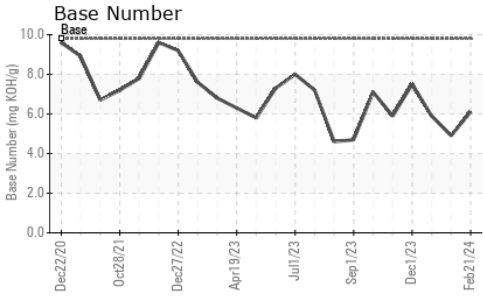

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>12.8</b>	12.7	12.3

## GRAPHS

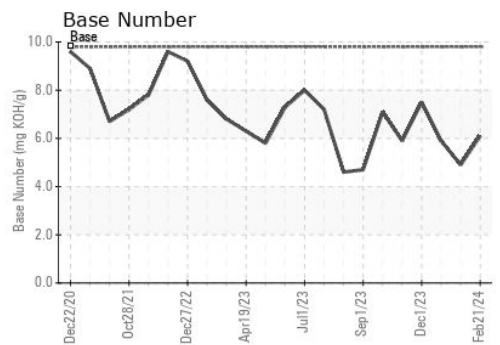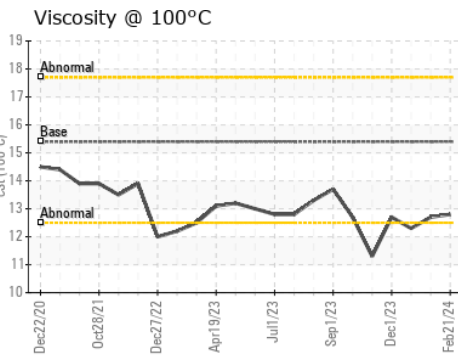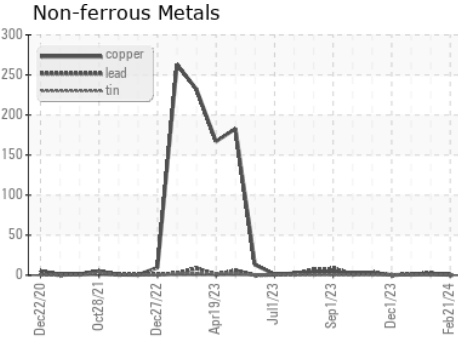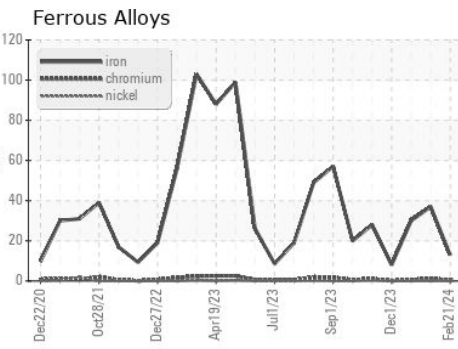

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0112311      **Received** : 22 Feb 2024  
**Lab Number** : 06096720      **Tested** : 23 Feb 2024  
**Unique Number** : 10889573      **Diagnosed** : 23 Feb 2024 - Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 010 - Stockbridge**  
 1280 Rum Creek Parkway  
 Stockbridge, GA  
 US 30281  
 Contact: JOSHUA TINKER  
 joshuatinker@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)