


OIL ANALYSIS REPORT

NDT



NORMAL



Machine Id **642709**

Component **Diesel Engine**

PETRO CANADA DURON SHP 10W30 (--- QTS)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

Metal levels are typical for a new component breaking in.

Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.


Fluid Condition


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

						•
OTS)			: Feb 2024			
SAMPLE INFOR	RMATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PCA0118845		
Sample Date		Client Info		09 Feb 2024		
Machine Age	mls	Client Info		11431		
Dil Age	mls	Client Info		0		
Dil Changed		Client Info		N/A		
Sample Status				NORMAL		
CONTAMINA	TION	method	limit/base	current	history1	history2
uel		WC Method	>5	<1.0		
Vater		WC Method	>0.2	NEG		
Slycol		WC Method	7 0.2	NEG		
•			11 12 12			
WEAR META	LS	method	limit/base	current	history1	history2
on	ppm	ASTM D5185m	>100	27		
Chromium	ppm	ASTM D5185m	>20	1		
lickel	ppm	ASTM D5185m	>4	<1		
itanium	ppm	ASTM D5185m		<1		
Silver	ppm	ASTM D5185m	>3	<1		
luminum	ppm	ASTM D5185m	>20	15		
ead	ppm	ASTM D5185m	>40	0		
Copper	ppm	ASTM D5185m	>330	82		
ïn	ppm	ASTM D5185m	>15	6		
/anadium	ppm	ASTM D5185m		<1		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	43		
Barium	ppm	ASTM D5185m	0	0		
Nolybdenum	ppm	ASTM D5185m	50	49		
Manganese	ppm	ASTM D5185m	0	3		
/lagnesium	ppm	ASTM D5185m	950	546		
Calcium	ppm	ASTM D5185m	1050	1610		
hosphorus	ppm	ASTM D5185m	995	727		
inc	ppm	ASTM D5185m	1180	869		
ulfur	ppm	ASTM D5185m	2600	2425		
CONTAMINA	NTS _	method	limit/base	current	history1	history2
ilicon	ppm	ASTM D5185m	>25	1		
Sodium	ppm	ASTM D5185m		4		
otassium	ppm	ASTM D5185m	>20	46		
INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.4		
litration	Abs/cm	*ASTM D7624	>20	7.0		
Sulfation	Abs/.1mm	*ASTM D7415	>30	22.2		
FLUID DEGRA	DATION	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	18.8		
Base Number (BN)		ASTM D2896		8.9		
acc ranibol (DIA)	ilig NOII/g	AOTHI DE000		0.0		



OIL ANALYSIS REPORT

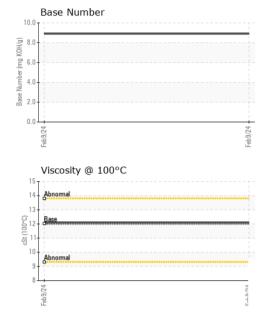

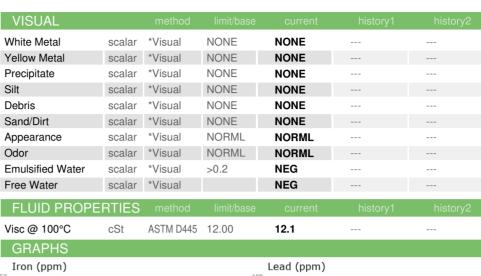

GRAPHS	
Iron (ppm)	Lead (ppm)
200 Severe	80 Severe
E 150 Abnormal	60 Abnormal
100 - Abnormal	40 - Abnormal
0	
Feb 9/24	Feb 9/24 Feb 9/24 Feb 9/24 Feb 9/24
Aluminum (ppm)	Chromium (ppm)
50 T Severe	50 - Severe
B 30 Abnormal	E 30 + Abnormal
20 - Abnormal	20- Abnormal
0	0
Feb 9/24	Feb 9/24 Feb
Copper (ppm)	Silicon (ppm)
Severe Patromate 300	Severe
<u>E</u> 200 +	E 40 -
100	Abnormal
0	0
Feb 9/24	Feb 9/24 Feb 9/24 4
Viscosity @ 100°C	Base Number
14 Abnormal	O.8.0
(2,00) 12 - Base	E 6.0
ੱਤ 10 Abnormal	8.0
8	
Feb 9/24	Feb 9/24





Certificate L2367

Laboratory Sample No.

Lab Number : 06096765

Unique Number : 10889618

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : PCA0118845

Tested

Diagnosed : 23 Feb 2024 - Sean Felton Test Package : MOB 1 (Additional Tests: TBN)

To discuss this sample report, contact Customer Service at 1-800-237-1369. * - Denotes test methods that are outside of the ISO 17025 scope of accreditation. **MILLER TRUCK LEASING #119**

39 INDUSTRIAL AVE HASBROUCK HEIGHTS, NJ US 07604

Contact: MIKE LONGETTE mlongette@millertransgroup.com

T:

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Received

: 22 Feb 2024

: 23 Feb 2024

Report Id: MILRUT [WUSCAR] 06096765 (Generated: 02/23/2024 15:58:43) Rev: 1

Contact/Location: MIKE LONGETTE - MILRUT

F: (201)528-7053