




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

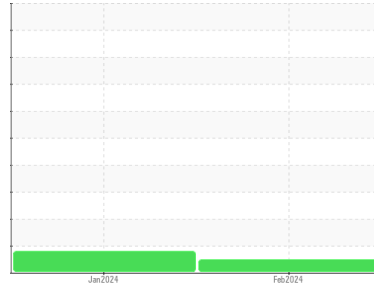

Area  
**(TJX4156)**  
 Machine Id  
**934056**  
 Component  
**1 Natural Gas Engine**  
 Fluid  
**PETRO CANADA DURON GEO LD 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. (Customer Sample Comment: Engine oil sample )

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0103944</b>	GFL0103958	---
Sample Date	Client Info		<b>14 Feb 2024</b>	09 Jan 2024	---
Machine Age	hrs	Client Info	<b>1407</b>	1174	---
Oil Age	hrs	Client Info	<b>1407</b>	1174	---
Oil Changed	Client Info		<b>N/A</b>	Changed	---
Sample Status			<b>NORMAL</b>	ABNORMAL	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	<b>NEG</b>	NEG	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >50	<b>11</b>	▲ 64	---
Chromium	ppm	ASTM D5185m >4	<b>1</b>	3	---
Nickel	ppm	ASTM D5185m >2	<b>&lt;1</b>	<1	---
Titanium	ppm	ASTM D5185m	<b>0</b>	0	---
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m >9	<b>8</b>	4	---
Lead	ppm	ASTM D5185m >30	<b>&lt;1</b>	12	---
Copper	ppm	ASTM D5185m >35	<b>2</b>	2	---
Tin	ppm	ASTM D5185m >4	<b>1</b>	2	---
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 50	<b>15</b>	10	---
Barium	ppm	ASTM D5185m 5	<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m 50	<b>49</b>	68	---
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	---
Magnesium	ppm	ASTM D5185m 560	<b>552</b>	996	---
Calcium	ppm	ASTM D5185m 1510	<b>1536</b>	1278	---
Phosphorus	ppm	ASTM D5185m 780	<b>730</b>	1148	---
Zinc	ppm	ASTM D5185m 870	<b>918</b>	1385	---
Sulfur	ppm	ASTM D5185m 2040	<b>2306</b>	2936	---

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >+100	<b>7</b>	7	---
Sodium	ppm	ASTM D5185m	<b>5</b>	13	---
Potassium	ppm	ASTM D5185m >20	<b>27</b>	2	---

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	<b>0.3</b>	2.3	---
Nitration	Abs/cm	*ASTM D7624 >20	<b>7.0</b>	13.1	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>17.7</b>	27.0	---

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>14.0</b>	23.3	---
Base Number (BN)	mg KOH/g	ASTM D2896 10.2	<b>5.8</b>	7.9	---







# OIL ANALYSIS REPORT

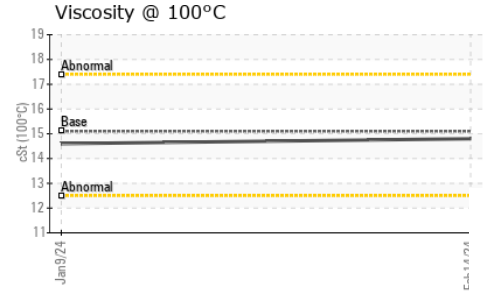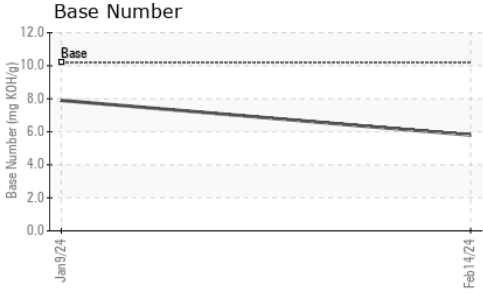

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.1	14.8	14.6

## GRAPHS

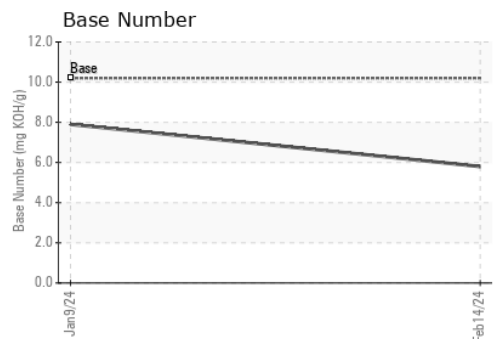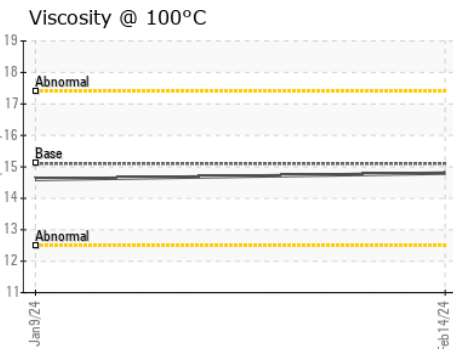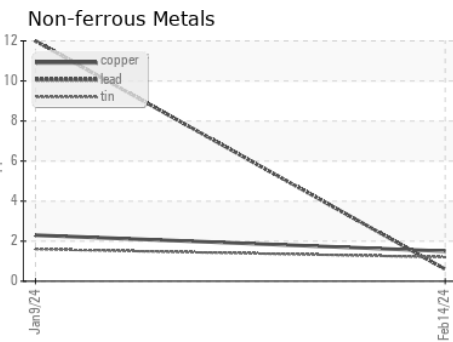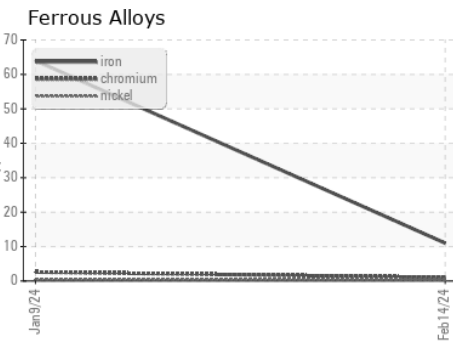

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0103944      **Received** : 22 Feb 2024  
**Lab Number** : 06097509      **Tested** : 23 Feb 2024  
**Unique Number** : 10890362      **Diagnosed** : 24 Feb 2024 - Don Baldrige  
**Test Package** : FLEET

**GFL Environmental - 865 - East Mount Hauling**  
 7213 East Mount Houston Road  
 Houston, TX  
 US 77050  
 Contact: TECHNICIAN ACCOUNT  
 wcgfldemo@gmail.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: