




# OIL ANALYSIS REPORT

Sample Rating Trend

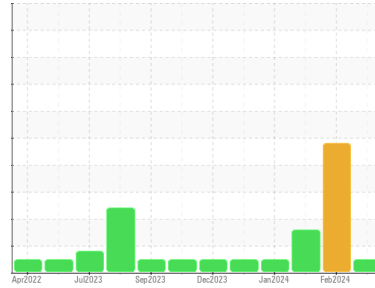

**NORMAL**



Machine Id  
**1103M**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (36 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0110146</b>	GFL0110038	GFL0110021
Sample Date	Client Info	<b>15 Feb 2024</b>	06 Feb 2024	30 Jan 2024
Machine Age	hrs	<b>16132</b>	16050	15989
Oil Age	hrs	<b>600</b>	600	600
Oil Changed	Client Info	<b>Changed</b>	Changed	Changed
Sample Status		<b>NORMAL</b>	ABNORMAL	ABNORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >65	<b>8</b>	35	10
Chromium	ppm ASTM D5185m >5	<b>&lt;1</b>	<1	<1
Nickel	ppm ASTM D5185m >3	<b>0</b>	<1	0
Titanium	ppm ASTM D5185m >5	<b>&lt;1</b>	<1	<1
Silver	ppm ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm ASTM D5185m >35	<b>2</b>	▲ 7	7
Lead	ppm ASTM D5185m >10	<b>&lt;1</b>	<1	1
Copper	ppm ASTM D5185m >180	<b>10</b>	1	13
Tin	ppm ASTM D5185m >8	<b>&lt;1</b>	<1	1
Vanadium	ppm ASTM D5185m	<b>&lt;1</b>	0	<1
Cadmium	ppm ASTM D5185m	<b>0</b>	<1	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>1</b>	18	<1
Barium	ppm ASTM D5185m 0	<b>0</b>	<1	0
Molybdenum	ppm ASTM D5185m 60	<b>56</b>	103	49
Manganese	ppm ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm ASTM D5185m 1010	<b>904</b>	863	858
Calcium	ppm ASTM D5185m 1070	<b>982</b>	994	919
Phosphorus	ppm ASTM D5185m 1150	<b>934</b>	873	934
Zinc	ppm ASTM D5185m 1270	<b>1161</b>	1144	1132
Sulfur	ppm ASTM D5185m 2060	<b>2813</b>	3052	2584

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >15	<b>6</b>	▲ 25	▲ 19
Sodium	ppm ASTM D5185m	<b>4</b>	▲ 1299	5
Potassium	ppm ASTM D5185m >20	<b>0</b>	▲ 32	2

## INFRA-RED



method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>0.2</b>	0.7	0.2
Nitration	Abs/cm *ASTM D7624 >20	<b>5.7</b>	12.8	5.2
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>18.4</b>	21.7	18.1

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>13.8</b>	18.1	13.4
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>8.7</b>	9.2	9.0







# OIL ANALYSIS REPORT

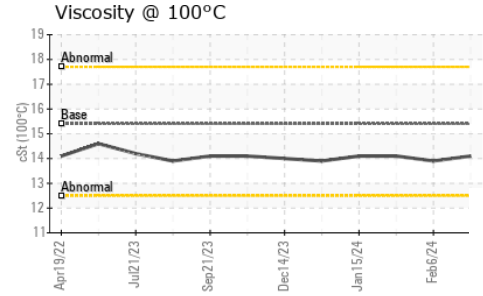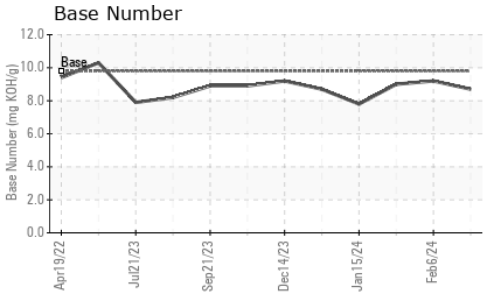

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>14.1</b>	13.9	14.1

## GRAPHS

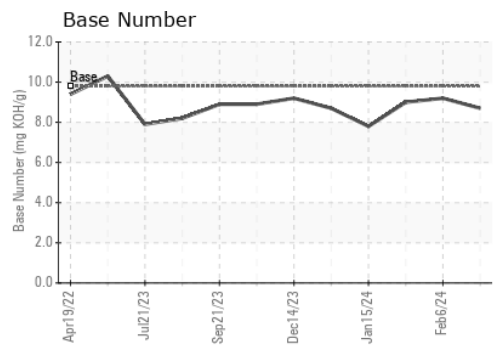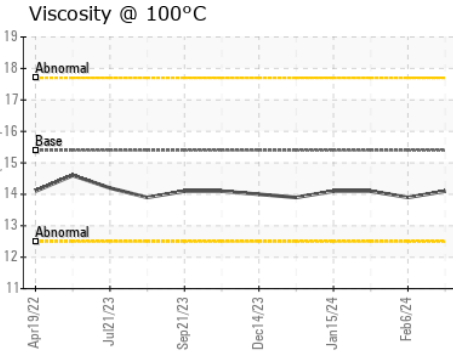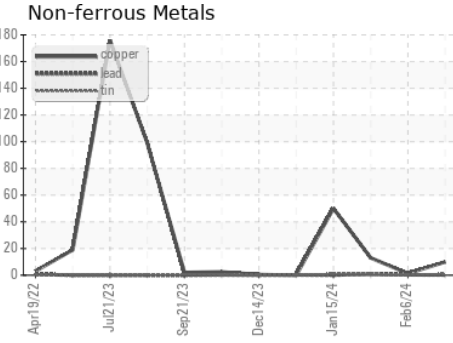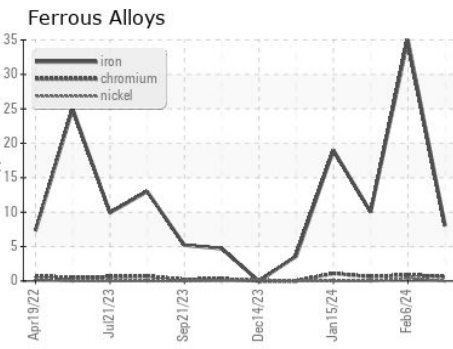

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0110146 **Received** : 22 Feb 2024  
**Lab Number** : **06097516** **Tested** : 23 Feb 2024  
**Unique Number** : 10890369 **Diagnosed** : 23 Feb 2024 - Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 410 - Michigan West**  
 39000 Van Born Rd  
 Wayne, MI  
 US 48184  
 Contact: Belal Dgheish  
 bdgheish@gflenv.com  
 T: (734)714-2340  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)