



# OIL ANALYSIS REPORT

Sample Rating Trend


GLYCOL



Machine Id  
**727091-310016**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

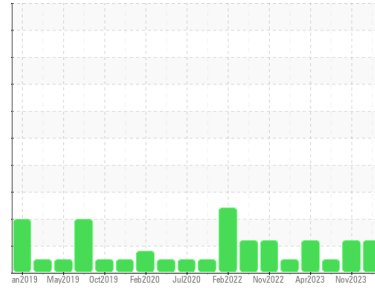

## DIAGNOSIS

### Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

Sodium and/or potassium levels remain high. Test for glycol is negative.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0103980</b>	GFL0100496	GFL0074225
Sample Date	Client Info	<b>08 Feb 2024</b>	13 Nov 2023	19 May 2023
Machine Age	hrs	<b>15963</b>	15374	14253
Oil Age	hrs	<b>15963</b>	15374	14253
Oil Changed	Client Info	<b>Changed</b>	Changed	Changed
Sample Status		<b>ABNORMAL</b>	ATTENTION	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	<b>12</b>	16	15
Chromium	ppm ASTM D5185m >20	<b>&lt;1</b>	1	<1
Nickel	ppm ASTM D5185m >4	<b>0</b>	0	<1
Titanium	ppm ASTM D5185m	<b>0</b>	<1	0
Silver	ppm ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm ASTM D5185m >20	<b>4</b>	4	2
Lead	ppm ASTM D5185m >40	<b>0</b>	0	1
Copper	ppm ASTM D5185m >330	<b>&lt;1</b>	3	0
Tin	ppm ASTM D5185m >15	<b>0</b>	<1	0
Vanadium	ppm ASTM D5185m	<b>0</b>	<1	<1
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>16</b>	8	11
Barium	ppm ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm ASTM D5185m 60	<b>60</b>	64	59
Manganese	ppm ASTM D5185m 0	<b>0</b>	<1	<1
Magnesium	ppm ASTM D5185m 1010	<b>849</b>	938	910
Calcium	ppm ASTM D5185m 1070	<b>1226</b>	1312	1201
Phosphorus	ppm ASTM D5185m 1150	<b>1022</b>	1061	994
Zinc	ppm ASTM D5185m 1270	<b>1192</b>	1271	1225
Sulfur	ppm ASTM D5185m 2060	<b>2927</b>	2993	3544

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>5</b>	8	5
Sodium	ppm ASTM D5185m	<b>▲ 119</b>	▲ 143	48
Potassium	ppm ASTM D5185m >20	<b>5</b>	5	4
Glycol	% *ASTM D2982	<b>NEG</b>	NEG	NEG

## INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>0.2</b>	0.5	0.5
Nitration	Abs/cm *ASTM D7624 >20	<b>7.7</b>	9.8	9.2
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>18.7</b>	21.5	20.9


## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>14.3</b>	17.9	17.2
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>8.3</b>	9.1	9.2




# OIL ANALYSIS REPORT


Glycol Contamination

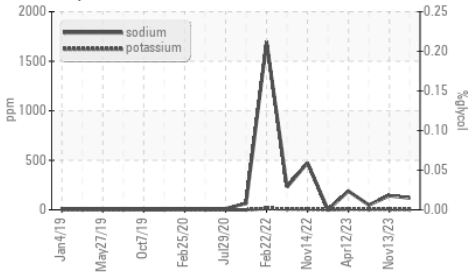

Viscosity @ 100°C

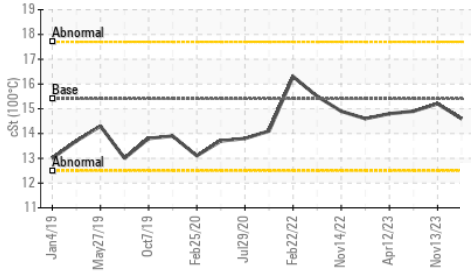

Glycol Contamination

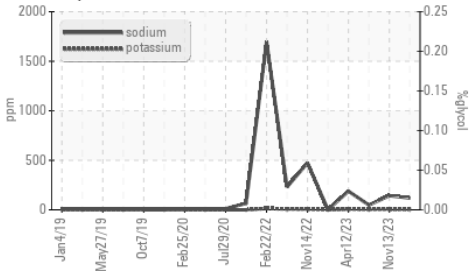


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>14.6</b>	15.2	14.9

## GRAPHS


Ferrous Alloys

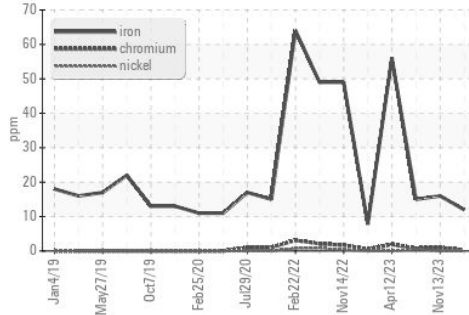


Non-ferrous Metals

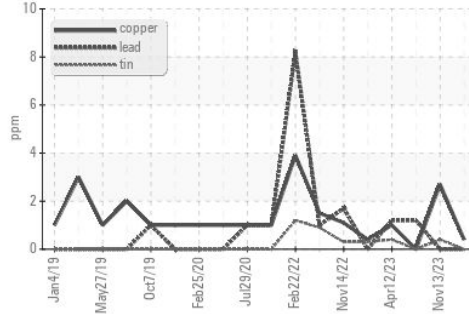

Viscosity @ 100°C

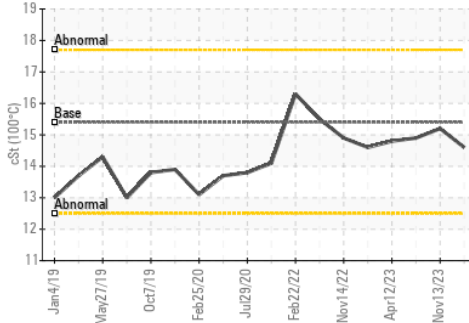

Base Number

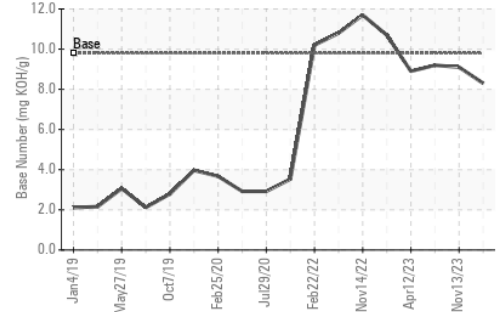

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : GFL0103980  
 Lab Number : 06097529  
 Unique Number : 10890382  
 Test Package : FLEET ( Additional Tests: Glycol )

Received : 22 Feb 2024  
 Tested : 26 Feb 2024  
 Diagnosed : 26 Feb 2024 - Sean Felton

GFL Environmental - 865 - East Mount Hauling  
 7213 East Mount Houston Road  
 Houston, TX  
 US 77050  
 Contact: Saul Castillo  
 saul.castillo@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: