


OIL ANALYSIS REPORT

Sample Rating Trend

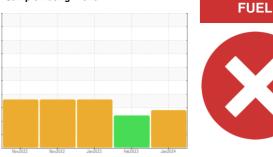

730 Component **Diesel Engine** Fluid

PETRO CANADA DURON HP 15W40 (--- GAL)

DIAGNOSIS

Machine Id

Recommendation

We advise that you check the fuel injection system. The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition. Please specify the component make and model with your next sample.

Wear

All component wear rates are normal.

Contamination

There is a high amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.


Fluid Condition


The BN result indicates that there is suitable alkalinity remaining in the oil. Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

| SAMPLE INFORI | MATION | method | limit/base | current | history1 | history2 |
|---|--|--|---|---|---|--|
| Sample Number | | Client Info | | PCA0096407 | PCA0066366 | PCA0066365 |
| Sample Date | | Client Info | | 31 Jan 2024 | 06 Feb 2023 | 20 Jan 2023 |
| Machine Age | hrs | Client Info | | 14042 | 10683 | 10499 |
| Oil Age | hrs | Client Info | | 500 | 186 | 500 |
| Oil Changed | | Client Info | | Changed | Changed | Changed |
| Sample Status | | | | SEVERE | SEVERE | SEVERE |
| CONTAMINAT | ION | method | limit/base | current | history1 | history2 |
| Water | | WC Method | >0.2 | NEG | NEG | NEG |
| Glycol | | WC Method | | NEG | NEG | NEG |
| WEAR METAL | S | method | limit/base | current | history1 | history2 |
| Iron | ppm | ASTM D5185m | >100 | 10 | 4 | 9 |
| Chromium | ppm | ASTM D5185m | >20 | <1 | <1 | <1 |
| Nickel | ppm | ASTM D5185m | >4 | 0 | 0 | <1 |
| Titanium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Silver | ppm | ASTM D5185m | >3 | 0 | 0 | 0 |
| Aluminum | ppm | ASTM D5185m | >20 | 2 | <1 | 1 |
| Lead | ppm | ASTM D5185m | >40 | - <1 | <1 | <1 |
| Copper | ppm | | | 2 | <1 | <1 |
| Tin | ppm | | >15 | - <1 | <1 | <1 |
| Vanadium | ppm | ASTM D5185m | 210 | 0 | 0 | 0 |
| Cadmium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| | | | | | | |
| ADDITIVES | | method | limit/base | current | history1 | history2 |
| ADDITIVES Boron | ppm | method ASTM D5185m | limit/base | current 7 | history1 2 | history2 1 |
| | ppm ppm | | limit/base | | | |
| Boron Barium | ppm | ASTM D5185m | limit/base | 7 | 2 0 | 1 |
| Boron Barium Molybdenum | ppm ppm | ASTM D5185m ASTM D5185m ASTM D5185m | limit/base | 7 0 40 | 2 0 49 | 1 0 48 |
| Boron Barium Molybdenum Manganese | ppm ppm ppm | ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m | limit/base | 7 0 40 <1 | 2 0 49 <1 | 1 0 48 <1 |
| Boron Barium Molybdenum Manganese Magnesium | ppm ppm ppm ppm | ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m | limit/base | 7 0 40 <1 606 | 2 0 49 <1 794 | 1 0 48 <1 741 |
| Boron Barium Molybdenum Manganese Magnesium Calcium | ppm ppm ppm ppm ppm | ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m | limit/base | 7 0 40 <1 606 749 | 2 0 49 <1 794 928 | 1 0 48 <1 741 910 |
| Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus | ppm ppm ppm ppm ppm ppm | ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m | limit/base | 7 0 40 <1 606 749 712 | 2 0 49 <1 794 928 859 | 1 0 48 <1 741 910 804 |
| Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus | ppm ppm ppm ppm ppm | ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m | limit/base | 7 0 40 <1 606 749 | 2 0 49 <1 794 928 | 1 0 48 <1 741 910 |
| Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc | ppm ppm ppm ppm ppm ppm ppm | ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m | limit/base | 7 0 40 <1 606 749 712 823 | 2 0 49 <1 794 928 859 1028 | 1 0 48 <1 741 910 804 930 |
| Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur | ppm ppm ppm ppm ppm ppm ppm ppm | ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m | limit/base | 7 0 40 <1 606 749 712 823 1935 | 2 0 49 <1 794 928 859 1028 3088 | 1 0 48 <1 741 910 804 930 2809 |
| Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN | ppm ppm ppm ppm ppm ppm ppm | ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m | limit/base | 7 0 40 <1 606 749 712 823 1935 current | 2 0 49 <1 794 928 859 1028 3088 history1 | 1 0 48 <1 741 910 804 930 2809 history2 |
| Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon | ppm ppm ppm ppm ppm ppm ppm ppm TS | ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m method ASTM D5185m | limit/base >25 | 7 0 40 <1 606 749 712 823 1935 current 5 | 2 0 49 <1 794 928 859 1028 3088 history1 4 | 1 0 48 <1 741 910 804 930 2809 history2 8 |
| Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium | ppm ppm ppm ppm ppm ppm ppm ppm ppm TS | ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m method ASTM D5185m | limit/base >25 >20 | 7 0 40 <1 606 749 712 823 1935 <u>current</u> 5 3 | 2 0 49 <1 794 928 859 1028 3088 history1 4 2 | 1 0 48 <1 741 910 804 930 2809 history2 8 3 |
| Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium | ppm ppm ppm ppm ppm ppm ppm ppm TS | ASTM D5185m ASTM D5185m | limit/base >25 >20 | 7 0 40 <1 606 749 712 823 1935 <u>current</u> 5 3 2 | 2 0 49 <1 794 928 859 1028 3088 history1 4 2 2 <1 | 1 0 48 <1 741 910 804 930 2809 history2 8 3 3 |
| Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium Fuel | ppm ppm ppm ppm ppm ppm ppm ppm TS | ASTM D5185m ASTM D5185m | limit/base >25 >20 >5 limit/base | 7 0 40 <1 606 749 712 823 1935 <u>current</u> 5 3 2 2 30.7 | 2 0 49 <1 794 928 859 1028 3088 history1 4 2 <1 4 17.7 | 1 0 48 <1 741 910 804 930 2809 bistory2 8 3 3 3 € 25.2 |
| Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium Fuel INFRA-RED | ppm ppm ppm ppm ppm ppm ppm ppm TS ppm ppm ppm % | ASTM D5185m ASTM D5185m | limit/base >25 >20 >5 limit/base >3 | 7 0 40 <1 606 749 712 823 1935 current 5 3 2 30.7 current 0.2 | 2 0 49 <1 794 928 859 1028 3088 history1 4 2 <1 2 <1 ↓ 17.7 history1 0.1 | 1 0 48 <1 741 910 804 930 2809 bistory2 8 3 3 3 3 2 5.2 bistory2 |
| Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium Fuel INFRA-RED Soot % | ppm ppm ppm ppm ppm ppm ppm TS ppm ppm ppm % | ASTM D5185m ASTM D5185m | limit/base >25 >20 >5 limit/base >3 >20 | 7 0 40 <1 606 749 712 823 1935 Current 5 3 2 2 30.7 € | 2 0 49 <1 794 928 859 1028 3088 history1 4 2 <1 € 17.7 | 1 0 48 <1 741 910 804 930 2809 history2 8 3 3 3 2 5.2 history2 0.1 |
| Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium Fuel INFRA-RED Soot % Nitration | ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm | ASTM D5185m ASTM D5185m | limit/base >25 >20 >5 limit/base >3 >20 | 7 0 40 <1 606 749 712 823 1935 current 5 3 2 30.7 current 0.2 8.2 | 2 0 49 <1 794 928 859 1028 3088 history1 4 2 <1 ↓ 17.7 history1 0.1 6.3 | 1 0 48 <1 741 910 804 930 2809 history2 8 3 3 25.2 history2 0.1 8.1 |
| Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium Fuel INFRA-RED Soot % Nitration Sulfation | ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm | ASTM D5185m ASTM D5185m | Imit/base >25 >20 >5 Imit/base >3 >20 >3 >30 Imit/base | 7 0 40 <1 606 749 712 823 1935 Current 5 3 2 30.7 € Current 0.2 8.2 17.9 € | 2 0 49 <1 794 928 859 1028 3088 history1 4 2 <1 ↓ 17.7 history1 0.1 6.3 26.1 ↓ | 1 0 48 <1 741 910 804 930 2809 history2 8 3 3 2809 bistory2 0.1 8.1 30.4 bistory2 |
| Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium Fuel INFRA-RED Soot % Nitration Sulfation | ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm | ASTM D5185m ASTM D5185m | limit/base >25 >20 >20 >5 limit/base >3 >20 >30 >30 limit/base >25 | 7 0 40 <1 606 749 712 823 1935 current 5 3 2 30.7 current 0.2 8.2 17.9 | 2 0 49 <1 794 928 859 1028 3088 history1 4 2 <1 € 17.7 history1 0.1 6.3 26.1 | 1 0 48 <1 741 910 804 930 2809 history2 8 3 3 3 3 2 5.2 history2 0.1 8.1 3.0.4 |



OIL ANALYSIS REPORT

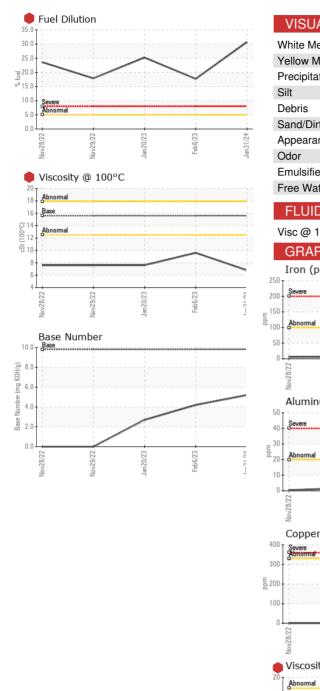

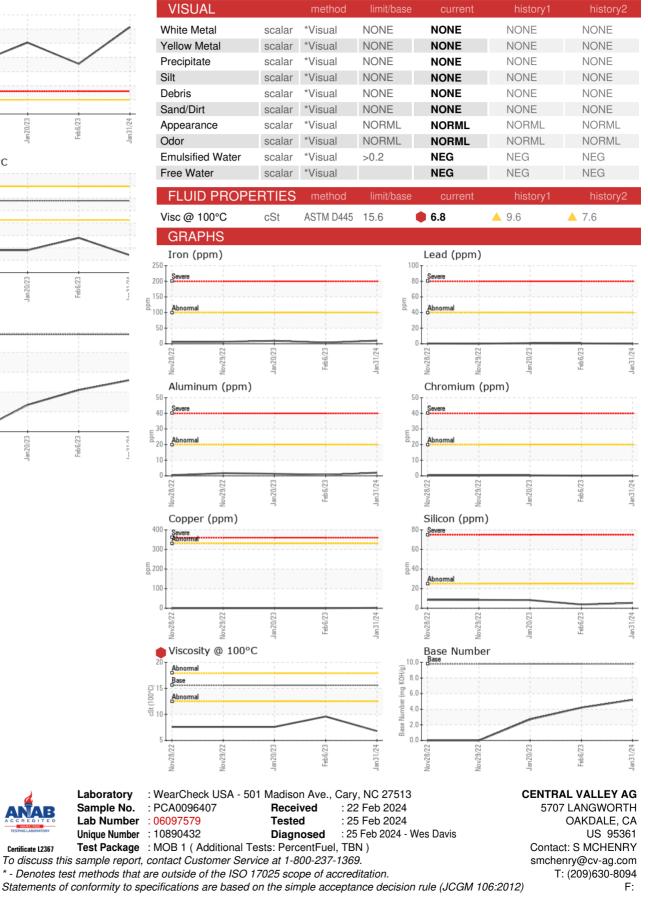

Certificate L2367

Laboratory