


OIL ANALYSIS REPORT

Sample Rating Trend



WEAR

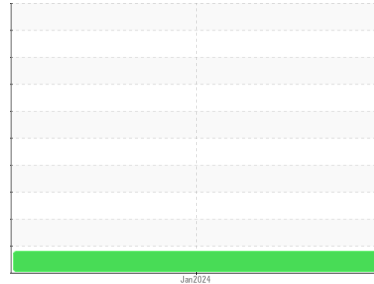

Machine Id

730

Component

Rear Differential

Fluid

JOHN DEERE HY-GARD HYDRAULIC/RANSMISSION (--- GAL)

DIAGNOSIS

▲ Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

▲ Wear

Bearing and/or bushing wear is indicated. All other component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

| | method | limit/base | current | history1 | history2 |
|---------------|-------------|-------------|--------------------|----------|----------|
| Sample Number | Client Info | | PCA0096406 | --- | --- |
| Sample Date | Client Info | | 31 Jan 2024 | --- | --- |
| Machine Age | hrs | Client Info | 14042 | --- | --- |
| Oil Age | hrs | Client Info | 500 | --- | --- |
| Oil Changed | | Client Info | N/A | --- | --- |
| Sample Status | | | ABNORMAL | --- | --- |

CONTAMINATION

| | method | limit/base | current | history1 | history2 |
|-------|-----------|------------|------------|----------|----------|
| Water | WC Method | >.2 | NEG | --- | --- |

WEAR METALS

| | method | limit/base | current | history1 | history2 |
|----------|--------|------------------|--------------|----------|----------|
| Iron | ppm | ASTM D5185m >500 | 70 | --- | --- |
| Chromium | ppm | ASTM D5185m >10 | 0 | --- | --- |
| Nickel | ppm | ASTM D5185m >10 | 0 | --- | --- |
| Titanium | ppm | ASTM D5185m | 0 | --- | --- |
| Silver | ppm | ASTM D5185m | 0 | --- | --- |
| Aluminum | ppm | ASTM D5185m >25 | 1 | --- | --- |
| Lead | ppm | ASTM D5185m >25 | ▲ 71 | --- | --- |
| Copper | ppm | ASTM D5185m >100 | 32 | --- | --- |
| Tin | ppm | ASTM D5185m >10 | <1 | --- | --- |
| Vanadium | ppm | ASTM D5185m | 0 | --- | --- |
| Cadmium | ppm | ASTM D5185m | 0 | --- | --- |

ADDITIVES

| | method | limit/base | current | history1 | history2 |
|------------|--------|-------------|-------------|----------|----------|
| Boron | ppm | ASTM D5185m | 5 | --- | --- |
| Barium | ppm | ASTM D5185m | 0 | --- | --- |
| Molybdenum | ppm | ASTM D5185m | 2 | --- | --- |
| Manganese | ppm | ASTM D5185m | 0 | --- | --- |
| Magnesium | ppm | ASTM D5185m | 80 | --- | --- |
| Calcium | ppm | ASTM D5185m | 2476 | --- | --- |
| Phosphorus | ppm | ASTM D5185m | 1034 | --- | --- |
| Zinc | ppm | ASTM D5185m | 1035 | --- | --- |
| Sulfur | ppm | ASTM D5185m | 3687 | --- | --- |



CONTAMINANTS

| | method | limit/base | current | history1 | history2 |
|-----------|--------|-----------------|----------|----------|----------|
| Silicon | ppm | ASTM D5185m >75 | 4 | --- | --- |
| Sodium | ppm | ASTM D5185m | 0 | --- | --- |
| Potassium | ppm | ASTM D5185m >20 | 2 | --- | --- |

VISUAL

| | method | limit/base | current | history1 | history2 |
|------------------|--------|---------------|--------------|----------|----------|
| White Metal | scalar | *Visual NONE | NONE | --- | --- |
| Yellow Metal | scalar | *Visual NONE | NONE | --- | --- |
| Precipitate | scalar | *Visual NONE | NONE | --- | --- |
| Silt | scalar | *Visual NONE | NONE | --- | --- |
| Debris | scalar | *Visual NONE | NONE | --- | --- |
| Sand/Dirt | scalar | *Visual NONE | NONE | --- | --- |
| Appearance | scalar | *Visual NORML | NORML | --- | --- |
| Odor | scalar | *Visual NORML | NORML | --- | --- |
| Emulsified Water | scalar | *Visual >.2 | NEG | --- | --- |
| Free Water | scalar | *Visual | NEG | --- | --- |

OIL ANALYSIS REPORT

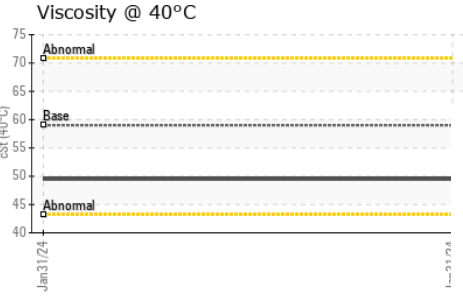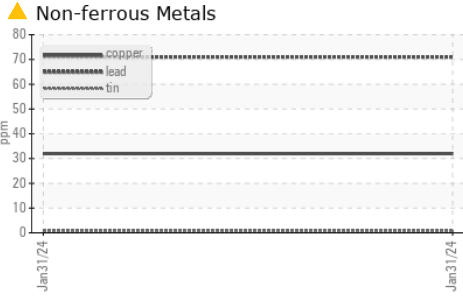









FLUID PROPERTIES

| method | limit/base | current | history1 | history2 |
|-------------|---------------|---------|-------------|----------|
| Visc @ 40°C | cSt ASTM D445 | 59 | 49.5 | --- |

SAMPLE IMAGES

| method | limit/base | current | history1 | history2 |
|--------|------------|---------|----------|----------|
| Color | | | no image | no image |
| Bottom | | | no image | no image |

GRAPHS

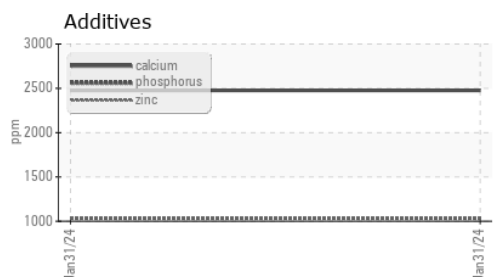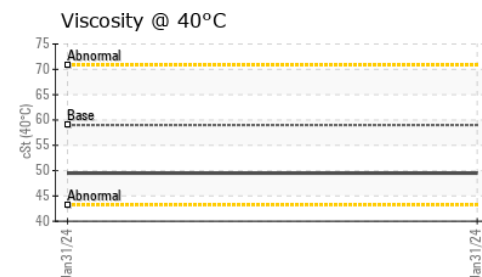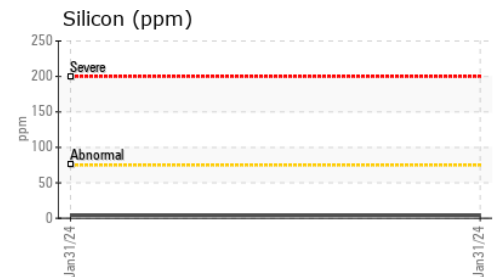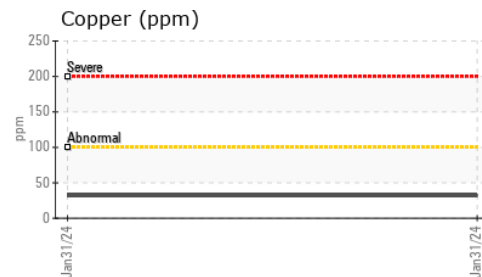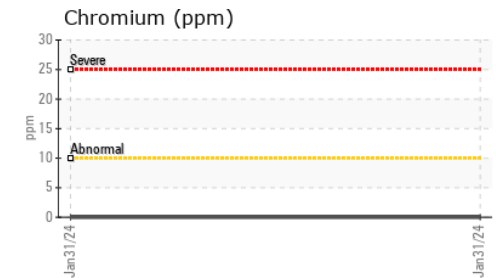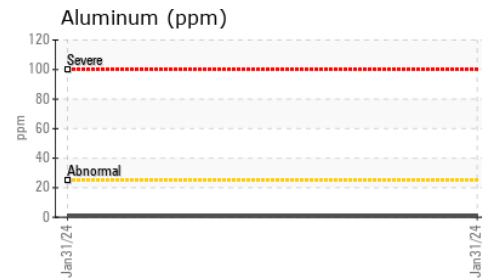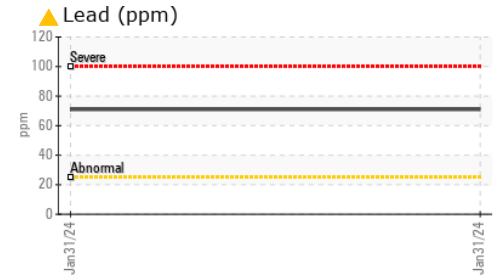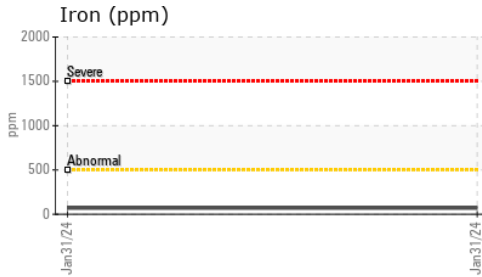

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0096406
Lab Number : 06098014
Unique Number : 10896244
Test Package : MOB 1

Received : 22 Feb 2024
Tested : 23 Feb 2024
Diagnosed : 25 Feb 2024 - Don Baldrige

CENTRAL VALLEY AG
 5707 LANGWORTH
 OAKDALE, CA
 US 95361
 Contact: LAB TECH
 m-labtech@outlook.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: