




# OIL ANALYSIS REPORT

Sample Rating Trend

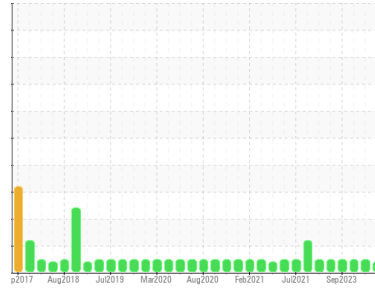

## VISCOSITY



Machine Id  
**CUMMINS 10804**

Component  
**Diesel Engine**

Fluid  
**DIESEL ENGINE OIL SAE 40 (8 GAL)**

### DIAGNOSIS

#### ▲ Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### ▲ Fluid Condition

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

### SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0109054</b>	GFL0109075	GFL0086190
Sample Date	Client Info		<b>21 Feb 2024</b>	08 Feb 2024	27 Sep 2023
Machine Age	hrs	Client Info	<b>16387</b>	16346	14854
Oil Age	hrs	Client Info	<b>1533</b>	16346	15890
Oil Changed	Client Info		<b>N/A</b>	N/A	N/A
Sample Status			<b>ATTENTION</b>	NORMAL	NORMAL

### CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

### WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>12</b>	18	9
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	1	<1
Nickel	ppm	ASTM D5185m >4	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m	<b>0</b>	0	0
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>3</b>	11	7
Lead	ppm	ASTM D5185m >40	<b>0</b>	0	0
Copper	ppm	ASTM D5185m >330	<b>8</b>	<1	<1
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	0	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	<1
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

### ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 250	<b>13</b>	12	11
Barium	ppm	ASTM D5185m 10	<b>0</b>	8	0
Molybdenum	ppm	ASTM D5185m 100	<b>57</b>	65	62
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	0	<1
Magnesium	ppm	ASTM D5185m 450	<b>739</b>	728	804
Calcium	ppm	ASTM D5185m 3000	<b>1014</b>	1004	1098
Phosphorus	ppm	ASTM D5185m 1150	<b>922</b>	808	928
Zinc	ppm	ASTM D5185m 1350	<b>1065</b>	1045	1156
Sulfur	ppm	ASTM D5185m 4250	<b>2633</b>	2697	2877

### CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>4</b>	3	3
Sodium	ppm	ASTM D5185m >216	<b>4</b>	0	<1
Potassium	ppm	ASTM D5185m >20	<b>4</b>	2	14
Fuel	%	ASTM D3524 >5	<b>&lt;1.0</b>	0.5	<1.0

### INFRA-RED




	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.5</b>	0.7	0.4
Nitration	Abs/cm	*ASTM D7624 >20	<b>7.9</b>	8.4	7.7
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>18.7</b>	18.1	18.1

### FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>14.0</b>	13.2	13.7
Base Number (BN)	mg KOH/g	ASTM D2896 8.5	<b>7.3</b>	6.6	6.9







# OIL ANALYSIS REPORT

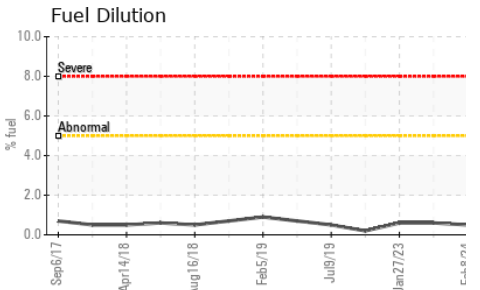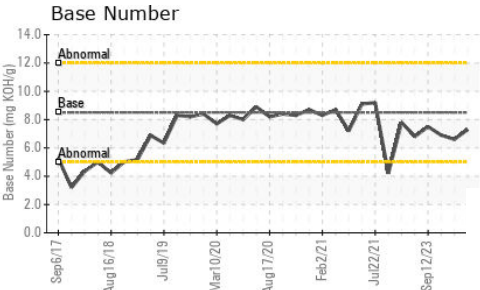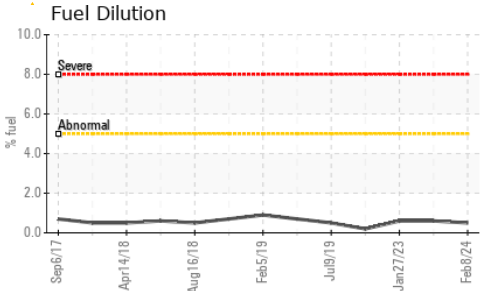

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.4 ▲ 12.2	11.9	12.7

## GRAPHS

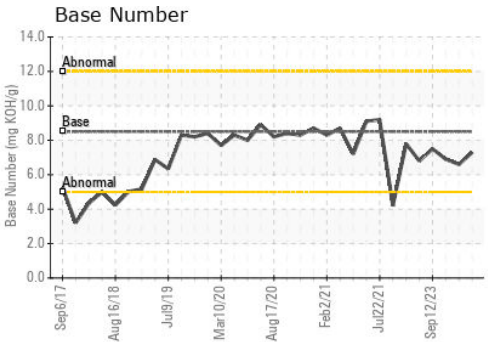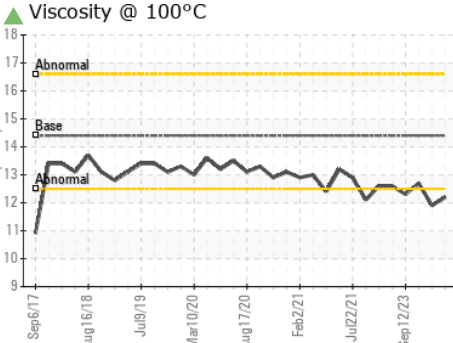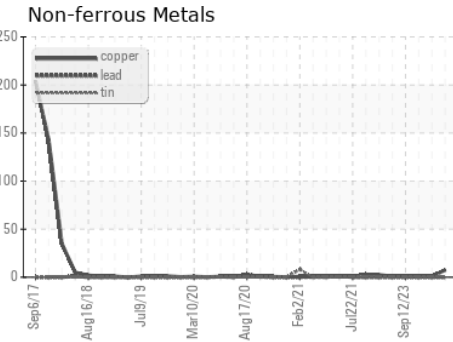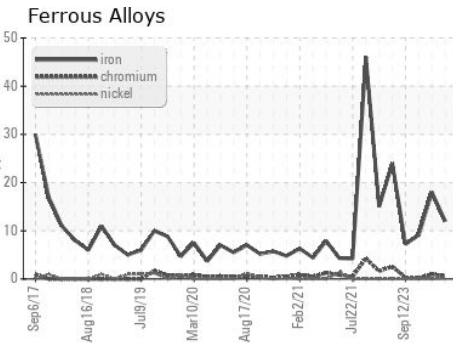

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0109054 **Received** : 23 Feb 2024  
**Lab Number** : 06098144 **Tested** : 26 Feb 2024  
**Unique Number** : 10896374 **Diagnosed** : 26 Feb 2024 - Don Baldrige  
**Test Package** : FLEET ( Additional Tests: FuelDilution )

**GFL Environmental - 009 - Fairburn**  
 6905 Roosevelt Hwy  
 Fairburn, GA  
 US 30213  
 Contact: Eric Jones  
 erjones@gflenv.com  
 T: (678)630-9927  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)