




PROBLEM SUMMARY

Area
020
 Machine Id
10759
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (34 QTS)

Sample Rating Trend

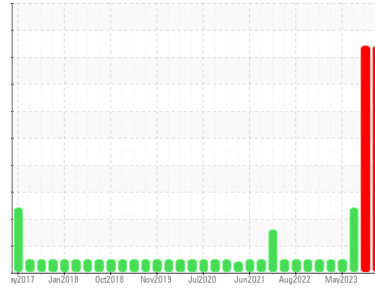


GLYCOL



COMPONENT CONDITION SUMMARY

Glycol Contamination

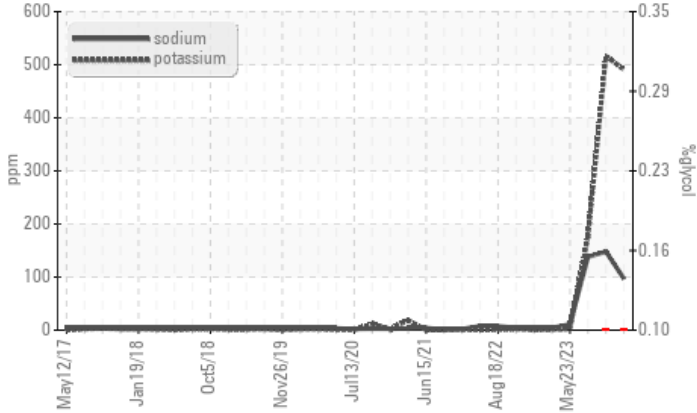

RECOMMENDATION

We advise that you check for the source of the coolant leak. The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

PROBLEMATIC TEST RESULTS

Sample Status				SEVERE	SEVERE	ABNORMAL
Potassium	ppm	ASTM D5185m	>20	▲ 491	▲ 516	▲ 175
Glycol	%	*ASTM D2982		● 0.10	● 0.10	NEG

Customer Id: GFL020
 Sample No.: GFL0103795
 Lab Number: 06098146
 Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Wes Davis +1 905-569-8600 x223
wesd@wearcheck.ca

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Resample	---	---	?	We recommend an early resample to monitor this condition.
Check Glycol Access	---	---	?	We advise that you check for the source of the coolant leak.

HISTORICAL DIAGNOSIS

30 Nov 2023 Diag: Jonathan Hester

GLYCOL



We advise that you check for the source of the coolant leak. Check for low coolant level. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition. All component wear rates are normal. Sodium and/or potassium levels are high. Test for glycol is positive. The BN result indicates that there is suitable alkalinity remaining in the oil. The oil is no longer serviceable due to the presence of contaminants.

view report



17 Aug 2023 Diag: Jonathan Hester

GLYCOL



We advise that you check for the source of the coolant leak. Check for low coolant level. We recommend an early resample to monitor this condition. All component wear rates are normal. Sodium and/or potassium levels are high. The BN result indicates that there is suitable alkalinity remaining in the oil.

view report



23 May 2023 Diag: Wes Davis

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.


view report





OIL ANALYSIS REPORT

Sample Rating Trend

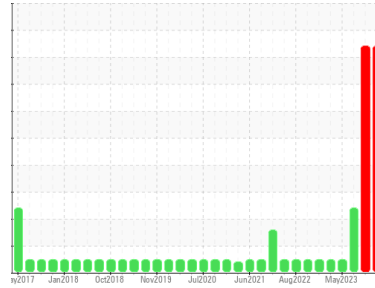

GLYCOL



Area
020
 Machine Id
10759
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (34 QTS)

DIAGNOSIS

Recommendation

We advise that you check for the source of the coolant leak. The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

Contamination

Test for glycol is positive. There is a high concentration of glycol present in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0103795	GFL0103802	GFL0091175
Sample Date	Client Info		22 Feb 2024	30 Nov 2023	17 Aug 2023
Machine Age	hrs	Client Info	17878	17302	0
Oil Age	hrs	Client Info	576	801	600
Oil Changed	Client Info		Changed	Changed	Not Changed
Sample Status			SEVERE	SEVERE	ABNORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<1.0	<1.0	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >75	31	32	32
Chromium	ppm	ASTM D5185m >5	1	1	2
Nickel	ppm	ASTM D5185m >4	<1	<1	<1
Titanium	ppm	ASTM D5185m >2	0	0	0
Silver	ppm	ASTM D5185m >2	0	0	0
Aluminum	ppm	ASTM D5185m >15	6	4	4
Lead	ppm	ASTM D5185m >25	1	1	3
Copper	ppm	ASTM D5185m >100	<1	<1	1
Tin	ppm	ASTM D5185m >4	<1	0	<1
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	7	4	4
Barium	ppm	ASTM D5185m 0	0	2	0
Molybdenum	ppm	ASTM D5185m 60	61	63	68
Manganese	ppm	ASTM D5185m 0	<1	0	<1
Magnesium	ppm	ASTM D5185m 1010	894	884	950
Calcium	ppm	ASTM D5185m 1070	1025	1080	1151
Phosphorus	ppm	ASTM D5185m 1150	1018	977	1057
Zinc	ppm	ASTM D5185m 1270	1202	1194	1301
Sulfur	ppm	ASTM D5185m 2060	2870	4472	3309

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	11	13	10
Sodium	ppm	ASTM D5185m	▲ 97	▲ 148	▲ 138
Potassium	ppm	ASTM D5185m >20	▲ 491	▲ 516	▲ 175
Glycol	%	*ASTM D2982	◆ 0.10	◆ 0.10	NEG

INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >6	0.9	1	1.2
Nitration	Abs/cm	*ASTM D7624 >20	10.3	10.6	10.7
Sulfation	Abs/.1mm	*ASTM D7415 >30	22.2	23.0	22.4


FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	18.0	18.0	18.0
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	8.0	8.2	7.9




OIL ANALYSIS REPORT

Glycol Contamination

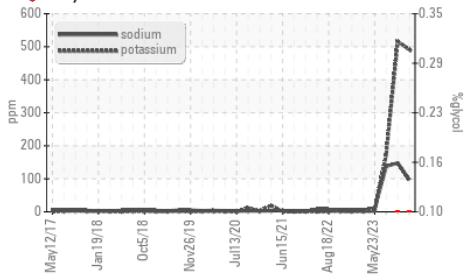


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

Base Number

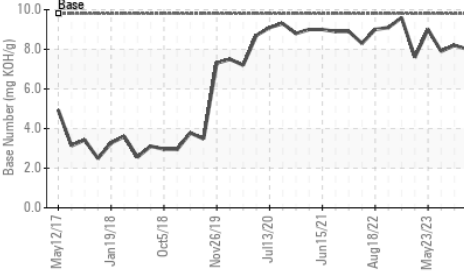


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	13.5	13.8

Viscosity @ 100°C

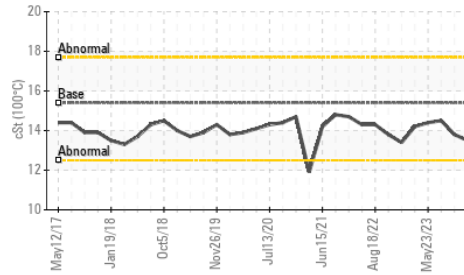


GRAPHS


Ferrous Alloys

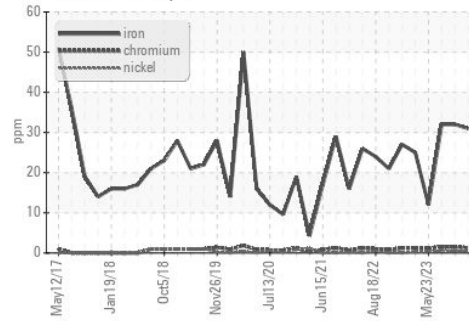


Non-ferrous Metals

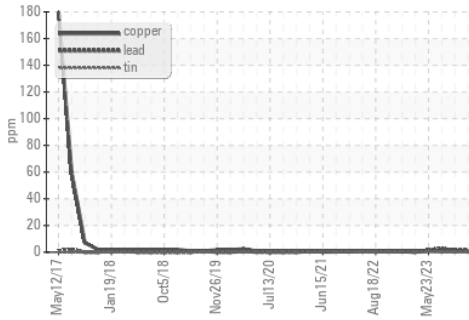

Viscosity @ 100°C

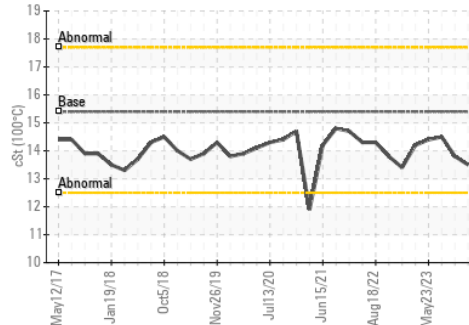

Base Number

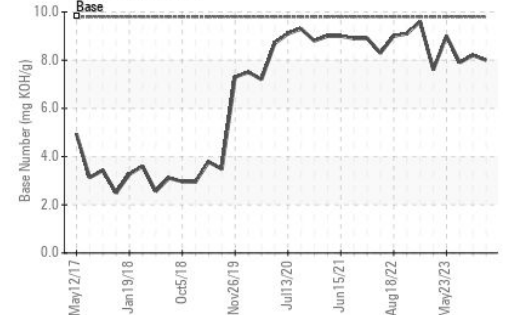

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : GFL0103795
 Lab Number : 06098146
 Unique Number : 10896376
 Test Package : FLEET

Received : 23 Feb 2024
 Tested : 26 Feb 2024
 Diagnosed : 26 Feb 2024 - Wes Davis

GFL Environmental - 020 - Alamance
 703 East Gilbreath St
 Graham, NC
 US 27253

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact: richard.belcher@gflenv.com

T: (800)207-6618

F: (336)229-0526