


# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

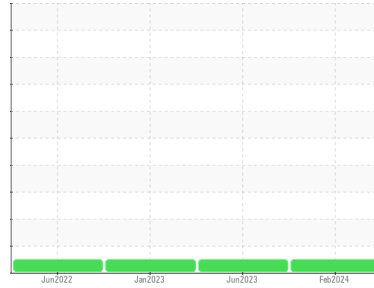

Machine Id  
**1926744**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 10W30 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PCA0118393</b>	PCA0099519	PCA0087251
Sample Date	Client Info			<b>10 Feb 2024</b>	22 Jun 2023	11 Jan 2023
Machine Age	mls	Client Info		<b>0</b>	232611	0
Oil Age	mls	Client Info		<b>20000</b>	20000	20000
Oil Changed	Client Info			<b>Changed</b>	Changed	Not Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2		<b>NEG</b>	NEG	NEG
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	<b>31</b>	34	29
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>4	<b>2</b>	5	3
Titanium	ppm	ASTM D5185m		<b>1</b>	5	6
Silver	ppm	ASTM D5185m	>3	<b>&lt;1</b>	0	<1
Aluminum	ppm	ASTM D5185m	>20	<b>4</b>	7	7
Lead	ppm	ASTM D5185m	>40	<b>&lt;1</b>	<1	2
Copper	ppm	ASTM D5185m	>330	<b>8</b>	14	17
Tin	ppm	ASTM D5185m	>15	<b>1</b>	1	1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	<1
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0



ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	<b>3</b>	2	3
Barium	ppm	ASTM D5185m	0	<b>0</b>	2	<1
Molybdenum	ppm	ASTM D5185m	50	<b>54</b>	56	53
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	950	<b>819</b>	819	843
Calcium	ppm	ASTM D5185m	1050	<b>994</b>	1172	1180
Phosphorus	ppm	ASTM D5185m	995	<b>863</b>	921	939
Zinc	ppm	ASTM D5185m	1180	<b>1103</b>	1182	1203
Sulfur	ppm	ASTM D5185m	2600	<b>2511</b>	3176	3205

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>5</b>	5	5
Sodium	ppm	ASTM D5185m		<b>8</b>	9	5
Potassium	ppm	ASTM D5185m	>20	<b>7</b>	12	11

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0.4</b>	0.4	0.4
Nitration	Abs/cm	*ASTM D7624	>20	<b>9.7</b>	10.4	9.8
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>21.7</b>	21.3	19.8

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>18.0</b>	17.4	16.3
Base Number (BN)	mg KOH/g	ASTM D2896		<b>5.4</b>	7.0	7.1





# OIL ANALYSIS REPORT

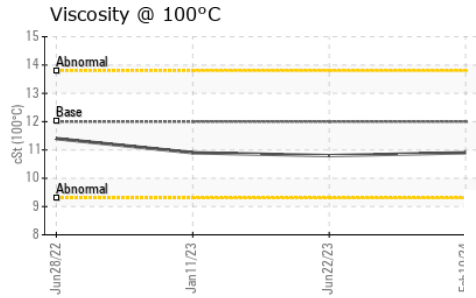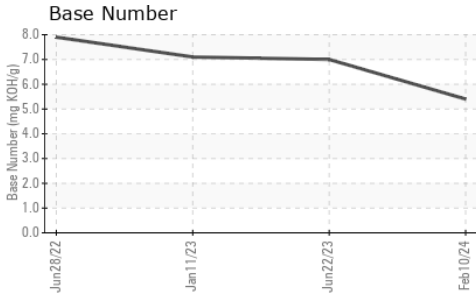

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

PARAMETER	method	limit/base	current	history1	history2	
FLUID PROPERTIES						
Visc @ 100°C	cSt	ASTM D445	12.00	<b>10.9</b>	10.8	10.9

## GRAPHS

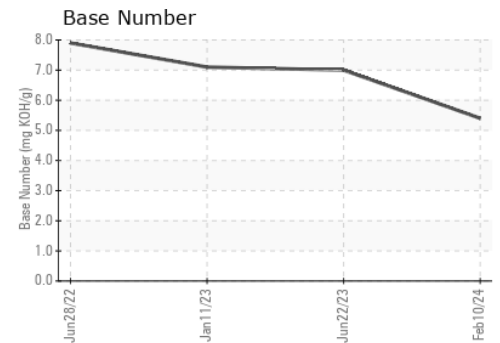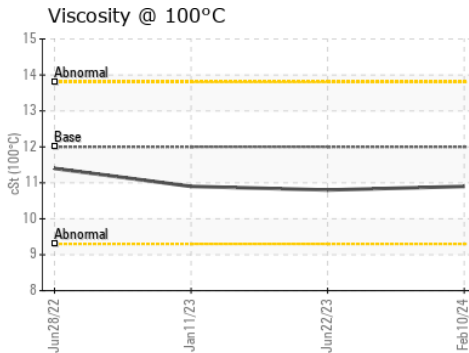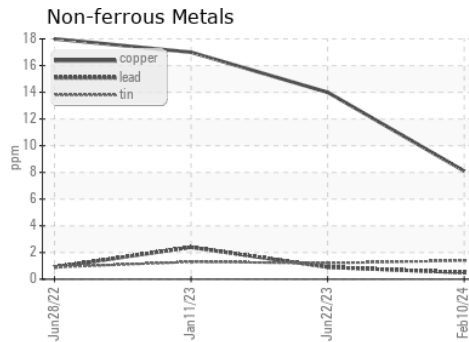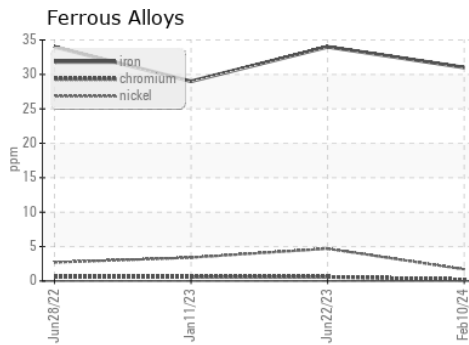

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0118393  
**Lab Number** : 06098151  
**Unique Number** : 10896381  
**Test Package** : FLEET

**Received** : 23 Feb 2024  
**Tested** : 25 Feb 2024  
**Diagnosed** : 25 Feb 2024 - Wes Davis

**PERDUE FARMS - SALISBURY**  
 7036 ZION CHURCH ROAD  
 SALISBURY, MD  
 US 21802  
 Contact: RICHARD O'NEAL  
 richard.oneal@perdue.com  
 T: (410)543-3628  
 F: (410)341-2164

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)