




# OIL ANALYSIS REPORT

Sample Rating Trend

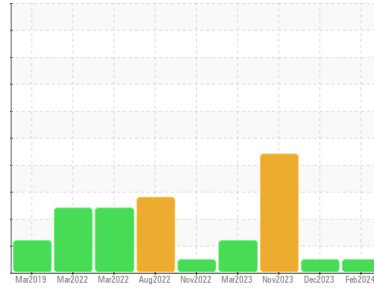

**NORMAL**



Machine Id  
**425069-402432**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0109309</b>	GFL0077266	GFL0093534
Sample Date	Client Info		<b>20 Feb 2024</b>	19 Dec 2023	10 Nov 2023
Machine Age	hrs	Client Info	<b>36361</b>	36319	36296
Oil Age	hrs	Client Info	<b>609</b>	24	423
Oil Changed	Client Info		<b>Not Chngd</b>	Not Chngd	Changed
Sample Status			<b>NORMAL</b>	NORMAL	ABNORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >120	<b>8</b>	15	37
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	1
Nickel	ppm	ASTM D5185m >5	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185m >2	<b>&lt;1</b>	<1	1
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	2
Lead	ppm	ASTM D5185m >40	<b>0</b>	2	6
Copper	ppm	ASTM D5185m >330	<b>2</b>	3	9
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	0	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	<1	<1
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	<1

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>2</b>	<1	1
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	<1
Molybdenum	ppm	ASTM D5185m 60	<b>62</b>	60	73
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	0	<1
Magnesium	ppm	ASTM D5185m 1010	<b>872</b>	877	856
Calcium	ppm	ASTM D5185m 1070	<b>988</b>	958	1009
Phosphorus	ppm	ASTM D5185m 1150	<b>933</b>	921	934
Zinc	ppm	ASTM D5185m 1270	<b>1003</b>	1123	1120
Sulfur	ppm	ASTM D5185m 2060	<b>2838</b>	2896	2693

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>2</b>	4	4
Sodium	ppm	ASTM D5185m	<b>31</b>	19	▲ 74
Potassium	ppm	ASTM D5185m >20	<b>47</b>	30	▲ 124
Glycol	%	*ASTM D2982	<b>NEG</b>	NEG	NEG

## INFRA-RED




	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >4	<b>1.6</b>	1.2	▲ 5.9
Nitration	Abs/cm	*ASTM D7624 >20	<b>6.2</b>	5.5	18.7
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>19.9</b>	19.2	36.5

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>12.8</b>	12.8	31.0
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>9.9</b>	9.8	▲ 0.0







# OIL ANALYSIS REPORT

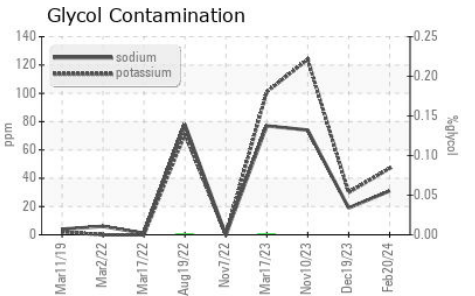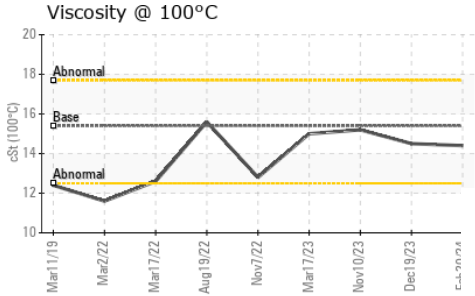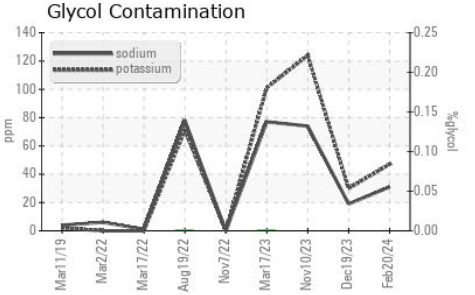

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>14.4</b>	14.5	15.2

## GRAPHS

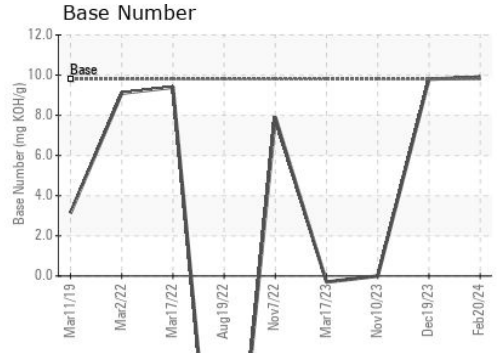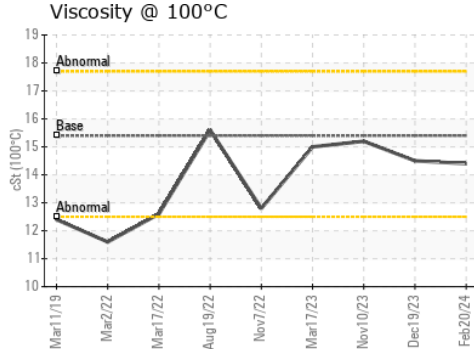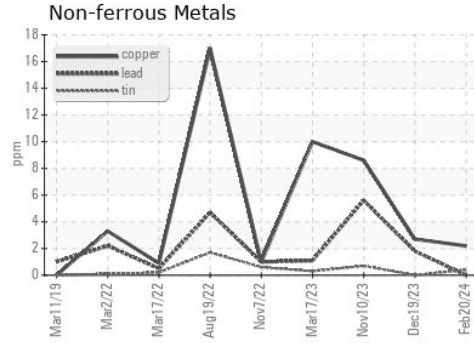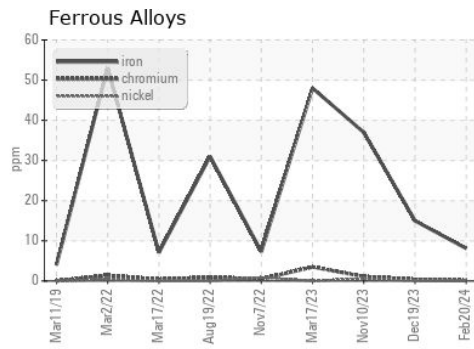

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0109309 **Received** : 23 Feb 2024  
**Lab Number** : 06098272 **Tested** : 28 Feb 2024  
**Unique Number** : 10896502 **Diagnosed** : 28 Feb 2024 - Jonathan Hester  
**Test Package** : FLEET ( Additional Tests: Glycol )

**GFL Environmental - 891 - Oklahoma City Hauling**  
 1001 South Rockwell  
 Oklahoma City, OK  
 US 73128  
 Contact: Andy Smith  
 andrew.smith@gflenv.com  
 T: (405)306-1651  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)