




# OIL ANALYSIS REPORT

Sample Rating Trend

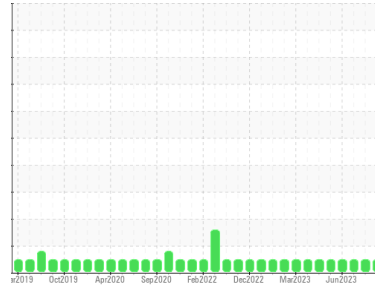

**NORMAL**



Machine Id  
**749005-310061**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0106823</b>	GFL0084580	GFL0092034
Sample Date	Client Info		<b>21 Feb 2024</b>	21 Dec 2023	02 Dec 2023
Machine Age	hrs	Client Info	<b>14444</b>	14082	625869
Oil Age	hrs	Client Info	<b>0</b>	625869	625869
Oil Changed	Client Info		<b>Changed</b>	Changed	Not Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	0.0	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>8</b>	20	11
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	1	<1
Nickel	ppm	ASTM D5185m >4	<b>0</b>	<1	0
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>&lt;1</b>	3	1
Lead	ppm	ASTM D5185m >40	<b>0</b>	<1	0
Copper	ppm	ASTM D5185m >330	<b>&lt;1</b>	2	1
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	<1	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>20</b>	11	15
Barium	ppm	ASTM D5185m 0	<b>0</b>	13	4
Molybdenum	ppm	ASTM D5185m 60	<b>52</b>	58	52
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	2	<1
Magnesium	ppm	ASTM D5185m 1010	<b>497</b>	555	523
Calcium	ppm	ASTM D5185m 1070	<b>1490</b>	1454	1385
Phosphorus	ppm	ASTM D5185m 1150	<b>676</b>	773	689
Zinc	ppm	ASTM D5185m 1270	<b>760</b>	908	857
Sulfur	ppm	ASTM D5185m 2060	<b>2222</b>	2457	2529

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>5</b>	18	11
Sodium	ppm	ASTM D5185m	<b>63</b>	115	76
Potassium	ppm	ASTM D5185m >20	<b>7</b>	29	21

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0</b>	0	0
Nitration	Abs/cm	*ASTM D7624 >20	<b>9.5</b>	9.8	8.7
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>19.7</b>	19.4	19.3

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>16.8</b>	17.3	16.8
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>6.3</b>	6.7	7.5







# OIL ANALYSIS REPORT

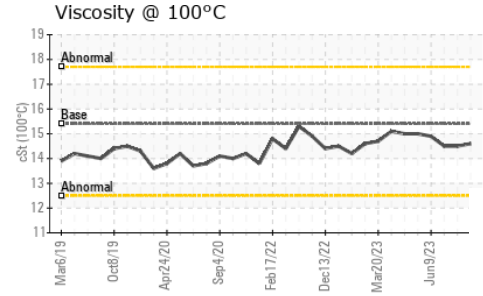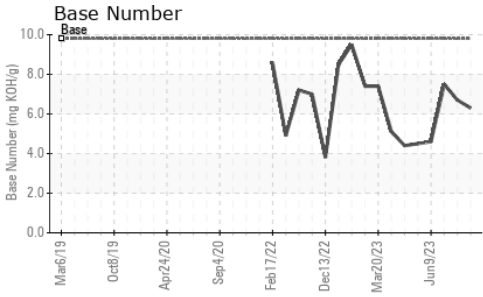

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>14.6</b>	14.5	14.5

## GRAPHS

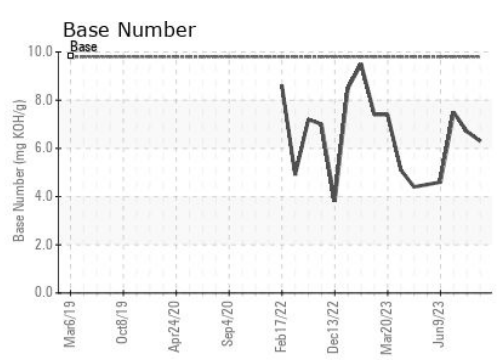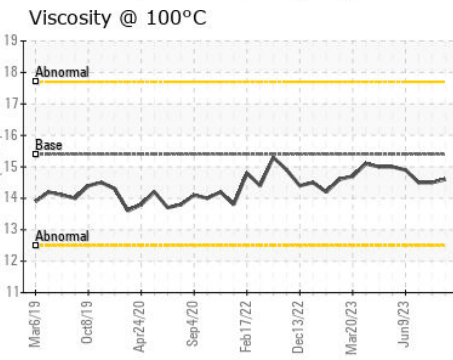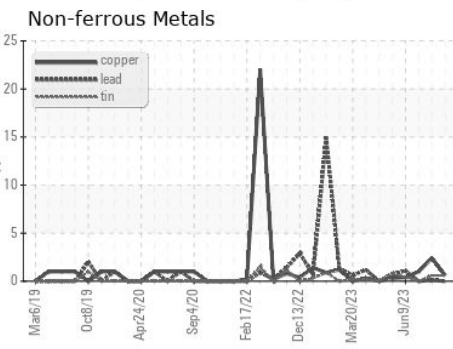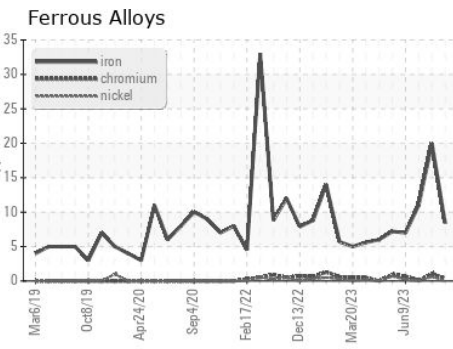

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0106823  
**Lab Number** : **06098274**  
**Unique Number** : 10896504  
**Test Package** : FLEET  
**Received** : 23 Feb 2024  
**Tested** : 26 Feb 2024  
**Diagnosed** : 26 Feb 2024 - Sean Felton

**GFL Environmental - 856 - Houston South**  
 8515 Highway 6 South  
 Houston, TX  
 US 77083  
 Contact: Apolinar Zacarias  
 pzacariascano@gflenv.com  
 T:  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)