



PROBLEM SUMMARY

Sample Rating Trend


GLYCOL






Machine Id
10564

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (11 GAL)

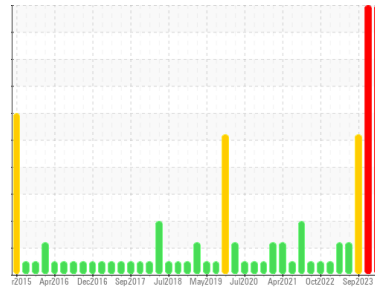

COMPONENT CONDITION SUMMARY

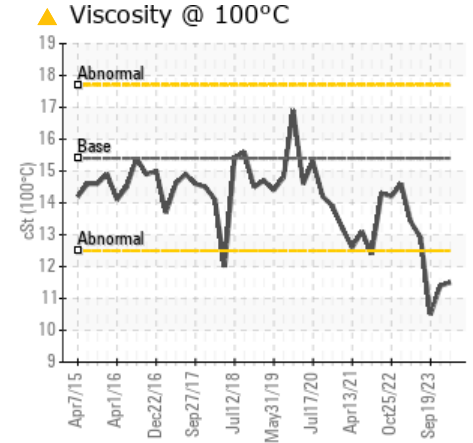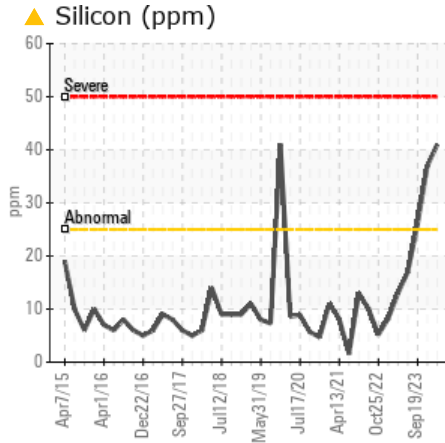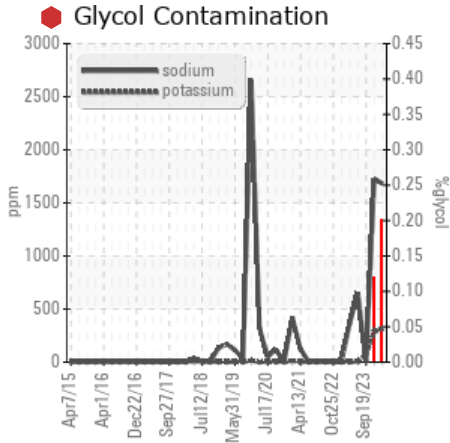

RECOMMENDATION

We advise that you check for the source of the coolant leak. Check for low coolant level. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

PROBLEMATIC TEST RESULTS

Sample Status				SEVERE	SEVERE	ABNORMAL
Silicon	ppm	ASTM D5185m	>25	▲ 41	▲ 37	▲ 26
Sodium	ppm	ASTM D5185m		▲ 1682	▲ 1726	6
Potassium	ppm	ASTM D5185m	>20	▲ 314	▲ 288	71
Glycol	%	*ASTM D2982		● 0.20	● 0.12	NEG

Customer Id: GFL094
Sample No.: GFL0072053
Lab Number: 06098925
Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:
Don Baldrige +1
don.b505@comcast.net

To change component or sample information:
Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Fluid	---	---	?	Oil and filter change at the time of sampling has been noted.
Change Filter	---	---	?	Oil and filter change at the time of sampling has been noted.
Resample	---	---	?	We recommend an early resample to monitor this condition.
Check Glycol Access	---	---	?	We advise that you check for the source of the coolant leak.

HISTORICAL DIAGNOSIS

17 Jan 2024 Diag: Jonathan Hester

GLYCOL



We advise that you check for the source of the coolant leak. Check for low coolant level. We recommend that you drain the oil and perform a filter service on this component if not already done. We recommend an early resample to monitor this condition. All component wear rates are normal. Sodium and/or potassium levels are high. Test for glycol is positive. Elemental level of silicon (Si) above normal indicating ingress of seal material. The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type. The oil is no longer serviceable due to the presence of contaminants.

view report



19 Sep 2023 Diag: Jonathan Hester

DIRT



We advise that you check the air filter, air induction system, and any areas where dirt may enter the component. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. Piston, ring and cylinder wear is indicated. Bearing and/or bushing wear is indicated. Fuel content negligible. Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress. The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

view report



23 Jun 2023 Diag: Jonathan Hester

GLYCOL



We advise that you check for possible coolant leak. Check for low coolant level. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition. All component wear rates are normal. Sodium and/or potassium levels are high. The BN result indicates that there is suitable alkalinity remaining in the oil.


view report





OIL ANALYSIS REPORT

Sample Rating Trend

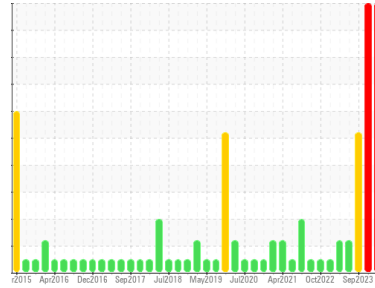

GLYCOL



Machine Id
10564

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (11 GAL)

DIAGNOSIS

Recommendation

We advise that you check for the source of the coolant leak. Check for low coolant level. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

Contamination

Sodium and/or potassium levels are high. Test for glycol is positive. Elemental level of silicon (Si) above normal indicating ingress of seal material.

Fluid Condition

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type. The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0072053	GFL0072064	GFL0092461
Sample Date	Client Info	12 Feb 2024	17 Jan 2024	19 Sep 2023
Machine Age	hrs	22188	22165	21513
Oil Age	hrs	600	600	564
Oil Changed	Client Info	Changed	Not Changd	Changed
Sample Status		SEVERE	SEVERE	ABNORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >3.0	<1.0	<1.0	0.9
Water	WC Method >0.2	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >75	21	16	▲ 110
Chromium	ppm ASTM D5185m >5	1	1	2
Nickel	ppm ASTM D5185m >4	0	0	1
Titanium	ppm ASTM D5185m >2	<1	0	<1
Silver	ppm ASTM D5185m >2	0	0	<1
Aluminum	ppm ASTM D5185m >15	5	4	▲ 25
Lead	ppm ASTM D5185m >25	0	0	7
Copper	ppm ASTM D5185m >100	4	4	▲ 203
Tin	ppm ASTM D5185m >4	<1	<1	▲ 10
Vanadium	ppm ASTM D5185m	0	<1	0
Cadmium	ppm ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	66	59	12
Barium	ppm ASTM D5185m 0	0	0	0
Molybdenum	ppm ASTM D5185m 60	139	130	110
Manganese	ppm ASTM D5185m 0	<1	<1	5
Magnesium	ppm ASTM D5185m 1010	604	576	838
Calcium	ppm ASTM D5185m 1070	732	661	1527
Phosphorus	ppm ASTM D5185m 1150	716	726	846
Zinc	ppm ASTM D5185m 1270	878	848	1059
Sulfur	ppm ASTM D5185m 2060	2173	2088	2660

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	▲ 41	▲ 37	▲ 26
Sodium	ppm ASTM D5185m	▲ 1682	▲ 1726	6
Potassium	ppm ASTM D5185m >20	▲ 314	▲ 288	71
Glycol	% *ASTM D2982	● 0.20	● 0.12	NEG

INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >6	0.5	0.5	0.1
Nitration	Abs/cm *ASTM D7624 >20	11.8	11.6	9.1
Sulfation	Abs/.1mm *ASTM D7415 >30	20.0	19.9	22.7


FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	13.1	13.0	15.5
Base Number (BN)	mg KOH/g ASTM D2896 9.8	12.1	11.9	5.1




OIL ANALYSIS REPORT


Glycol Contamination

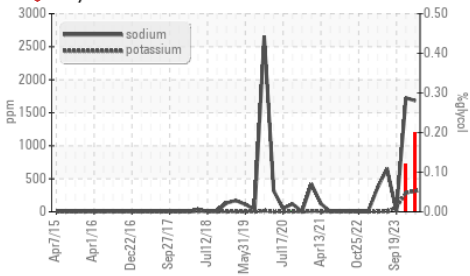


Silicon (ppm)

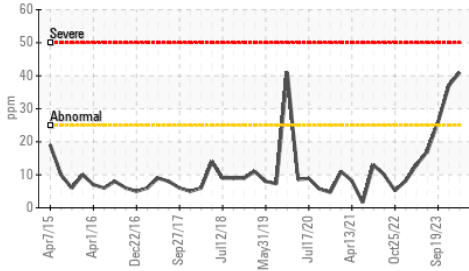

Viscosity @ 100°C

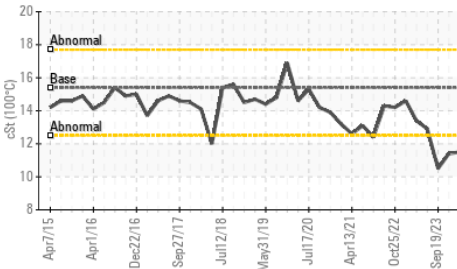

Base Number

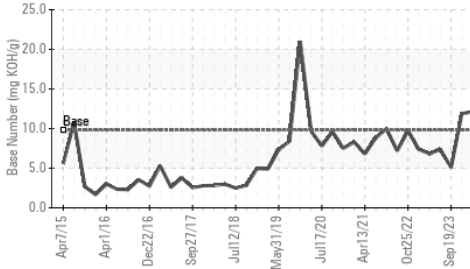

VISUAL


	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES


	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	▲ 11.5	▲ 11.4

GRAPHS


Ferrous Alloys

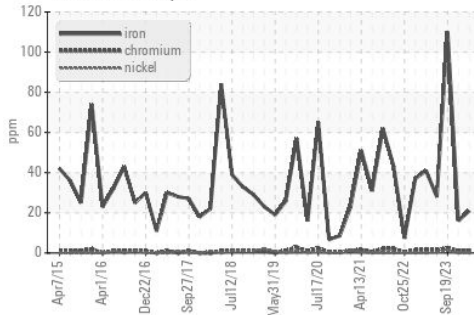


Non-ferrous Metals

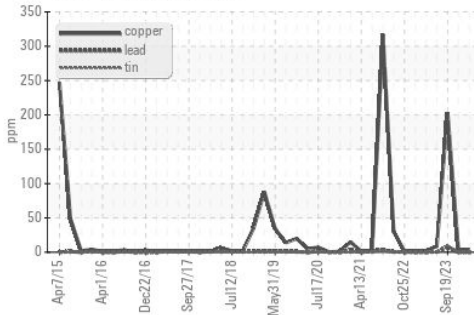

Viscosity @ 100°C

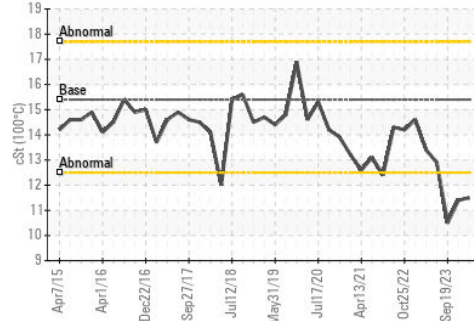

Base Number

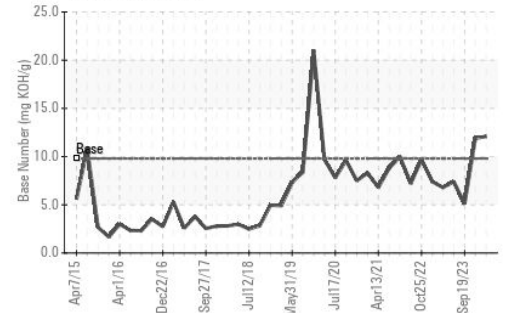

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : GFL0072053
 Lab Number : 06098925
 Unique Number : 10897155
 Test Package : FLEET

Received : 23 Feb 2024
 Tested : 26 Feb 2024
 Diagnosed : 26 Feb 2024 - Don Baldrige

GFL Environmental - 094 - Cedartown
 2097 Buchanan Highway
 Cedartown, GA
 US 30125

Contact: WILLIAM FOSTER
 william.foster@gflenv.com

T: (800)207-6618

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)