




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Area  
**(BD70667)**  
Machine Id  
**814029 MACK LR64R**  
Component  
**Diesel Engine**  
Fluid  
**TIER ONE 15W40 (--- GAL)**

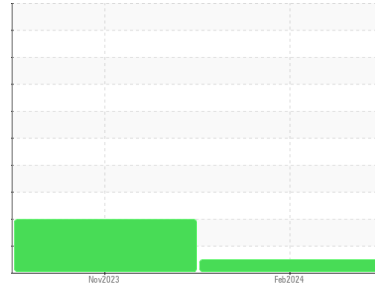

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

Metal levels are typical for a new component breaking in.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0102215</b>	GFL0102211	---
Sample Date	Client Info		<b>21 Feb 2024</b>	27 Nov 2023	---
Machine Age	hrs	Client Info	<b>772</b>	290	---
Oil Age	hrs	Client Info	<b>184</b>	290	---
Oil Changed	Client Info		<b>Not Chngd</b>	Not Chngd	---
Sample Status			<b>NORMAL</b>	ABNORMAL	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	0.4	---
Water	WC Method	>0.2	<b>NEG</b>	NEG	---
Glycol	WC Method		<b>NEG</b>	NEG	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >120	<b>12</b>	25	---
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	---
Nickel	ppm	ASTM D5185m >5	<b>4</b>	6	---
Titanium	ppm	ASTM D5185m >2	<b>&lt;1</b>	1	---
Silver	ppm	ASTM D5185m >2	<b>&lt;1</b>	<1	---
Aluminum	ppm	ASTM D5185m >20	<b>2</b>	5	---
Lead	ppm	ASTM D5185m >40	<b>&lt;1</b>	0	---
Copper	ppm	ASTM D5185m >330	<b>73</b>	37	---
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	2	---
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>38</b>	374	---
Barium	ppm	ASTM D5185m	<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m	<b>59</b>	118	---
Manganese	ppm	ASTM D5185m	<b>1</b>	3	---
Magnesium	ppm	ASTM D5185m	<b>889</b>	674	---
Calcium	ppm	ASTM D5185m	<b>1147</b>	1531	---
Phosphorus	ppm	ASTM D5185m	<b>892</b>	723	---
Zinc	ppm	ASTM D5185m	<b>1135</b>	830	---
Sulfur	ppm	ASTM D5185m	<b>2951</b>	2269	---

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>15</b>	▲ 99	---
Sodium	ppm	ASTM D5185m	<b>3</b>	3	---
Potassium	ppm	ASTM D5185m >20	<b>4</b>	1	---

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >4	<b>0.3</b>	0.2	---
Nitration	Abs/cm	*ASTM D7624 >20	<b>7.0</b>	7.3	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>20.2</b>	26.2	---

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>15.8</b>	20.9	---
Base Number (BN)	mg KOH/g	ASTM D2896	<b>8.4</b>	9.3	---







# OIL ANALYSIS REPORT

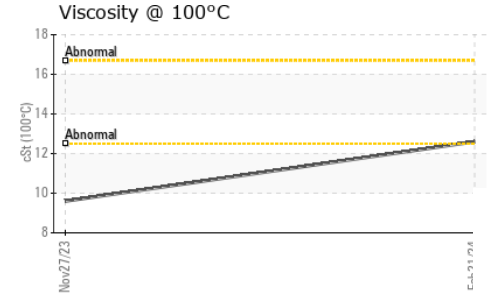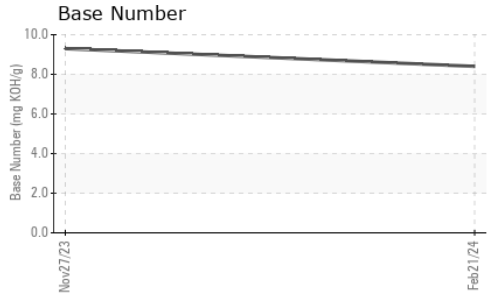

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.6	▲ 9.6	---

## GRAPHS

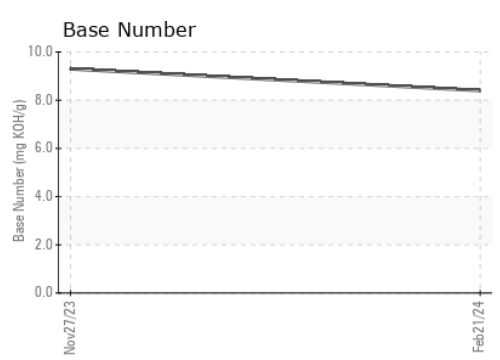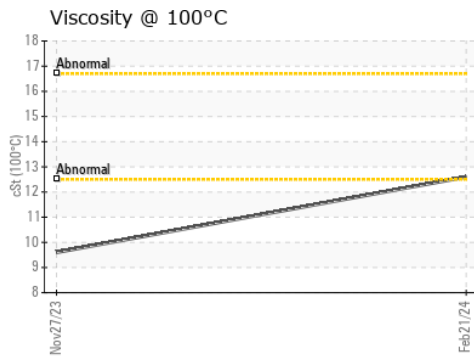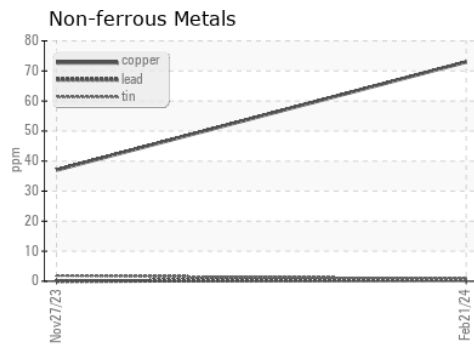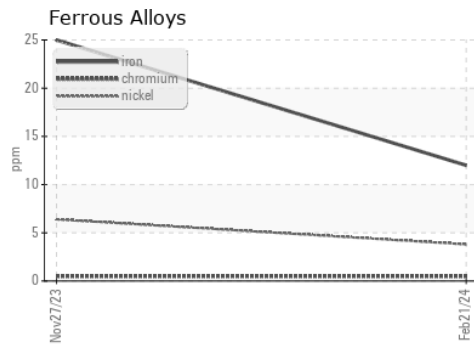

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0102215 **Received** : 23 Feb 2024  
**Lab Number** : 06098980 **Tested** : 26 Feb 2024  
**Unique Number** : 10897210 **Diagnosed** : 26 Feb 2024 - Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 642- Grand Rapids Hauling**  
 5826 Alden Nash Ave SE  
 Lowell, MI  
 US 49331  
 Contact: Chad Crosby  
 ccrosby@gflenv.com  
 T: (616)299-8425  
 F:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)