




# OIL ANALYSIS REPORT



Area  
**(BD70517) {UNASSIGNED}**  
Machine Id  
**814037 MACK LR64R**  
Component  
**Diesel Engine**  
Fluid  
**TIER ONE 15W40 (--- GAL)**

## Sample Rating Trend

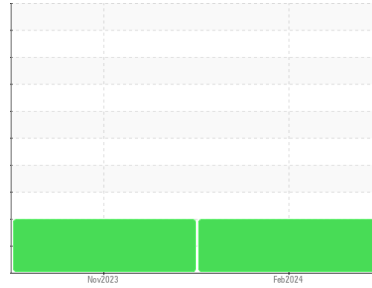

**DIRT**



## DIAGNOSIS

### ▲ Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

### Wear

Metal levels are typical for a new component breaking in.

### ▲ Contamination

Elemental level of silicon (Si) above normal indicating ingress of seal material.

### ▲ Fluid Condition

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0102220</b>	GFL0061436	---
Sample Date	Client Info	<b>21 Feb 2024</b>	14 Nov 2023	---
Machine Age	hrs	<b>914</b>	285	---
Oil Age	hrs	<b>334</b>	281	---
Oil Changed	Client Info	<b>Not Chngd</b>	Not Chngd	---
Sample Status		<b>ABNORMAL</b>	ABNORMAL	---

## CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.2	<b>NEG</b>	NEG	---
Glycol	WC Method	<b>NEG</b>	NEG	---

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >120	<b>19</b>	27	---
Chromium	ppm ASTM D5185m >20	<b>&lt;1</b>	<1	---
Nickel	ppm ASTM D5185m >5	<b>6</b>	9	---
Titanium	ppm ASTM D5185m >2	<b>&lt;1</b>	<1	---
Silver	ppm ASTM D5185m >2	<b>&lt;1</b>	<1	---
Aluminum	ppm ASTM D5185m >20	<b>4</b>	5	---
Lead	ppm ASTM D5185m >40	<b>&lt;1</b>	0	---
Copper	ppm ASTM D5185m >330	<b>70</b>	31	---
Tin	ppm ASTM D5185m >15	<b>1</b>	1	---
Vanadium	ppm ASTM D5185m	<b>&lt;1</b>	0	---
Cadmium	ppm ASTM D5185m	<b>0</b>	0	---

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m	<b>150</b>	344	---
Barium	ppm ASTM D5185m	<b>0</b>	1	---
Molybdenum	ppm ASTM D5185m	<b>81</b>	117	---
Manganese	ppm ASTM D5185m	<b>2</b>	3	---
Magnesium	ppm ASTM D5185m	<b>811</b>	636	---
Calcium	ppm ASTM D5185m	<b>1273</b>	1364	---
Phosphorus	ppm ASTM D5185m	<b>798</b>	651	---
Zinc	ppm ASTM D5185m	<b>994</b>	810	---
Sulfur	ppm ASTM D5185m	<b>2686</b>	2528	---

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>▲ 42</b>	<b>▲ 101</b>	---
Sodium	ppm ASTM D5185m	<b>3</b>	<1	---
Potassium	ppm ASTM D5185m >20	<b>5</b>	6	---
Fuel	% ASTM D3524 >3.0	<b>&lt;1.0</b>	0.4	---

## INFRA-RED




method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >4	<b>0.3</b>	0.2	---
Nitration	Abs/cm *ASTM D7624 >20	<b>7.3</b>	7.4	---
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>22.5</b>	25.6	---

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>18.0</b>	20.8	---
Base Number (BN)	mg KOH/g ASTM D2896	<b>8.7</b>	9.0	---







# OIL ANALYSIS REPORT

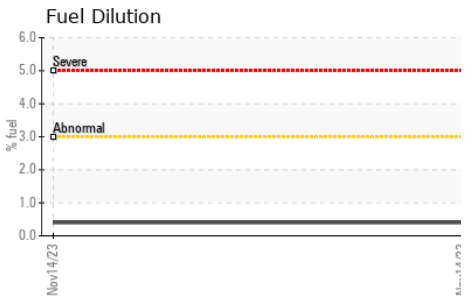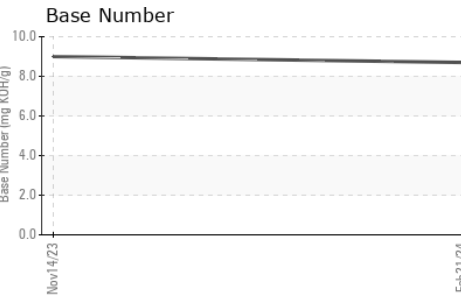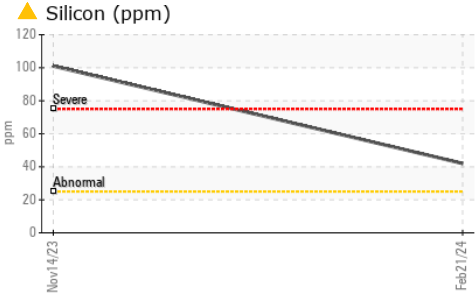

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	▲ 11.4	▲ 9.7	---

## GRAPHS

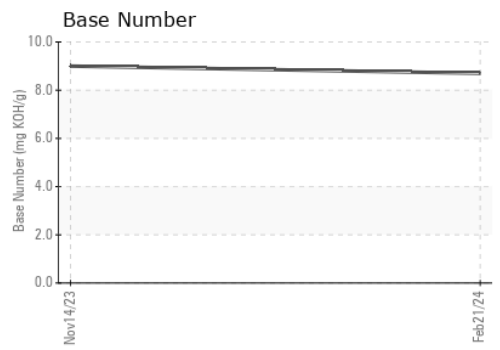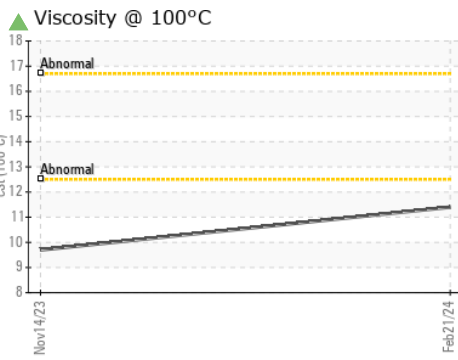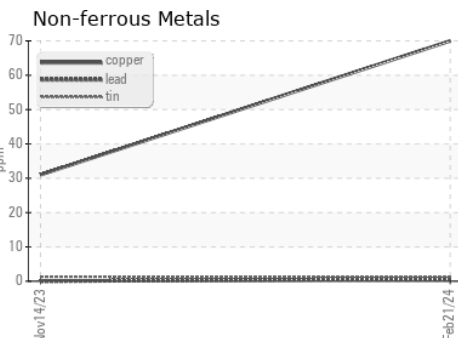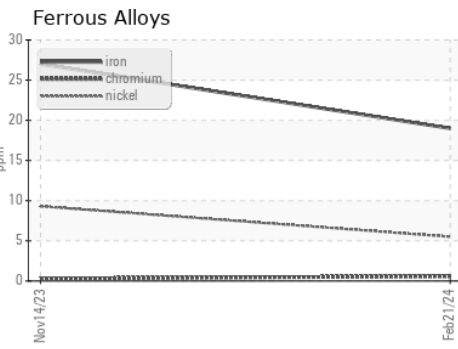

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0102220      **Received** : 23 Feb 2024  
**Lab Number** : 06098981      **Tested** : 26 Feb 2024  
**Unique Number** : 10897211      **Diagnosed** : 26 Feb 2024 - Don Baldrige  
**Test Package** : FLEET ( Additional Tests: FuelDilution )

**GFL Environmental - 642- Grand Rapids Hauling**  
 5826 Alden Nash Ave SE  
 Lowell, MI  
 US 49331  
 Contact: Chad Crosby  
 ccrosby@gflenv.com  
 T: (616)299-8425  
 F:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)