




# OIL ANALYSIS REPORT

Sample Rating Trend

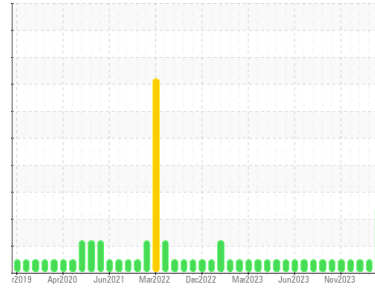

GLYCOL



Area  
**(D582HW)**

Machine Id  
**10681**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

We advise that you check for possible coolant leak. Check for low coolant level. We recommend an early resample to monitor this condition.

### Wear

All component wear rates are normal.

### Contamination

Sodium and/or potassium levels are high.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0098872</b>	GFL0098935	GFL0098955
Sample Date	Client Info	<b>19 Feb 2024</b>	31 Jan 2024	03 Jan 2024
Machine Age	hrs	<b>19082</b>	18948	18768
Oil Age	hrs	<b>18768</b>	18768	18144
Oil Changed	Client Info	<b>N/A</b>	N/A	Changed
Sample Status		<b>ABNORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >75	<b>45</b>	20	41
Chromium	ppm ASTM D5185m >5	<b>1</b>	<1	<1
Nickel	ppm ASTM D5185m >4	<b>&lt;1</b>	0	0
Titanium	ppm ASTM D5185m >2	<b>&lt;1</b>	0	0
Silver	ppm ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm ASTM D5185m >15	<b>3</b>	2	2
Lead	ppm ASTM D5185m >25	<b>&lt;1</b>	0	<1
Copper	ppm ASTM D5185m >100	<b>1</b>	1	<1
Tin	ppm ASTM D5185m >4	<b>0</b>	<1	0
Vanadium	ppm ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>&lt;1</b>	1	0
Barium	ppm ASTM D5185m 0	<b>0</b>	0	3
Molybdenum	ppm ASTM D5185m 60	<b>67</b>	58	66
Manganese	ppm ASTM D5185m 0	<b>&lt;1</b>	<1	0
Magnesium	ppm ASTM D5185m 1010	<b>994</b>	935	1062
Calcium	ppm ASTM D5185m 1070	<b>1392</b>	1216	1196
Phosphorus	ppm ASTM D5185m 1150	<b>1134</b>	1044	1100
Zinc	ppm ASTM D5185m 1270	<b>1362</b>	1275	1342
Sulfur	ppm ASTM D5185m 2060	<b>3198</b>	3185	3427

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>9</b>	7	9
Sodium	ppm ASTM D5185m	<b>▲ 94</b>	60	50
Potassium	ppm ASTM D5185m >20	<b>▲ 78</b>	48	39
Glycol	% *ASTM D2982	<b>NEG</b>	NEG	NEG

## INFRA-RED




method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >6	<b>0.9</b>	0.4	0.7
Nitration	Abs/cm *ASTM D7624 >20	<b>13.2</b>	8.8	12.5
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>24.6</b>	19.9	24.9

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>21.6</b>	16.2	23.3
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>7.0</b>	8.2	6.9







# OIL ANALYSIS REPORT

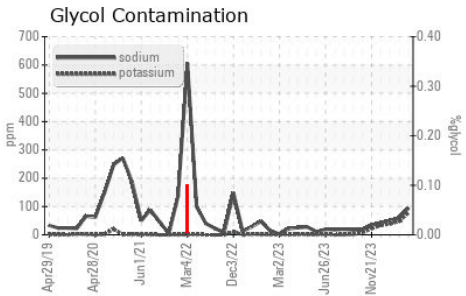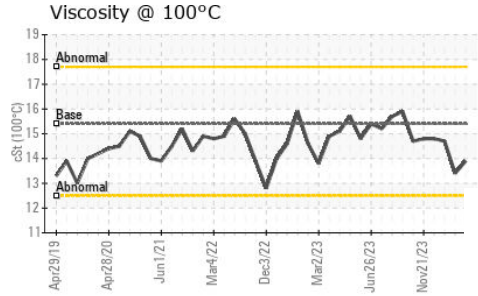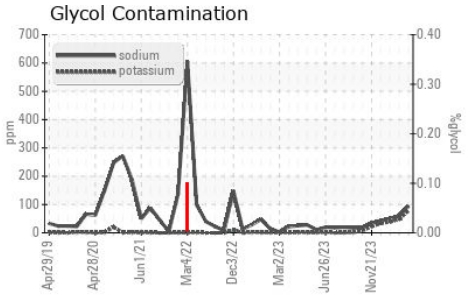

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.9</b>	13.4	14.7

## GRAPHS

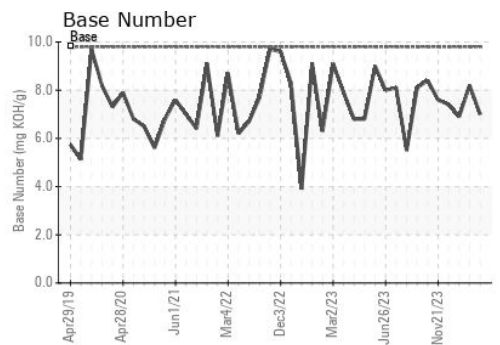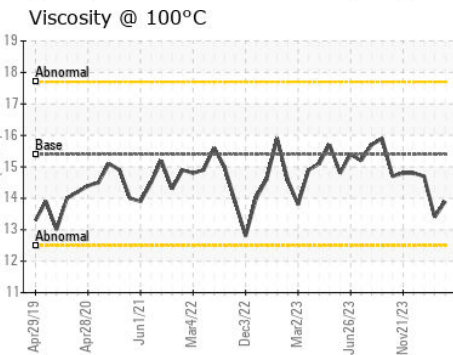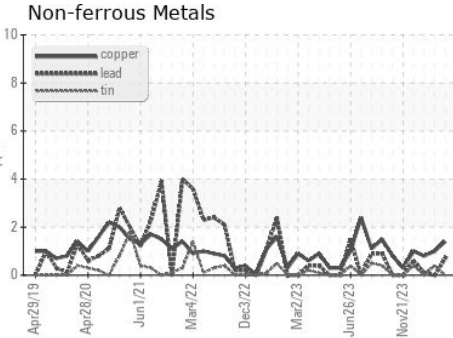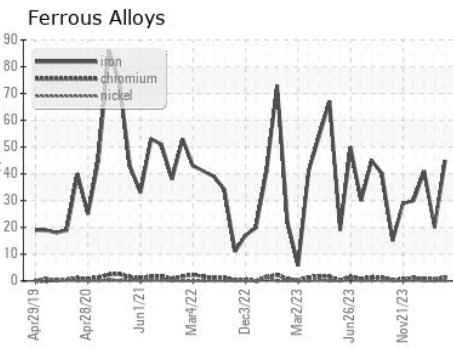

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0098872      **Received** : 23 Feb 2024  
**Lab Number** : 06099038      **Tested** : 28 Feb 2024  
**Unique Number** : 10897268      **Diagnosed** : 28 Feb 2024 - Jonathan Hester  
**Test Package** : FLEET ( Additional Tests: Glycol )

**GFL Environmental - 084 - Clarksville**  
 699 Jack Miller Boulevard  
 Clarksville, TN  
 US 37042  
**Contact: ROBERT THIBAUT**  
 robert.thibault@gflenv.com  
 T: (931)552-7276  
 F: (931)572-9674

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)