




OIL ANALYSIS REPORT

Sample Rating Trend

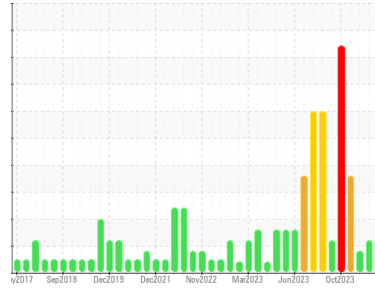

GLYCOL



Area
(DUX471)

Machine Id
10669

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (7 GAL)

DIAGNOSIS

Recommendation

We advise that you check for the source of the coolant leak. Check for low coolant level. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

Contamination

Sodium and/or potassium levels remain high.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0112381	GFL0107174	GFL0101186
Sample Date	Client Info	21 Feb 2024	30 Jan 2024	17 Nov 2023
Machine Age	hrs	50578	50438	50113
Oil Age	hrs	583	443	138
Oil Changed	Client Info	Changed	Not Changd	Not Changd
Sample Status		ABNORMAL	ABNORMAL	ABNORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >3.0	<1.0	<1.0	<1.0
Water	WC Method >0.2	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >75	44	37	35
Chromium	ppm ASTM D5185m >5	2	1	<1
Nickel	ppm ASTM D5185m >4	<1	0	0
Titanium	ppm ASTM D5185m >2	<1	<1	<1
Silver	ppm ASTM D5185m >2	0	0	0
Aluminum	ppm ASTM D5185m >15	5	4	▲ 20
Lead	ppm ASTM D5185m >25	<1	<1	0
Copper	ppm ASTM D5185m >100	46	36	1
Tin	ppm ASTM D5185m >4	0	<1	2
Vanadium	ppm ASTM D5185m	0	0	<1
Cadmium	ppm ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	11	10	11
Barium	ppm ASTM D5185m 0	0	0	0
Molybdenum	ppm ASTM D5185m 60	74	71	70
Manganese	ppm ASTM D5185m 0	<1	<1	<1
Magnesium	ppm ASTM D5185m 1010	841	836	954
Calcium	ppm ASTM D5185m 1070	1033	980	1253
Phosphorus	ppm ASTM D5185m 1150	890	943	1073
Zinc	ppm ASTM D5185m 1270	1079	1118	1330
Sulfur	ppm ASTM D5185m 2060	2510	2694	2941

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	14	13	6
Sodium	ppm ASTM D5185m	▲ 494	▲ 451	25
Potassium	ppm ASTM D5185m >20	11	10	8
Glycol	% *ASTM D2982	NEG	NEG	NEG

INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >6	1	1	0.7
Nitration	Abs/cm *ASTM D7624 >20	10.6	9.7	7.5
Sulfation	Abs/.1mm *ASTM D7415 >30	22.0	21.4	18.4


FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	17.1	16.1	12.8
Base Number (BN)	mg KOH/g ASTM D2896 9.8	7.5	7.8	9.7




OIL ANALYSIS REPORT


Glycol Contamination

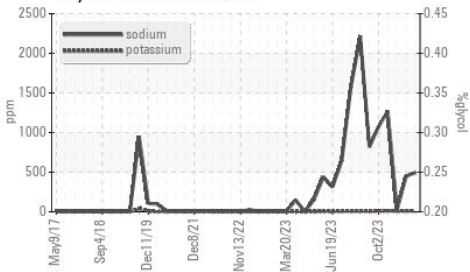

Viscosity @ 100°C

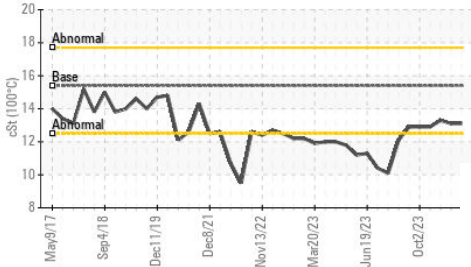

Glycol Contamination

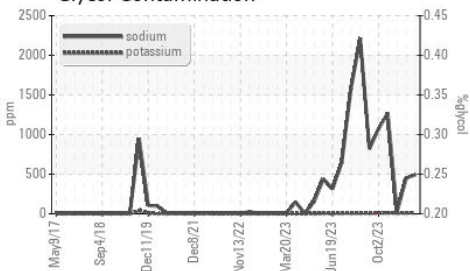


PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


PARAMETER	method	limit/base	current	history1	history2
FLUID PROPERTIES					
Visc @ 100°C	cSt	ASTM D445	15.4	13.1	13.3

GRAPHS


Ferrous Alloys

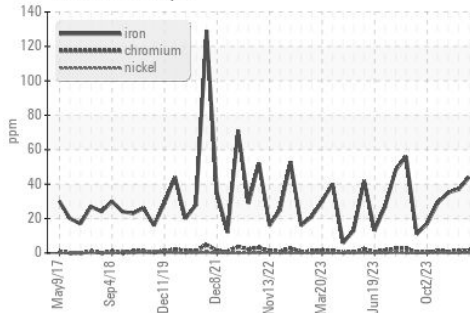


Non-ferrous Metals

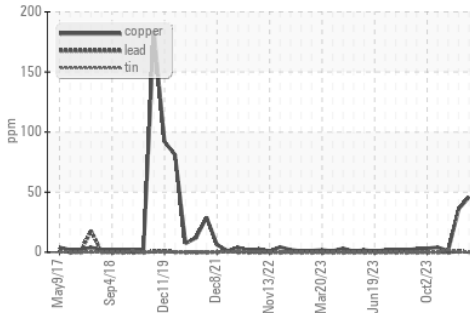

Viscosity @ 100°C

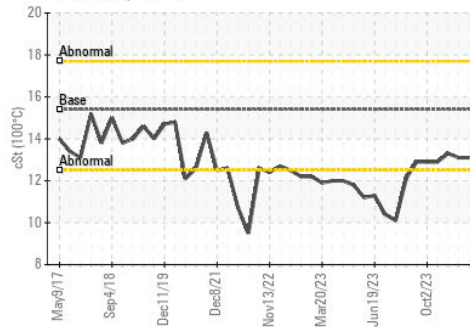

Base Number

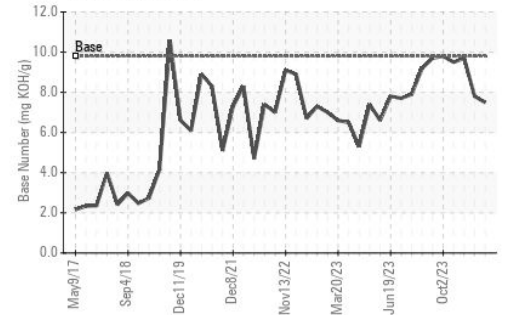

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : GFL0112381

Lab Number : 06099792

Unique Number : 10898022

Test Package : FLEET (Additional Tests: Glycol)

Received : 26 Feb 2024

Tested : 28 Feb 2024

Diagnosed : 28 Feb 2024 - Jonathan Hester

GFL Environmental - 010 - Stockbridge

1280 Rum Creek Parkway

Stockbridge, GA

US 30281

Contact: JOSHUA TINKER

joshuatinker@gflenv.com

T:

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)