




# OIL ANALYSIS REPORT

Sample Rating Trend

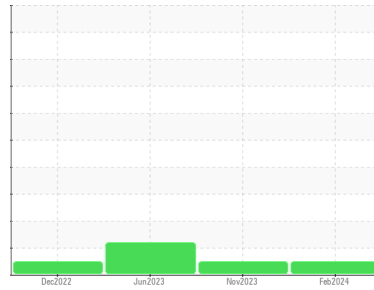

**NORMAL**



Machine Id

**4M**

Component

**Diesel Engine**

Fluid

**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

Metal levels are typical for a new component breaking in.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0101057</b>	GFL0092754	GFL0080805
Sample Date	Client Info		<b>21 Feb 2024</b>	17 Nov 2023	09 Jun 2023
Machine Age	hrs	Client Info	<b>600</b>	600	0
Oil Age	hrs	Client Info	<b>600</b>	0	0
Oil Changed	Client Info		<b>Not Changed</b>	N/A	Changed
Sample Status			<b>NORMAL</b>	NORMAL	ABNORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	0.5
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>31</b>	12	83
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	1	4
Nickel	ppm	ASTM D5185m >4	<b>0</b>	0	1
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	0	<1
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>4</b>	6	65
Lead	ppm	ASTM D5185m >40	<b>0</b>	0	2
Copper	ppm	ASTM D5185m >330	<b>2</b>	5	▲ 205
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	<1	8
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	<1
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>6</b>	<1	31
Barium	ppm	ASTM D5185m 0	<b>&lt;1</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>65</b>	64	51
Manganese	ppm	ASTM D5185m 0	<b>1</b>	<1	3
Magnesium	ppm	ASTM D5185m 1010	<b>878</b>	1043	632
Calcium	ppm	ASTM D5185m 1070	<b>1039</b>	1150	2108
Phosphorus	ppm	ASTM D5185m 1150	<b>942</b>	1074	801
Zinc	ppm	ASTM D5185m 1270	<b>1110</b>	1367	1065
Sulfur	ppm	ASTM D5185m 2060	<b>2631</b>	3205	2573

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>5</b>	4	9
Sodium	ppm	ASTM D5185m	<b>6</b>	2	6
Potassium	ppm	ASTM D5185m >20	<b>5</b>	5	164

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.5</b>	0.5	1.1
Nitration	Abs/cm	*ASTM D7624 >20	<b>9.3</b>	7.4	10.7
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>20.1</b>	19.1	22.2

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>17.1</b>	14.6	21.0
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>7.2</b>	8.4	9.7







# OIL ANALYSIS REPORT

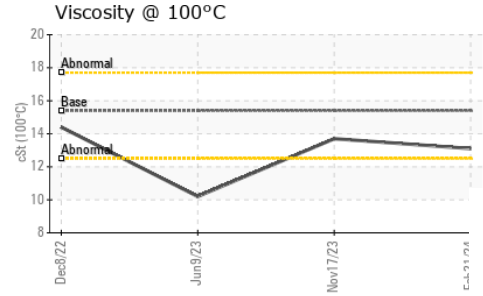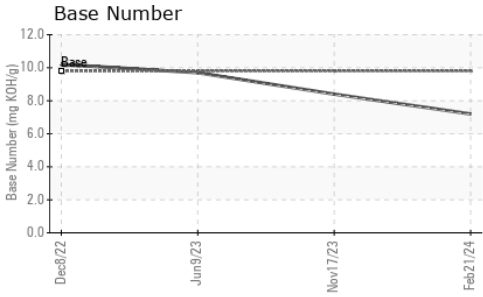

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.1</b>	13.7 ▲ 10.2

## GRAPHS

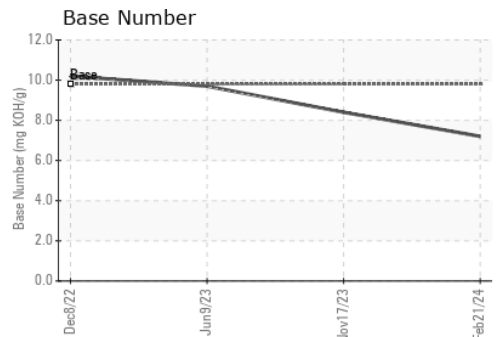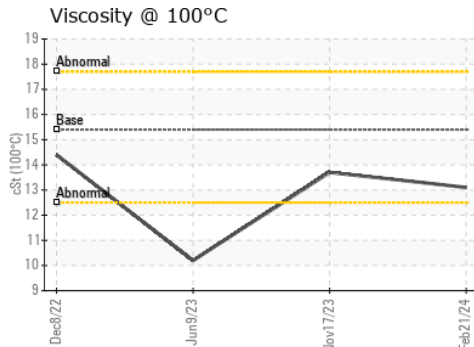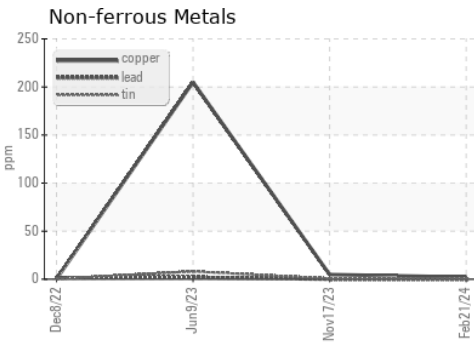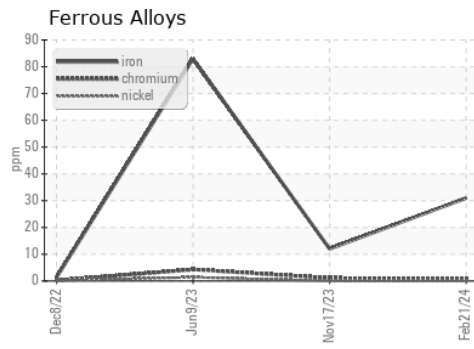

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0101057      **Received** : 26 Feb 2024  
**Lab Number** : 06099823      **Tested** : 27 Feb 2024  
**Unique Number** : 10898053      **Diagnosed** : 27 Feb 2024 - Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 455 - Flint**  
 2051 W. Bristol Rd  
 Flint Township, MI  
 US 48507  
 Contact: MARK WOMBLE  
 mwomble@gflenv.com  
 T: (586)825-9514  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)