




OIL ANALYSIS REPORT

Sample Rating Trend

VISCOSITY



Machine Id
933036
Component
Natural Gas Engine
Fluid
PETRO CANADA DURON SHP 15W40 (5 GAL)

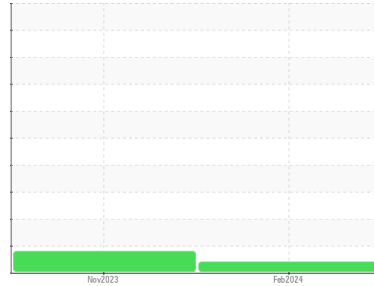

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0103420	GFL0074640	---
Sample Date	Client Info	21 Feb 2024	10 Nov 2023	---
Machine Age	hrs	Client Info	1143	1143
Oil Age	hrs	Client Info	762	1143
Oil Changed	Client Info	Not Chngd	Changed	---
Sample Status		MARGINAL	ABNORMAL	---

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method	>0.1	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>50	26	▲ 60
Chromium	ppm	ASTM D5185m	>5	2	2
Nickel	ppm	ASTM D5185m	>4	<1	2
Titanium	ppm	ASTM D5185m	>5	<1	0
Silver	ppm	ASTM D5185m	>3	0	<1
Aluminum	ppm	ASTM D5185m	>25	4	19
Lead	ppm	ASTM D5185m	>40	1	2
Copper	ppm	ASTM D5185m	>150	5	12
Tin	ppm	ASTM D5185m	>4	<1	2
Vanadium	ppm	ASTM D5185m		0	0
Cadmium	ppm	ASTM D5185m		0	0

ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	0	3	5
Barium	ppm	ASTM D5185m	0	<1	0
Molybdenum	ppm	ASTM D5185m	60	68	63
Manganese	ppm	ASTM D5185m	0	2	12
Magnesium	ppm	ASTM D5185m	1010	840	911
Calcium	ppm	ASTM D5185m	1070	1067	1042
Phosphorus	ppm	ASTM D5185m	1150	891	891
Zinc	ppm	ASTM D5185m	1270	1133	1181
Sulfur	ppm	ASTM D5185m	2060	2392	2425

CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>25	5	18
Sodium	ppm	ASTM D5185m		7	3
Potassium	ppm	ASTM D5185m	>20	8	52

INFRA-RED

method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844		0.1	0
Nitration	Abs/cm	*ASTM D7624	>20	10.7	10.5
Sulfation	Abs.1mm	*ASTM D7415	>30	20.0	22.9


FLUID DEGRADATION

method	limit/base	current	history1	history2	
Oxidation	Abs.1mm	*ASTM D7414	>25	15.1	19.4
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	5.0	3.9




OIL ANALYSIS REPORT

▲ Viscosity @ 100°C

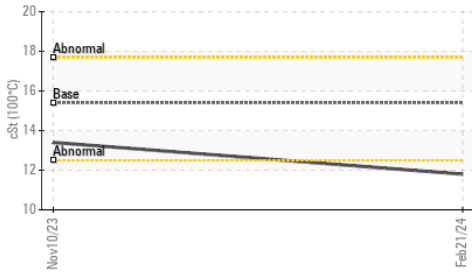





Base Number

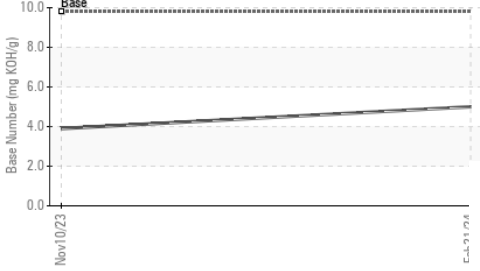

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	LIGHT	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4 ▲ 11.8	13.4	---

GRAPHS

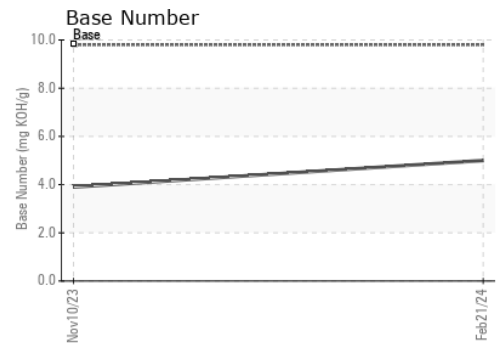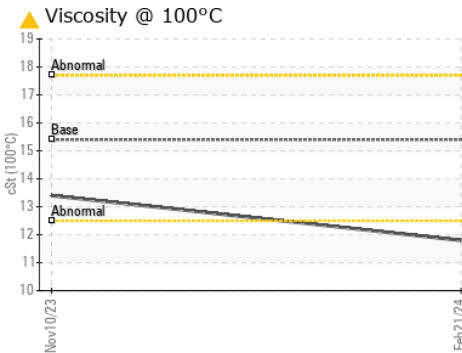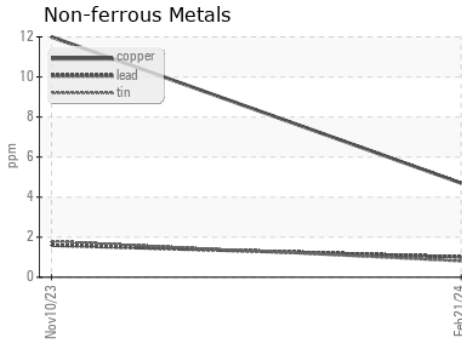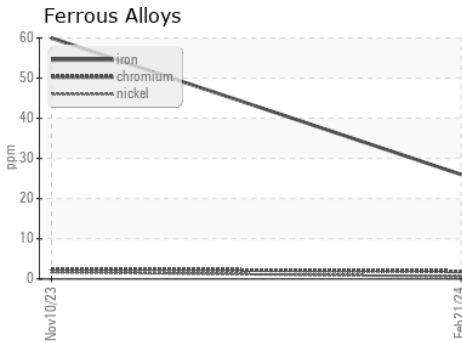

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0103420
Lab Number : 06099827
Unique Number : 10898057
Test Package : FLEET

Received : 26 Feb 2024
Tested : 27 Feb 2024
Diagnosed : 28 Feb 2024 - Jonathan Hester

GFL Environmental - 095 - Atlanta West
 2699 Cochran Industrial Blvd
 Douglasville, GA
 US 30127-1332
 Contact: Darrell Welch
 darrell.welch@gflenv.com
 T: (800)207-6618
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)