




OIL ANALYSIS REPORT

Sample Rating Trend

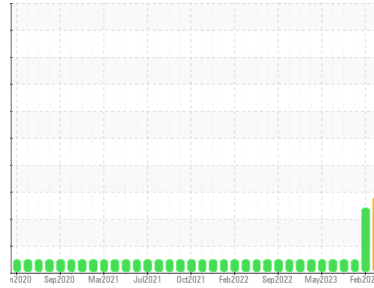

FUEL



Area
(YA154620)

Machine Id
12044

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (5 GAL)

DIAGNOSIS

▲ Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

▲ Contamination

Light fuel dilution occurring.

▲ Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. Fuel is present in the oil and is lowering the viscosity. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0079627	GFL0088507	GFL0098112
Sample Date	Client Info	22 Feb 2024	19 Feb 2024	10 Nov 2023
Machine Age	hrs	1643	1643	1643
Oil Age	hrs	590	590	408
Oil Changed	Client Info	N/A	Changed	N/A
Sample Status		ABNORMAL	ABNORMAL	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.2	NEG	NEG	NEG
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >75	31	24	17
Chromium	ppm ASTM D5185m >5	<1	0	<1
Nickel	ppm ASTM D5185m >4	0	<1	<1
Titanium	ppm ASTM D5185m >2	0	0	<1
Silver	ppm ASTM D5185m >2	0	0	<1
Aluminum	ppm ASTM D5185m >15	3	4	2
Lead	ppm ASTM D5185m >25	3	3	<1
Copper	ppm ASTM D5185m >100	10	7	1
Tin	ppm ASTM D5185m >4	0	<1	<1
Vanadium	ppm ASTM D5185m	0	0	<1
Cadmium	ppm ASTM D5185m	0	0	<1

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	24	22	4
Barium	ppm ASTM D5185m 0	8	0	<1
Molybdenum	ppm ASTM D5185m 60	37	36	62
Manganese	ppm ASTM D5185m 0	0	<1	<1
Magnesium	ppm ASTM D5185m 1010	▲ 545	▲ 611	923
Calcium	ppm ASTM D5185m 1070	▲ 653	▲ 698	1145
Phosphorus	ppm ASTM D5185m 1150	▲ 738	779	1019
Zinc	ppm ASTM D5185m 1270	▲ 743	▲ 830	1239
Sulfur	ppm ASTM D5185m 2060	2558	2500	2960

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	3	3	4
Sodium	ppm ASTM D5185m	0	1	0
Potassium	ppm ASTM D5185m >20	3	2	4
Fuel	% ASTM D3524 >3.0	▲ 2.2	▲ 1.3	<1.0

INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >6	0.2	0.2	0.7
Nitration	Abs/cm *ASTM D7624 >20	6.0	5.4	7.6
Sulfation	Abs/.1mm *ASTM D7415 >30	23.8	22.9	19.6


FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	24.9	23.3	14.7
Base Number (BN)	mg KOH/g ASTM D2896 9.8	4.9	6.2	8.6




OIL ANALYSIS REPORT


▲ Additives

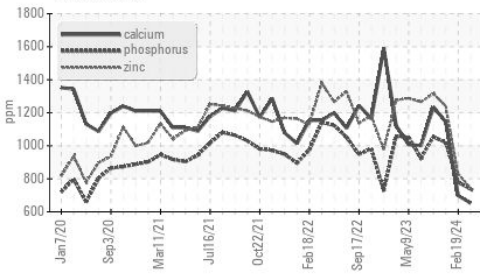


▲ Fuel Dilution

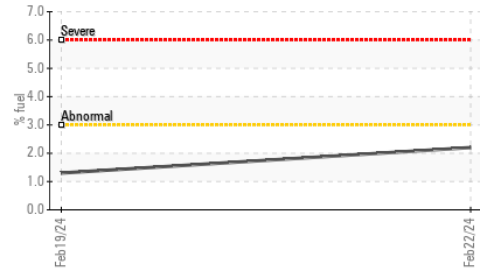

▲ Fuel Dilution

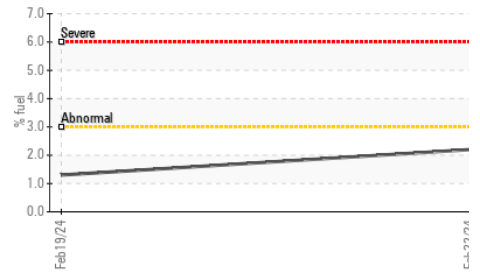

Base Number

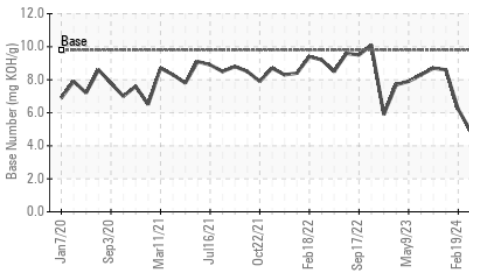


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	▲ 10.8	▲ 11.3

GRAPHS


Ferrous Alloys

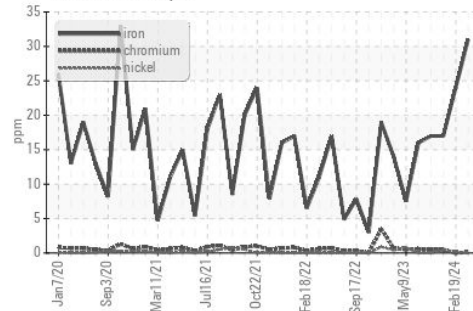


Non-ferrous Metals

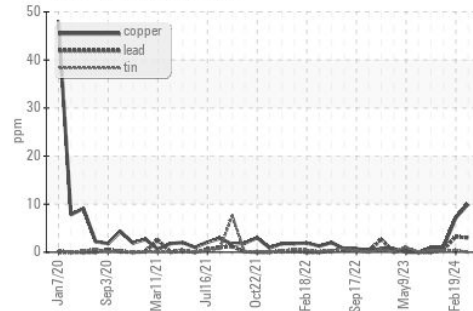

▲ Viscosity @ 100°C

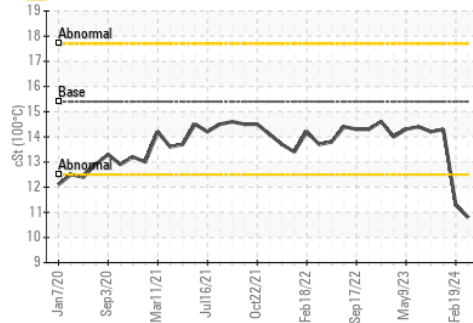

Base Number

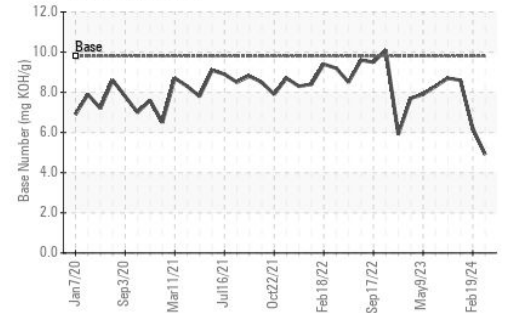

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : GFL0079627

Lab Number : 06100005

Unique Number : 10898235

Test Package : FLEET (Additional Tests: FuelDilution, PercentFuel)

Received : 26 Feb 2024

Tested : 28 Feb 2024

Diagnosed : 28 Feb 2024 - Wes Davis

GFL Environmental - 017 - Durham

148 Stone Park Court

Durham, NC

US 27703

Contact:

bill.waring@wearcheck.com

T: (919)596-1363

F: (919)598-1852

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)