



OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Machine Id
834030
Component
Natural Gas Engine
Fluid
{not provided} (--- GAL)



DIAGNOSIS

Recommendation
Resample at the next service interval to monitor. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear
Metal levels are typical for a components first oil change.

Contamination
There is no indication of any contamination in the oil.

Fluid Condition
The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0111850	---	---
Sample Date	Client Info		23 Feb 2024	---	---
Machine Age	hrs	Client Info	200	---	---
Oil Age	hrs	Client Info	200	---	---
Oil Changed	Client Info		Not Chngd	---	---
Sample Status			NORMAL	---	---

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	NEG	---	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >50	16	---	---
Chromium	ppm	ASTM D5185m >4	<1	---	---
Nickel	ppm	ASTM D5185m >2	0	---	---
Titanium	ppm	ASTM D5185m	0	---	---
Silver	ppm	ASTM D5185m >3	0	---	---
Aluminum	ppm	ASTM D5185m >9	2	---	---
Lead	ppm	ASTM D5185m >30	0	---	---
Copper	ppm	ASTM D5185m >35	3	---	---
Tin	ppm	ASTM D5185m >4	0	---	---
Vanadium	ppm	ASTM D5185m	0	---	---
Cadmium	ppm	ASTM D5185m	0	---	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	24	---	---
Barium	ppm	ASTM D5185m	8	---	---
Molybdenum	ppm	ASTM D5185m	47	---	---
Manganese	ppm	ASTM D5185m	<1	---	---
Magnesium	ppm	ASTM D5185m	654	---	---
Calcium	ppm	ASTM D5185m	1079	---	---
Phosphorus	ppm	ASTM D5185m	699	---	---
Zinc	ppm	ASTM D5185m	788	---	---
Sulfur	ppm	ASTM D5185m	2290	---	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >+100	11	---	---
Sodium	ppm	ASTM D5185m	1	---	---
Potassium	ppm	ASTM D5185m >20	20	---	---

INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	0	---	---
Nitration	Abs/cm	*ASTM D7624 >20	8.5	---	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	19.9	---	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	17.3	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	8.3	---	---







OIL ANALYSIS REPORT

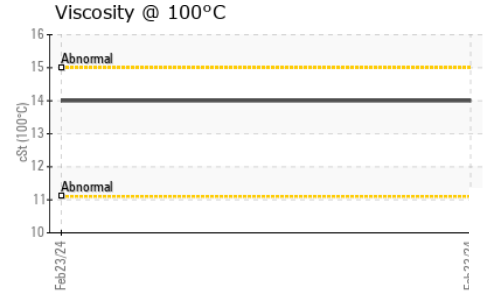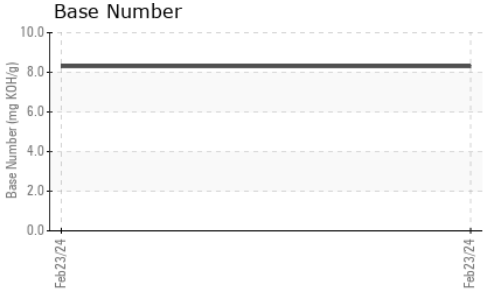

PARAMETER	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Precipitate	scalar	*Visual	NONE	NONE	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---
Free Water	scalar	*Visual		NEG	---	---

PARAMETER	method	limit/base	current	history1	history2
FLUID PROPERTIES					
Visc @ 100°C	cSt	ASTM D445	14.0	---	---

GRAPHS

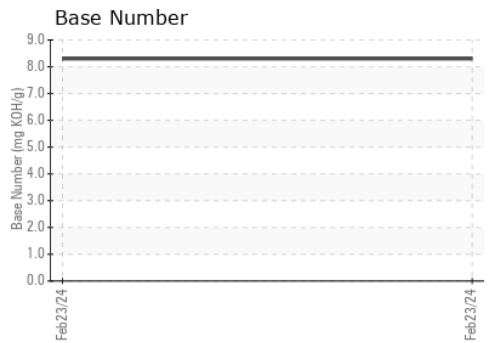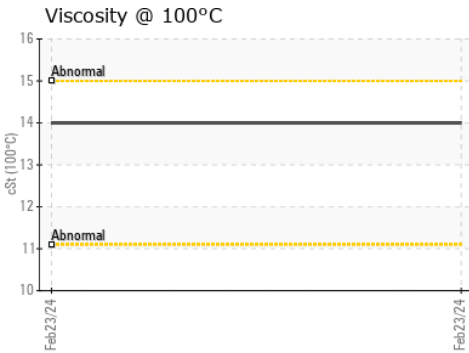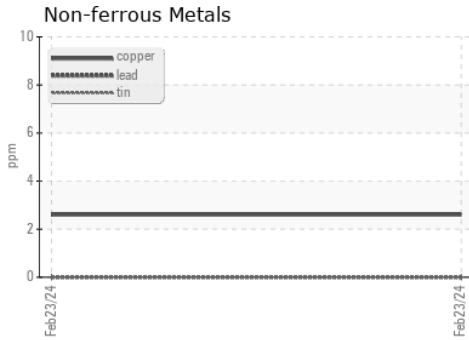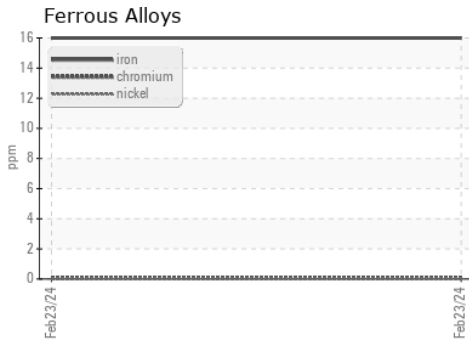

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : GFL0111850
 Lab Number : 06100008
 Unique Number : 10898238
 Test Package : FLEET

Received : 26 Feb 2024
 Tested : 27 Feb 2024
 Diagnosed : 27 Feb 2024 - Wes Davis

GFL Environmental - 652 - Fredericksburg Hauling
 10954 Houser Drive
 Fredericksburg, VA
 US 22408
 Contact: WILLIAM MILO
 wmilo@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: