



# OIL ANALYSIS REPORT

Sample Rating Trend


GLYCOL

Area  
**(YA156337)**

Machine Id  
**830012**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

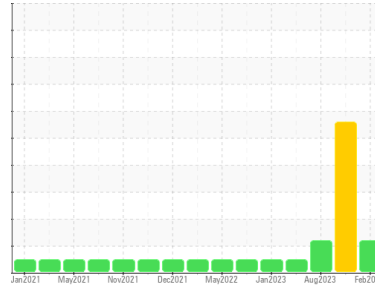

## DIAGNOSIS

### ▲ Recommendation

We advise that you check for the source of the coolant leak. Check for low coolant level. We recommend an early resample to monitor this condition.

### Wear

All component wear rates are normal.

### Contamination

Sodium and/or potassium levels are high.

### ▲ Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>GFL0111976</b>	GFL0098790	GFL0072383
Sample Date	Client Info			<b>21 Feb 2024</b>	04 Dec 2023	17 Aug 2023
Machine Age	hrs	Client Info		<b>4992</b>	4992	0
Oil Age	hrs	Client Info		<b>4992</b>	4992	252
Oil Changed	Client Info			<b>N/A</b>	N/A	Not Changd
Sample Status				<b>ABNORMAL</b>	ABNORMAL	ABNORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>3.0		<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2		<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>90	<b>24</b>	93	91
Chromium	ppm	ASTM D5185m	>20	<b>2</b>	6	3
Nickel	ppm	ASTM D5185m	>2	<b>2</b>	▲ 10	<1
Titanium	ppm	ASTM D5185m	>2	<b>0</b>	<1	<1
Silver	ppm	ASTM D5185m	>2	<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185m	>20	<b>2</b>	▲ 13	6
Lead	ppm	ASTM D5185m	>40	<b>0</b>	0	0
Copper	ppm	ASTM D5185m	>330	<b>35</b>	45	4
Tin	ppm	ASTM D5185m	>15	<b>0</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	<1
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	<b>22</b>	42	4
Barium	ppm	ASTM D5185m	0	<b>8</b>	0	0
Molybdenum	ppm	ASTM D5185m	60	<b>75</b>	163	76
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	3	1
Magnesium	ppm	ASTM D5185m	1010	<b>781</b>	865	1103
Calcium	ppm	ASTM D5185m	1070	<b>976</b>	1184	1416
Phosphorus	ppm	ASTM D5185m	1150	<b>920</b>	820	1201
Zinc	ppm	ASTM D5185m	1270	<b>1071</b>	1220	1475
Sulfur	ppm	ASTM D5185m	2060	<b>3013</b>	3288	3617




CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>17</b>	▲ 69	14
Sodium	ppm	ASTM D5185m		▲ <b>938</b>	▲ 3264	▲ 227
Potassium	ppm	ASTM D5185m	>20	<b>5</b>	▲ 25	0
Glycol	%	*ASTM D2982		<b>NEG</b>	NEG	NEG

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>6	<b>0.3</b>	1.1	1.5
Nitration	Abs/cm	*ASTM D7624	>20	<b>8.8</b>	15.8	14.4
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>19.2</b>	26.9	28.0

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>13.7</b>	18.1	24.7
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	<b>9.9</b>	13.7	6.0







# OIL ANALYSIS REPORT

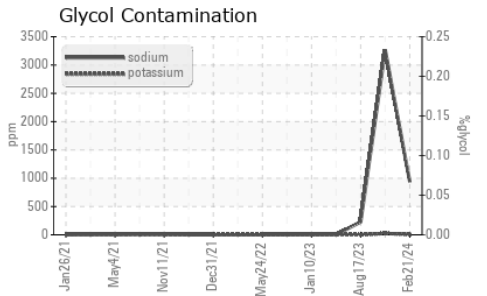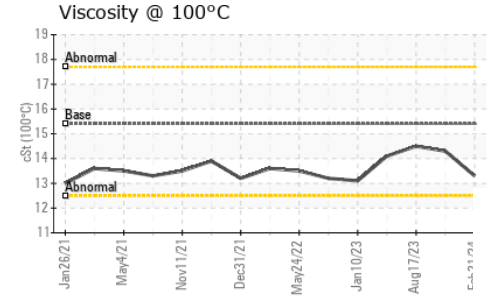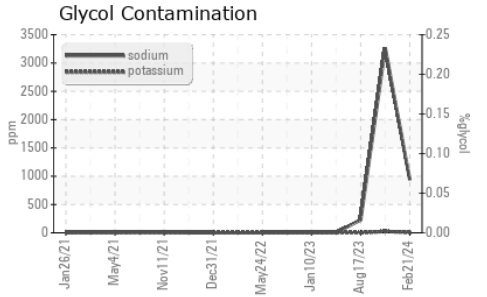

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	13.3	14.3

## GRAPHS

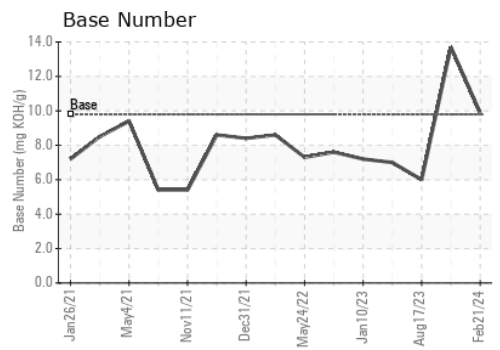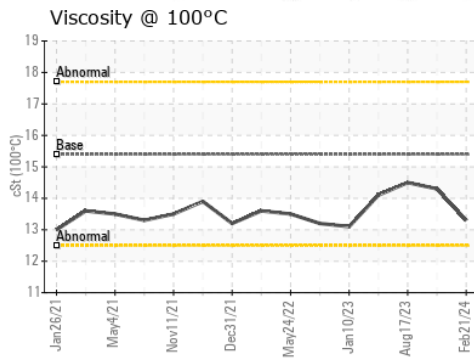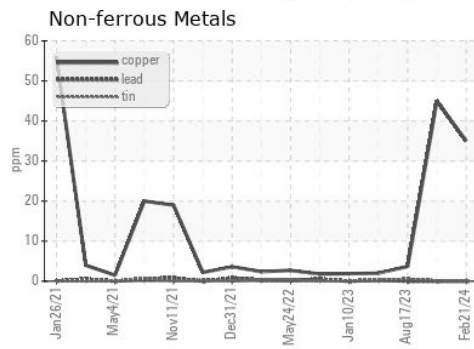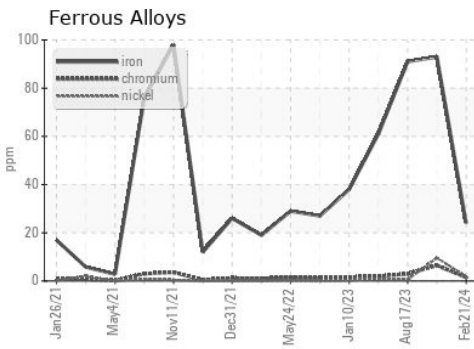

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0111976 **Received** : 26 Feb 2024  
**Lab Number** : 06100014 **Tested** : 28 Feb 2024  
**Unique Number** : 10898244 **Diagnosed** : 28 Feb 2024 - Jonathan Hester  
**Test Package** : FLEET ( Additional Tests: Glycol )

**GFL Environmental - 19DR - Deep Run/TriEast**  
 2287 Leslie R Stroud Road  
 Kinston, NC  
 US 28504-9477  
 Contact: Spencer Ligon  
 spencer.ligon@gflenv.com  
 T: (800)207-6618  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)