


# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

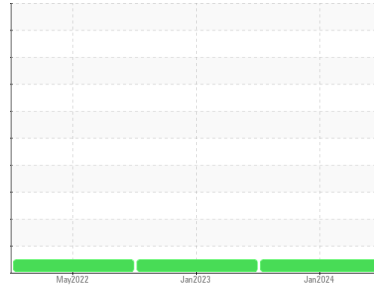

Area  
**(92454X) Walgreens - Tractor**  
Machine Id  
**[Walgreens - Tractor] 136A62027**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 10W30 (11 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PCA0116449</b>	PCA0087931	PCA0075505
Sample Date	Client Info			<b>13 Jan 2024</b>	03 Jan 2023	24 May 2022
Machine Age	mls	Client Info		<b>530823</b>	485863	433988
Oil Age	mls	Client Info		<b>44960</b>	51875	38752
Oil Changed	Client Info			<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2		<b>NEG</b>	NEG	NEG
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>80	<b>30</b>	55	20
Chromium	ppm	ASTM D5185m	>5	<b>3</b>	3	2
Nickel	ppm	ASTM D5185m	>2	<b>0</b>	<1	<1
Titanium	ppm	ASTM D5185m		<b>0</b>	0	0
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	1
Aluminum	ppm	ASTM D5185m	>30	<b>18</b>	22	13
Lead	ppm	ASTM D5185m	>30	<b>1</b>	<1	<1
Copper	ppm	ASTM D5185m	>150	<b>9</b>	5	7
Tin	ppm	ASTM D5185m	>5	<b>0</b>	<1	1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0



ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	<b>0</b>	4	8
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	50	<b>66</b>	65	66
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	950	<b>1028</b>	930	829
Calcium	ppm	ASTM D5185m	1050	<b>1196</b>	1266	1212
Phosphorus	ppm	ASTM D5185m	995	<b>1076</b>	1035	936
Zinc	ppm	ASTM D5185m	1180	<b>1348</b>	1308	1230
Sulfur	ppm	ASTM D5185m	2600	<b>2680</b>	3249	2667

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	<b>6</b>	6	6
Sodium	ppm	ASTM D5185m		<b>3</b>	1	2
Potassium	ppm	ASTM D5185m	>20	<b>6</b>	2	<1

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>1.1</b>	1.4	1
Nitration	Abs/cm	*ASTM D7624	>20	<b>10.0</b>	10.5	9.9
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>22.4</b>	22.7	23.0

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>18.3</b>	17.4	18.3
Base Number (BN)	mg KOH/g	ASTM D2896		<b>6.2</b>	7.5	6.3





# OIL ANALYSIS REPORT

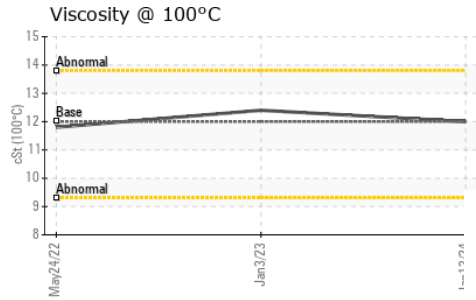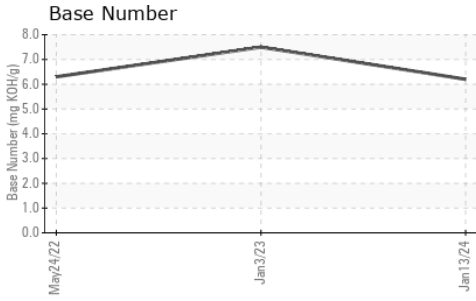

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	NONE
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG
Free Water	scalar	*Visual		<b>NEG</b>	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	<b>12.0</b>	12.4

## GRAPHS

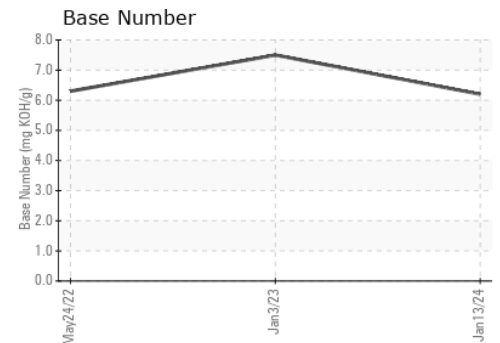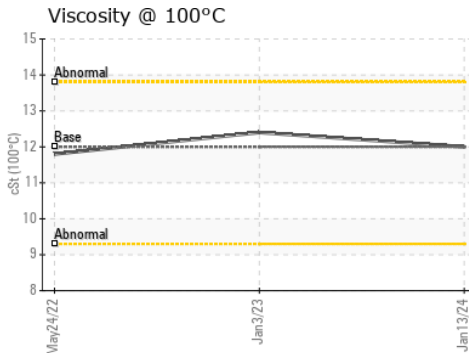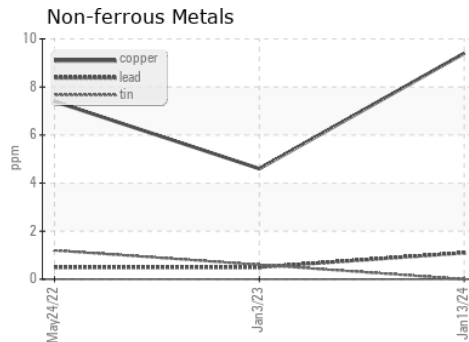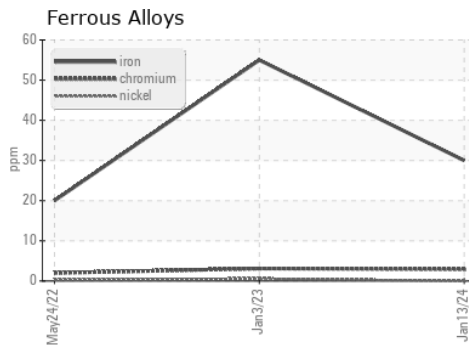

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0116449  
**Lab Number** : **06100690**  
**Unique Number** : 10898920  
**Test Package** : FLEET

**Received** : 26 Feb 2024  
**Tested** : 27 Feb 2024  
**Diagnosed** : 27 Feb 2024 - Wes Davis

**Transervice - Shop 1373 - Berkeley-Anderson/Pendergrass**  
 101 Alliance Parkway  
 Willamston, SC  
 US 29697

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact: Sonny Boucher  
 sboucher@transervice.com

T: (864)226-2304

F: (864)226-2329