


PROBLEM SUMMARY

Sample Rating Trend





FUEL

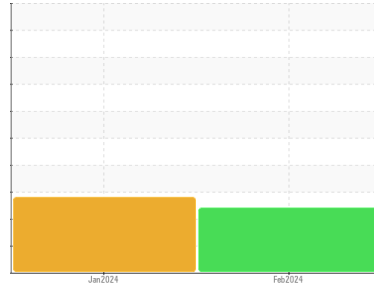

Machine Id
20
Component
Diesel Engine
Fluid
PETRO CANADA DURON UHP 5W40 (--- GAL)

COMPONENT CONDITION SUMMARY

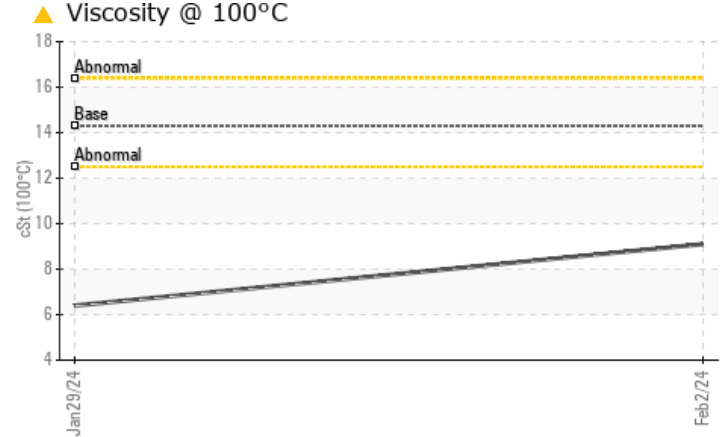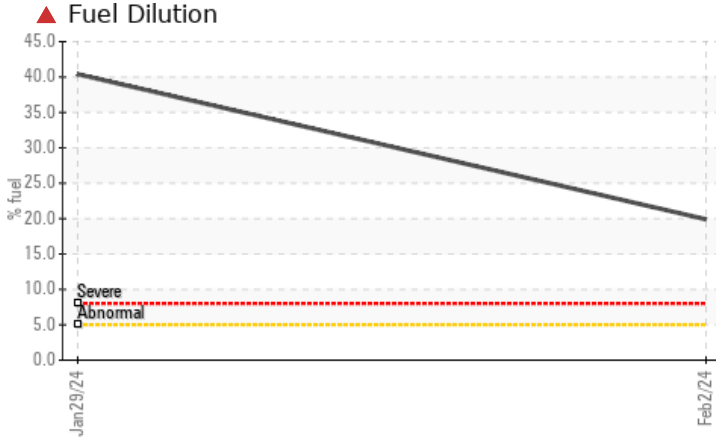

RECOMMENDATION

We advise that you check the fuel injection system. The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

PROBLEMATIC TEST RESULTS

Sample Status				SEVERE	SEVERE	---
Fuel	%	ASTM D3524	>5	▲ 19.9	▲ 40.4	---
Visc @ 100°C	cSt	ASTM D445	14.3	▲ 9.1	▲ 6.4	---

Customer Id: PETFAI
Sample No.: PCA0099443
Lab Number: 06100755
Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:
Jonathan Hester +1 919-379-4092 x4092
jhester@wearcheckusa.com

To change component or sample information:
Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Resample	---	---	?	We recommend an early resample to monitor this condition.
Check Fuel/injector System	---	---	?	We advise that you check the fuel injection system.

HISTORICAL DIAGNOSIS

29 Jan 2024 Diag: Don Baldrige

FUEL




We advise that you check the fuel injection system. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition. All component wear rates are normal. No visible metal detected. There is a severe level of fuel present in the oil. Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

view report



OIL ANALYSIS REPORT

Sample Rating Trend

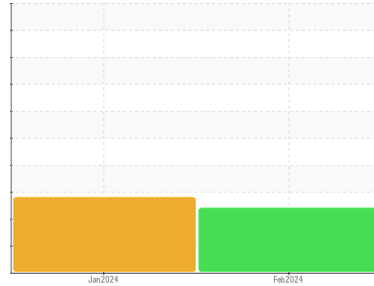

FUEL



Machine Id
20
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON UHP 5W40 (--- GAL)

DIAGNOSIS

▲ Recommendation

We advise that you check the fuel injection system. The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

▲ Contamination

There is a high amount of fuel present in the oil.

▲ Fluid Condition

Fuel is present in the oil and is lowering the viscosity. The BN result indicates that there is suitable alkalinity remaining in the oil.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	PCA0099443	PCA0099458	---
Sample Date	Client Info	02 Feb 2024	29 Jan 2024	---
Machine Age	mls	583889	575293	---
Oil Age	mls	0	0	---
Oil Changed	Client Info	Changed	Changed	---
Sample Status		SEVERE	SEVERE	---

CONTAMINATION

method	limit/base	current	history1	history2	
Water	WC Method	>0.2	NEG	NEG	---
Glycol	WC Method		NEG	NEG	---

WEAR METALS

method	limit/base	current	history1	history2		
Iron	ppm	ASTM D5185m	>100	61	65	---
Chromium	ppm	ASTM D5185m	>20	1	1	---
Nickel	ppm	ASTM D5185m	>4	<1	<1	---
Titanium	ppm	ASTM D5185m		0	<1	---
Silver	ppm	ASTM D5185m	>3	0	0	---
Aluminum	ppm	ASTM D5185m	>20	2	1	---
Lead	ppm	ASTM D5185m	>40	6	10	---
Copper	ppm	ASTM D5185m	>330	13	24	---
Tin	ppm	ASTM D5185m	>15	<1	1	---
Vanadium	ppm	ASTM D5185m		<1	0	---
Cadmium	ppm	ASTM D5185m		0	0	---

ADDITIVES

method	limit/base	current	history1	history2		
Boron	ppm	ASTM D5185m	65	43	25	---
Barium	ppm	ASTM D5185m	0	0	0	---
Molybdenum	ppm	ASTM D5185m	65	37	5	---
Manganese	ppm	ASTM D5185m	0	<1	<1	---
Magnesium	ppm	ASTM D5185m	1160	838	424	---
Calcium	ppm	ASTM D5185m	820	855	820	---
Phosphorus	ppm	ASTM D5185m	1160	793	416	---
Zinc	ppm	ASTM D5185m	1260	990	493	---
Sulfur	ppm	ASTM D5185m	3000	2490	1601	---

CONTAMINANTS

method	limit/base	current	history1	history2		
Silicon	ppm	ASTM D5185m	>25	7	9	---
Sodium	ppm	ASTM D5185m		8	7	---
Potassium	ppm	ASTM D5185m	>20	2	<1	---
Fuel	%	ASTM D3524	>5	▲ 19.9	▲ 40.4	---




INFRA-RED

method	limit/base	current	history1	history2		
Soot %	%	*ASTM D7844	>3	0.5	0.6	---
Nitration	Abs/cm	*ASTM D7624	>20	9.3	8.3	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	20.4	18.1	---

FLUID DEGRADATION

method	limit/base	current	history1	history2		
Oxidation	Abs/.1mm	*ASTM D7414	>25	18.4	13.0	---
Base Number (BN)	mg KOH/g	ASTM D2896	11.0	6.6	5.8	---





OIL ANALYSIS REPORT

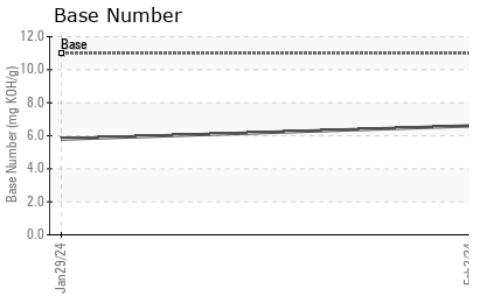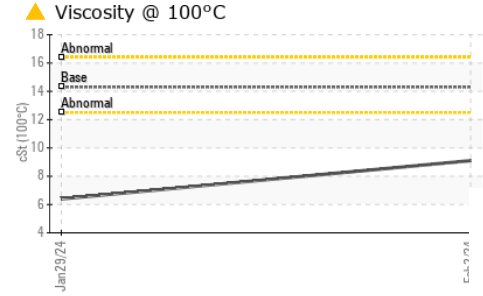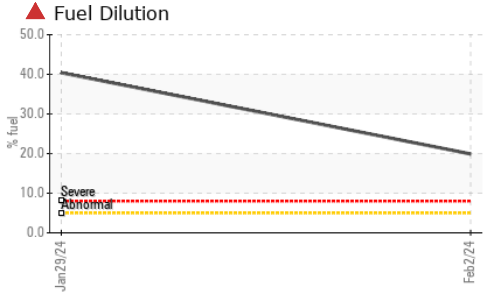

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.3	▲ 9.1	▲ 6.4	---

GRAPHS

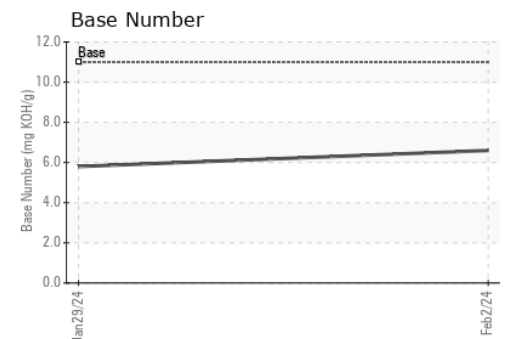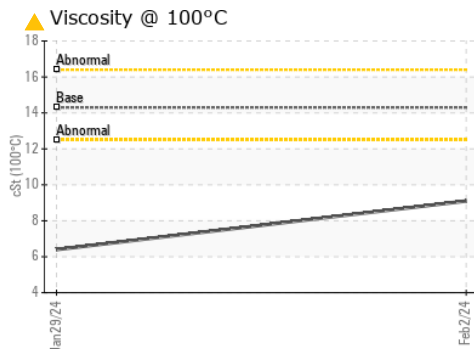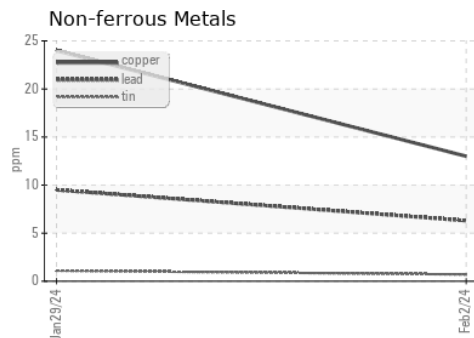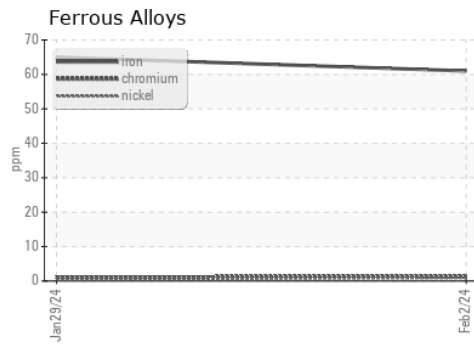

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0099443 **Received** : 26 Feb 2024
Lab Number : **06100755** **Tested** : 29 Feb 2024
Unique Number : 10898985 **Diagnosed** : 29 Feb 2024 - Jonathan Hester
Test Package : FLEET (Additional Tests: PercentFuel)

PETROSTAR INC - FAIRBANKS
 418 ILLINOIS
 FAIRBANKS, AK
 US 99701
 Contact: PHIL SWAFFORD
 pswafford@petrostar.com
 T: (907)452-0671
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)