


# OIL ANALYSIS REPORT

Sample Rating Trend



**NORMAL**

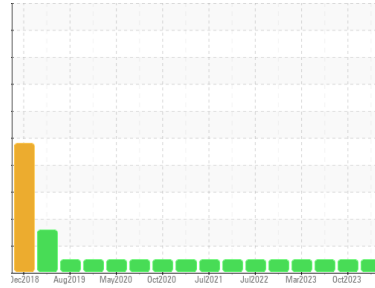

Area  
**KEMP QUARRIES / BCS - GRAVETTE [67745]**  
 Machine Id  
**WL124**  
 Component  
**Front Differential**  
 Fluid  
**PETRO CANADA PRODURO TO-4 SAE 50 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. ( Customer Sample Comment: Pm3 )

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0069786</b>	PCA0086996	PCA0084630
Sample Date	Client Info		<b>08 Feb 2024</b>	12 Oct 2023	06 Jul 2023
Machine Age	hrs	Client Info	<b>37365</b>	37365	36752
Oil Age	hrs	Client Info	<b>36319</b>	37365	36752
Oil Changed	Client Info		<b>N/A</b>	N/A	N/A
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>.2	<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >500	<b>23</b>	33	35
Chromium	ppm	ASTM D5185m >10	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m >10	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185m	<b>0</b>	<1	0
Silver	ppm	ASTM D5185m	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >25	<b>1</b>	2	2
Lead	ppm	ASTM D5185m >25	<b>0</b>	<1	0
Copper	ppm	ASTM D5185m >100	<b>11</b>	15	7
Tin	ppm	ASTM D5185m >10	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	<1	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 2	<b>0</b>	2	2
Barium	ppm	ASTM D5185m 0	<b>0</b>	9	0
Molybdenum	ppm	ASTM D5185m 0	<b>0</b>	2	1
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	0	<1
Magnesium	ppm	ASTM D5185m 9	<b>18</b>	18	20
Calcium	ppm	ASTM D5185m 3114	<b>2548</b>	3045	3168
Phosphorus	ppm	ASTM D5185m 1099	<b>932</b>	1058	1062
Zinc	ppm	ASTM D5185m 1245	<b>1190</b>	1232	1319
Sulfur	ppm	ASTM D5185m 7086	<b>5107</b>	5838	7203


## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >75	<b>9</b>	12	11
Sodium	ppm	ASTM D5185m	<b>0</b>	0	2
Potassium	ppm	ASTM D5185m >20	<b>0</b>	2	2

## VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual >.2	<b>NEG</b>	NEG	NEG
Free Water	scalar	*Visual	<b>NEG</b>	NEG	NEG

# OIL ANALYSIS REPORT








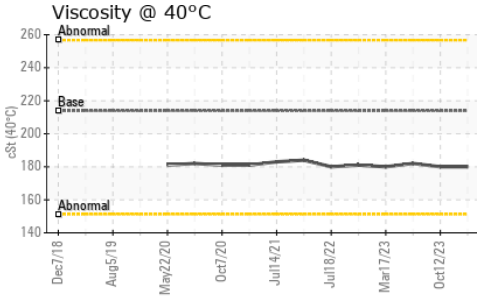


FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	213.9	<b>180</b>	180	182

SAMPLE IMAGES		method	limit/base	current	history1	history2
---------------	--	--------	------------	---------	----------	----------

Color				no image	no image	no image
Bottom				no image	no image	no image

## GRAPHS

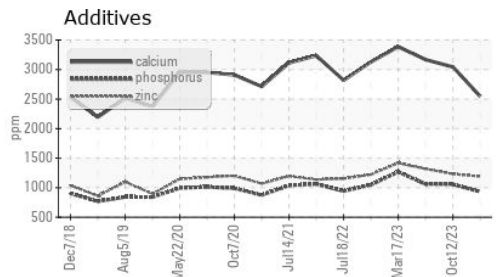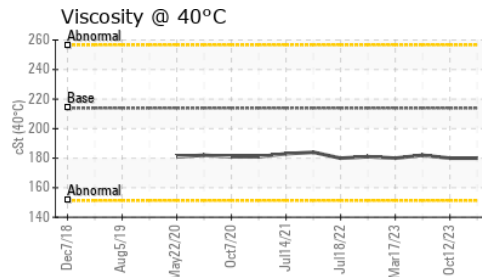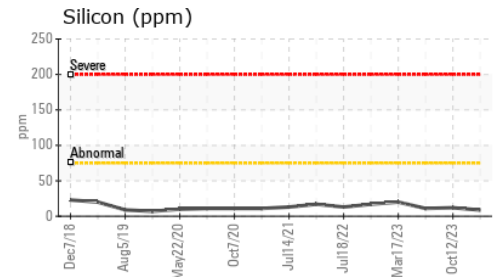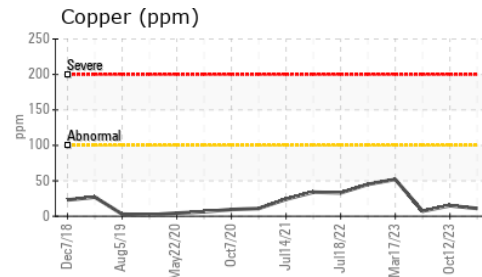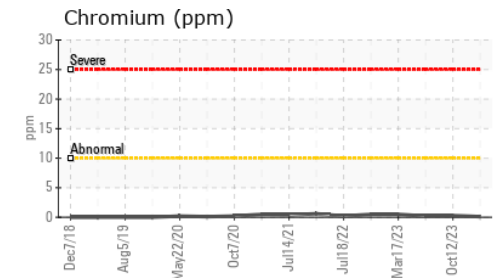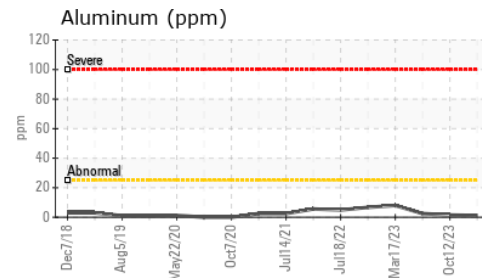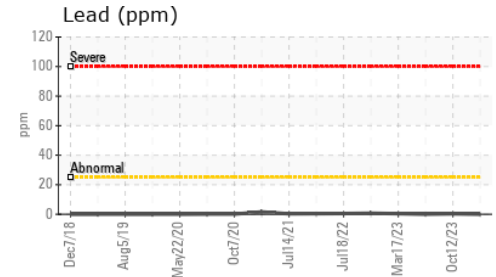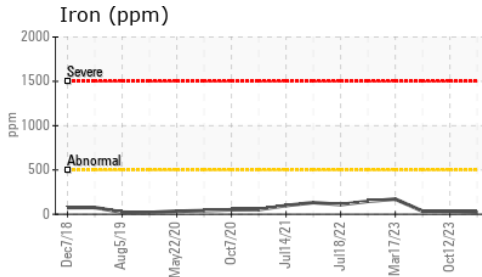

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0069786  
**Lab Number** : **06101203**  
**Unique Number** : 10899433  
**Test Package** : MOB 1

**Received** : 26 Feb 2024  
**Tested** : 28 Feb 2024  
**Diagnosed** : 28 Feb 2024 - Sean Felton

**Kemp Quarries - Benton County Stone - Gravette**  
 15100 N Hwy 59  
 Sulphur Springs, AR  
 US 72768

Contact: gravette@bentoncountystone.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: