



# OIL ANALYSIS REPORT

Sample Rating Trend


**NORMAL**



Machine Id  
**426059-402309**

Component  
**Transmission (Auto)**

Fluid  
**PETRO CANADA DuraDrive HD Synthetic 668 (--- GAL)**

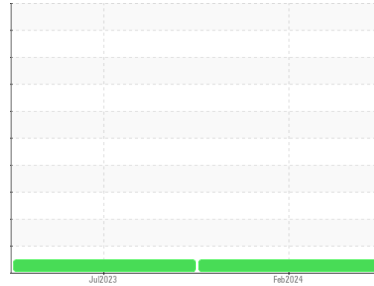

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the fluid.

### Fluid Condition

The condition of the fluid is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0108074</b>	GFL0087156	---
Sample Date	Client Info		<b>19 Feb 2024</b>	18 Jul 2023	---
Machine Age	hrs	Client Info	<b>3427</b>	3341	---
Oil Age	hrs	Client Info	<b>3427</b>	3341	---
Oil Changed	Client Info		<b>Changed</b>	Not Changd	---
Sample Status			<b>NORMAL</b>	NORMAL	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	<b>NEG</b>	NEG	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >160	<b>50</b>	59	---
Chromium	ppm	ASTM D5185m >5	<b>&lt;1</b>	0	---
Nickel	ppm	ASTM D5185m >5	<b>0</b>	0	---
Titanium	ppm	ASTM D5185m	<b>0</b>	0	---
Silver	ppm	ASTM D5185m >5	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m >50	<b>26</b>	35	---
Lead	ppm	ASTM D5185m >50	<b>28</b>	34	---
Copper	ppm	ASTM D5185m >225	<b>26</b>	34	---
Tin	ppm	ASTM D5185m >10	<b>1</b>	1	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>65</b>	82	---
Barium	ppm	ASTM D5185m	<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m	<b>0</b>	0	---
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	<1	---
Magnesium	ppm	ASTM D5185m	<b>3</b>	<1	---
Calcium	ppm	ASTM D5185m	<b>114</b>	107	---
Phosphorus	ppm	ASTM D5185m	<b>219</b>	250	---
Zinc	ppm	ASTM D5185m	<b>25</b>	20	---
Sulfur	ppm	ASTM D5185m	<b>1378</b>	1727	---

## CONTAMINANTS


	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	<b>7</b>	8	---
Sodium	ppm	ASTM D5185m	<b>2</b>	8	---
Potassium	ppm	ASTM D5185m >20	<b>0</b>	<1	---

## VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual NONE	<b>NONE</b>	NONE	---
Precipitate	scalar	*Visual NONE	<b>NONE</b>	NONE	---
Silt	scalar	*Visual NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual >0.1	<b>NEG</b>	NEG	---
Free Water	scalar	*Visual	<b>NEG</b>	NEG	---



# OIL ANALYSIS REPORT

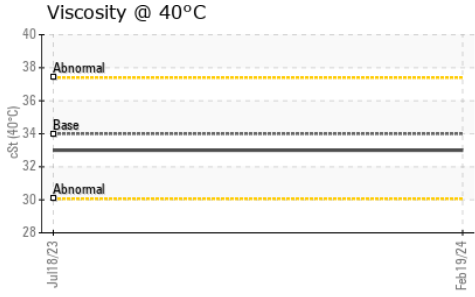




### FLUID PROPERTIES

method	limit/base	current	history1	history2
Visc @ 40°C	cSt ASTM D445 34	<b>33.0</b>	33.0	---

### SAMPLE IMAGES

method	limit/base	current	history1	history2
Color		no image	no image	no image
Bottom		no image	no image	no image

### GRAPHS

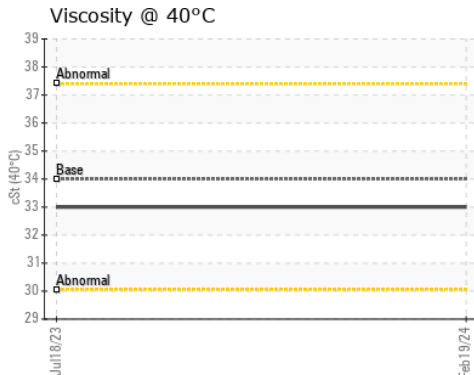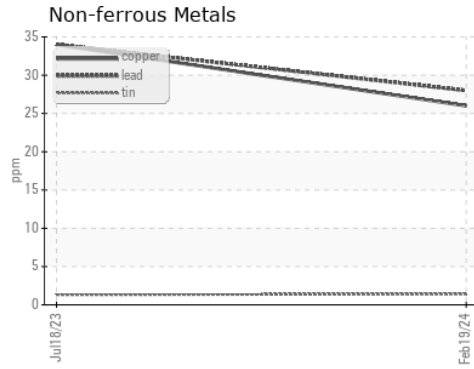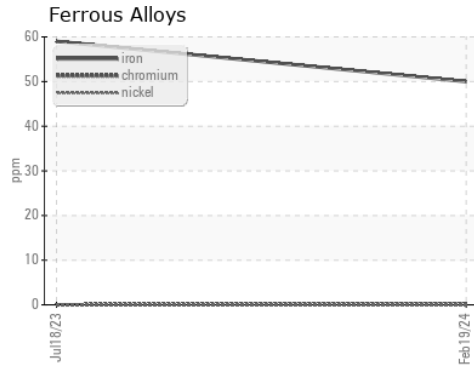

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0108074      **Received** : 26 Feb 2024  
**Lab Number** : 06101251      **Tested** : 28 Feb 2024  
**Unique Number** : 10899481      **Diagnosed** : 28 Feb 2024 - Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 836 - Kansas City Hauling**  
 7801 East Truman Road  
 Kansas City, MO  
 US 64126  
 Contact: Loyce Stewart  
 loyce.stewart@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: