




OIL ANALYSIS REPORT

Sample Rating Trend

WEAR



Machine Id
WL0098-492
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

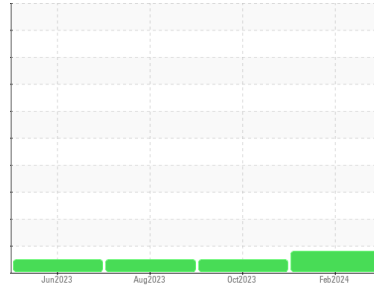

DIAGNOSIS

▲ Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor. (Customer Sample Comment: PM4 service completed)

▲ Wear

The aluminum level is abnormal. All other component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0101622	GFL0088294	GFL0077538
Sample Date	Client Info	21 Feb 2024	16 Oct 2023	03 Aug 2023
Machine Age	hrs	13259	12796	12249
Oil Age	hrs	463	547	387
Oil Changed	Client Info	Changed	Changed	Changed
Sample Status		ABNORMAL	NORMAL	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<1.0	<1.0	<1.0
Water	WC Method >0.2	NEG	NEG	NEG
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	37	76	20
Chromium	ppm ASTM D5185m >20	1	1	<1
Nickel	ppm ASTM D5185m >2	<1	<1	0
Titanium	ppm ASTM D5185m >2	<1	<1	0
Silver	ppm ASTM D5185m >2	0	0	0
Aluminum	ppm ASTM D5185m >25	▲ 32	7	6
Lead	ppm ASTM D5185m >40	0	0	0
Copper	ppm ASTM D5185m >330	1	<1	<1
Tin	ppm ASTM D5185m >15	<1	<1	0
Vanadium	ppm ASTM D5185m	<1	0	<1
Cadmium	ppm ASTM D5185m	<1	<1	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	3	<1	3
Barium	ppm ASTM D5185m 0	<1	3	0
Molybdenum	ppm ASTM D5185m 60	60	57	61
Manganese	ppm ASTM D5185m 0	<1	<1	0
Magnesium	ppm ASTM D5185m 1010	851	840	971
Calcium	ppm ASTM D5185m 1070	996	992	1155
Phosphorus	ppm ASTM D5185m 1150	1003	922	1035
Zinc	ppm ASTM D5185m 1270	1163	1093	1239
Sulfur	ppm ASTM D5185m 2060	3061	2681	3640

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	7	5	3
Sodium	ppm ASTM D5185m	<1	3	2
Potassium	ppm ASTM D5185m >20	2	2	0

INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	0.6	0.2	0.1
Nitration	Abs/cm *ASTM D7624 >20	10.1	7.2	6.2
Sulfation	Abs/.1mm *ASTM D7415 >30	20.2	16.8	16.7


FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	18.3	13.7	13.1
Base Number (BN)	mg KOH/g ASTM D2896 9.8	6.2	7.8	8.1




OIL ANALYSIS REPORT


▲ Aluminum (ppm)

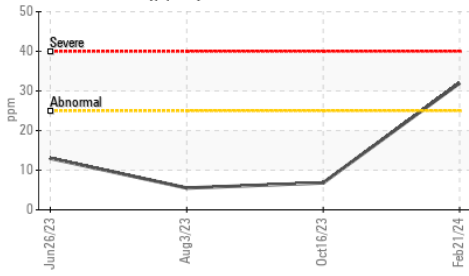

Base Number

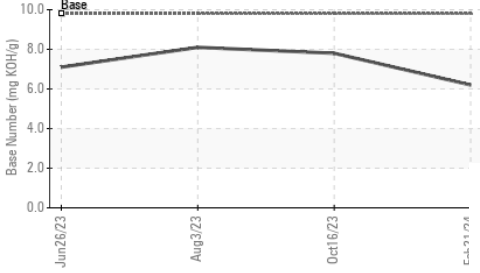

Viscosity @ 100°C

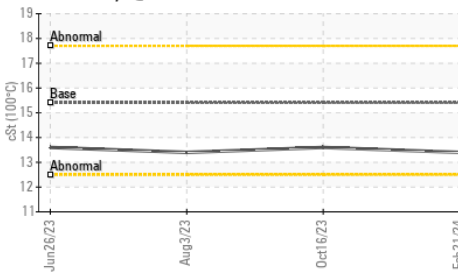


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	13.4	13.6

GRAPHS


Ferrous Alloys

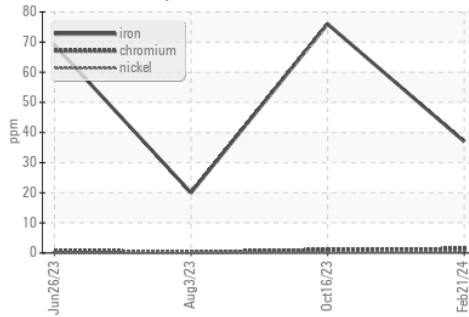


Non-ferrous Metals

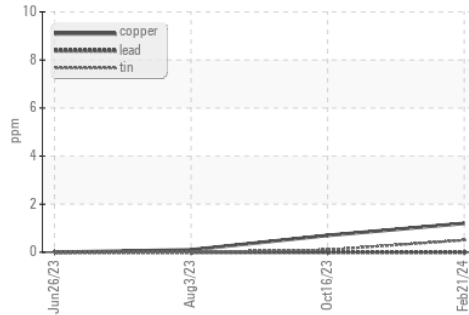

Viscosity @ 100°C

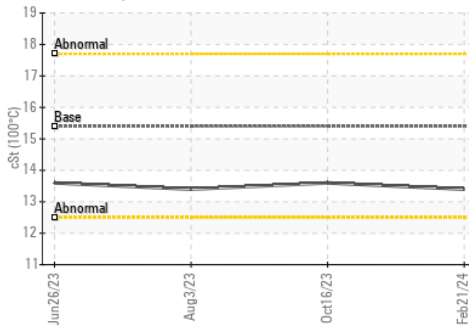

Base Number

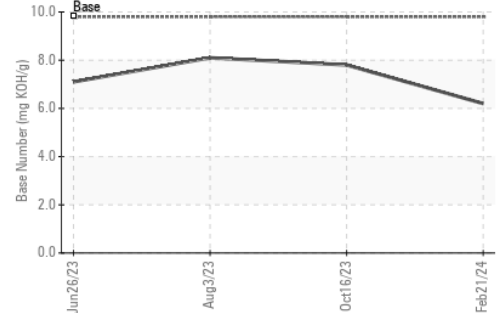

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0101622
Lab Number : 06102309
Unique Number : 10900539
Test Package : FLEET

Received : 27 Feb 2024
Tested : 28 Feb 2024
Diagnosed : 29 Feb 2024 - Sean Felton

GFL Environmental - 625 - Harrison Hauling
 4102 Industrial Pkwy
 Harrison, MI
 US 48625
 Contact: Glenda Standen
 gstanden@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: