




# OIL ANALYSIS REPORT

Sample Rating Trend

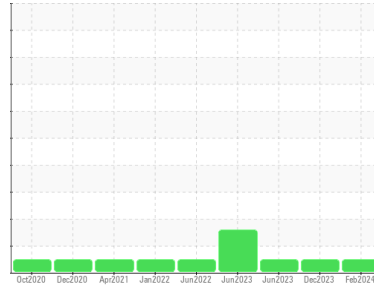

**NORMAL**



Machine Id  
**927015-9024**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- LTR)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0101315</b>	GFL0045478	GFL0074361
Sample Date	Client Info		<b>22 Feb 2024</b>	07 Dec 2023	05 Jun 2023
Machine Age	hrs	Client Info	<b>18383</b>	17913	17456
Oil Age	hrs	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>Changed</b>	Changed	Not Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >110	<b>14</b>	23	11
Chromium	ppm	ASTM D5185m >4	<b>1</b>	1	<1
Nickel	ppm	ASTM D5185m >2	<b>&lt;1</b>	<1	0
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Silver	ppm	ASTM D5185m >2	<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185m >25	<b>8</b>	2	<1
Lead	ppm	ASTM D5185m >45	<b>&lt;1</b>	1	0
Copper	ppm	ASTM D5185m >85	<b>2</b>	2	3
Tin	ppm	ASTM D5185m >4	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>3</b>	4	3
Barium	ppm	ASTM D5185m 0	<b>&lt;1</b>	11	0
Molybdenum	ppm	ASTM D5185m 60	<b>84</b>	81	60
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 1010	<b>1267</b>	1269	960
Calcium	ppm	ASTM D5185m 1070	<b>1360</b>	1369	1059
Phosphorus	ppm	ASTM D5185m 1150	<b>1374</b>	1296	1004
Zinc	ppm	ASTM D5185m 1270	<b>1640</b>	1620	1249
Sulfur	ppm	ASTM D5185m 2060	<b>4361</b>	4464	3628

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >30	<b>13</b>	14	9
Sodium	ppm	ASTM D5185m	<b>4</b>	4	3
Potassium	ppm	ASTM D5185m >20	<b>3</b>	4	5

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.3</b>	0.3	0.3
Nitration	Abs/cm	*ASTM D7624 >20	<b>7.1</b>	7.0	5.3
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>18.8</b>	18.9	18.3

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>14.5</b>	14.5	16.1
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>8.3</b>	8.1	9.0







# OIL ANALYSIS REPORT

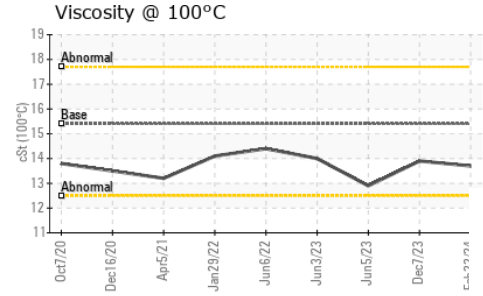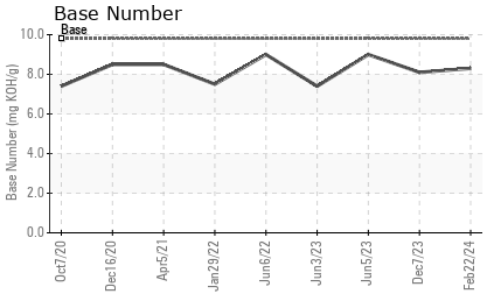

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.7</b>	13.9	12.9

## GRAPHS

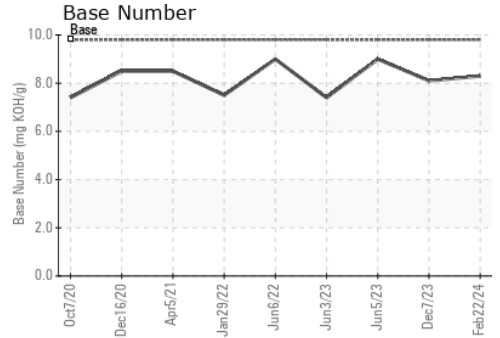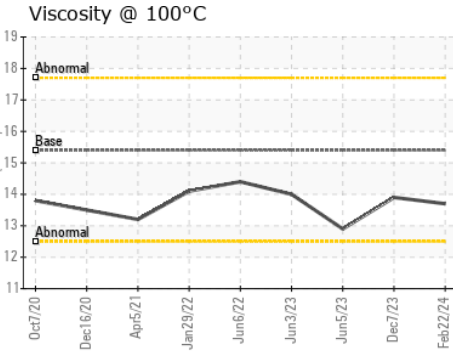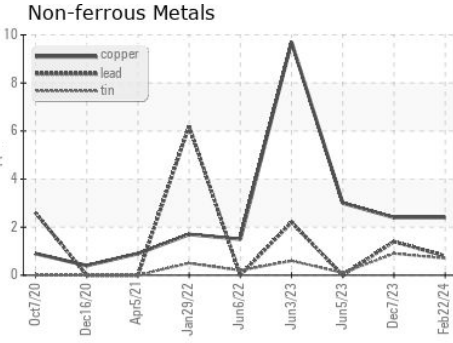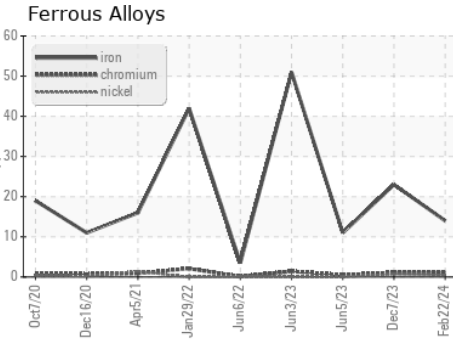

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0101315 **Received** : 27 Feb 2024  
**Lab Number** : **06102312** **Tested** : 28 Feb 2024  
**Unique Number** : 10900542 **Diagnosed** : 29 Feb 2024 - Sean Felton  
**Test Package** : FLEET

**GFL Environmental - 654 - Richmond Hauling**  
 11800 Lewis Road  
 Chester, VA  
 US 23831  
 Contact: Jimmy Mayes  
 jmayes@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)