


# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

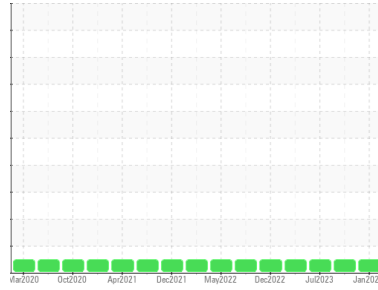

Area  
**600HP**  
 Machine Id  
**217421 [600HP]**  
 Component  
**Diesel Engine**  
 Fluid  
 **DIESEL ENGINE OIL SAE 10W30 (38 QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PCA0101210</b>	PCA0101268	PCA0101186
Sample Date	Client Info			<b>06 Jan 2024</b>	19 Oct 2023	28 Jul 2023
Machine Age	mls Client Info			<b>671141</b>	644103	612497
Oil Age	mls Client Info			<b>0</b>	30000	30000
Oil Changed	Client Info			<b>Changed</b>	Changed	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>3.0		<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2		<b>NEG</b>	NEG	NEG
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>65	<b>14</b>	16	15
Chromium	ppm	ASTM D5185m	>5	<b>1</b>	1	1
Nickel	ppm	ASTM D5185m	>3	<b>&lt;1</b>	<1	0
Titanium	ppm	ASTM D5185m	>5	<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m	>2	<b>&lt;1</b>	<1	<1
Aluminum	ppm	ASTM D5185m	>35	<b>5</b>	4	4
Lead	ppm	ASTM D5185m	>10	<b>0</b>	0	0
Copper	ppm	ASTM D5185m	>180	<b>4</b>	7	6
Tin	ppm	ASTM D5185m	>8	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	<1
Cadmium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0



ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	250	<b>15</b>	0	0
Barium	ppm	ASTM D5185m	10	<b>&lt;1</b>	4	0
Molybdenum	ppm	ASTM D5185m	100	<b>63</b>	75	61
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	450	<b>866</b>	1118	1014
Calcium	ppm	ASTM D5185m	3000	<b>1035</b>	1279	1154
Phosphorus	ppm	ASTM D5185m	1150	<b>1015</b>	1092	1008
Zinc	ppm	ASTM D5185m	1350	<b>1220</b>	1463	1328
Sulfur	ppm	ASTM D5185m	4250	<b>2965</b>	3343	3116

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	<b>5</b>	5	5
Sodium	ppm	ASTM D5185m		<b>0</b>	0	2
Potassium	ppm	ASTM D5185m	>20	<b>4</b>	4	5

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0.6</b>	0.8	0.8
Nitration	Abs/cm	*ASTM D7624	>20	<b>8.5</b>	8.8	8.7
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>20.4</b>	21.2	20.6

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>16.4</b>	17.4	16.9
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	<b>6.4</b>	6.7	6.5





# OIL ANALYSIS REPORT

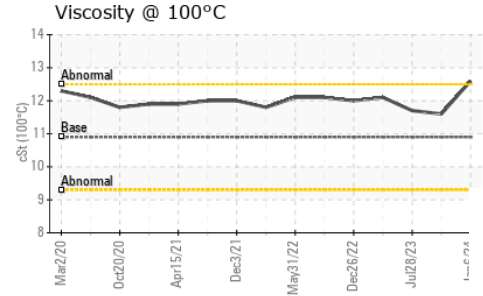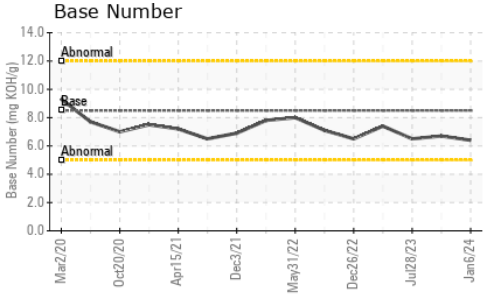

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	10.9	<b>12.6</b>	11.6	11.7

## GRAPHS

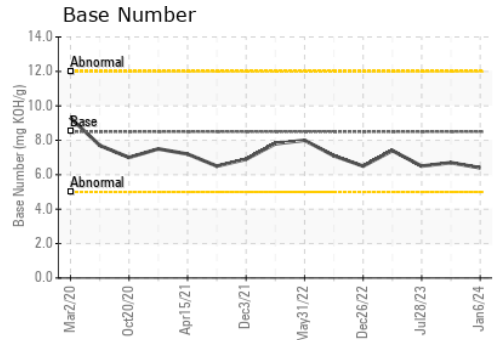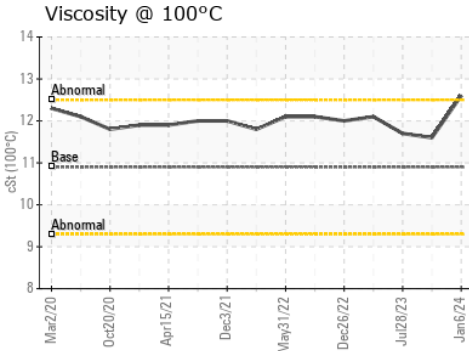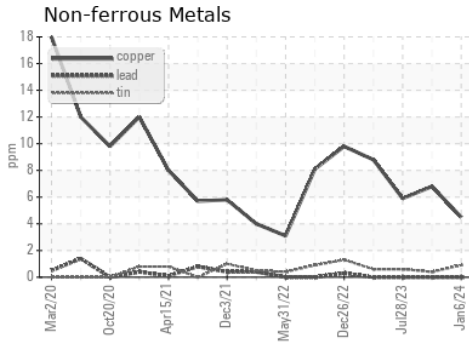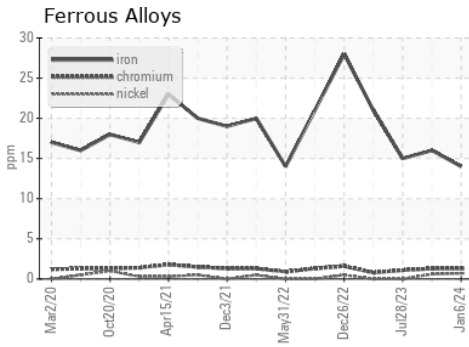

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0101210      **Received** : 27 Feb 2024  
**Lab Number** : **06102337**      **Tested** : 28 Feb 2024  
**Unique Number** : 10900567      **Diagnosed** : 29 Feb 2024 - Sean Felton  
**Test Package** : FLEET

**McLane Company - High Plains - 600HP**  
 1717 East Loop 289  
 LUBBOCK, TX  
 US 79403  
 Contact: RITA GARCIA  
 rita.garcia@mcclaneco.com  
 T: (806)766-2902  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)