




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

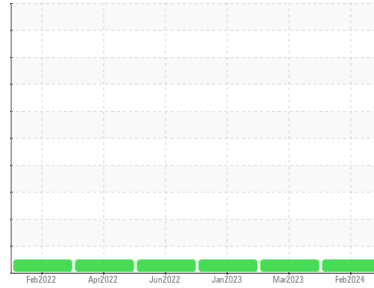

Machine Id  
**928070-205267**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0087912</b>	GFL0056958	GFL0060279
Sample Date	Client Info	<b>27 Feb 2024</b>	07 Mar 2023	20 Jan 2023
Machine Age	hrs	<b>0</b>	0	12158
Oil Age	hrs	<b>600</b>	600	600
Oil Changed	Client Info	<b>Changed</b>	Changed	Changed
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >90	<b>19</b>	17	29
Chromium	ppm ASTM D5185m >20	<b>1</b>	1	2
Nickel	ppm ASTM D5185m >2	<b>&lt;1</b>	0	0
Titanium	ppm ASTM D5185m >2	<b>&lt;1</b>	<1	0
Silver	ppm ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm ASTM D5185m >20	<b>2</b>	2	2
Lead	ppm ASTM D5185m >40	<b>&lt;1</b>	1	<1
Copper	ppm ASTM D5185m >330	<b>2</b>	<1	1
Tin	ppm ASTM D5185m >15	<b>&lt;1</b>	<1	<1
Vanadium	ppm ASTM D5185m	<b>0</b>	<1	0
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>&lt;1</b>	4	6
Barium	ppm ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm ASTM D5185m 60	<b>63</b>	57	60
Manganese	ppm ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm ASTM D5185m 1010	<b>1002</b>	922	940
Calcium	ppm ASTM D5185m 1070	<b>1086</b>	1056	1061
Phosphorus	ppm ASTM D5185m 1150	<b>1045</b>	945	993
Zinc	ppm ASTM D5185m 1270	<b>1301</b>	1223	1205
Sulfur	ppm ASTM D5185m 2060	<b>3307</b>	2788	3491

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>15</b>	7	7
Sodium	ppm ASTM D5185m	<b>6</b>	5	9
Potassium	ppm ASTM D5185m >20	<b>8</b>	<1	<1

## INFRA-RED



method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >6	<b>0.3</b>	0.2	0.3
Nitration	Abs/cm *ASTM D7624 >20	<b>7.9</b>	7.2	7.7
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>19.4</b>	19.3	19.5

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>15.7</b>	14.9	15.3
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>8.6</b>	8.6	8.8








# OIL ANALYSIS REPORT

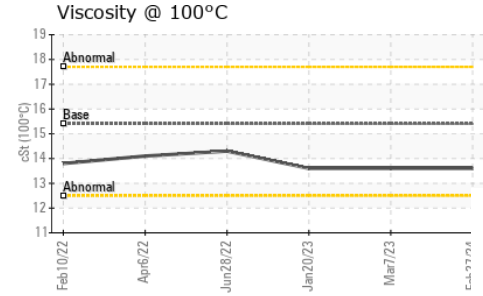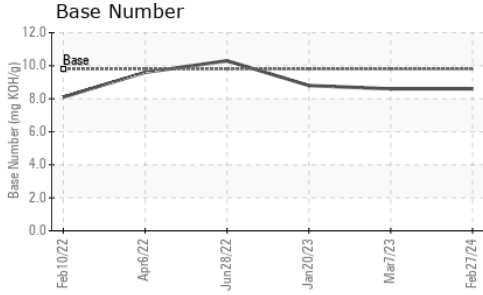

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.6</b>	13.6	13.6

## GRAPHS

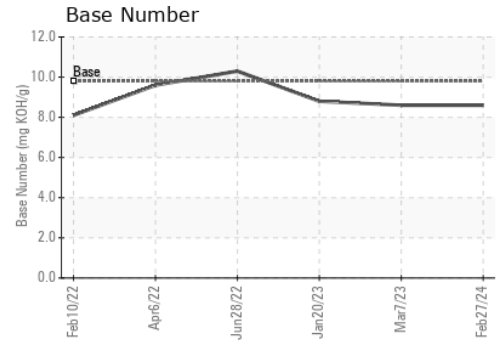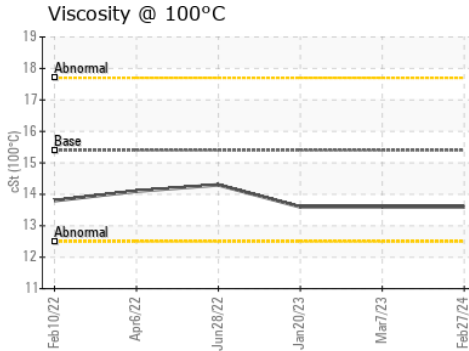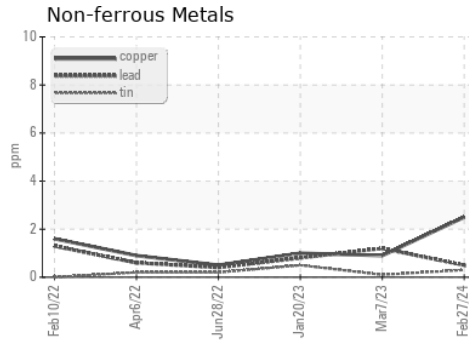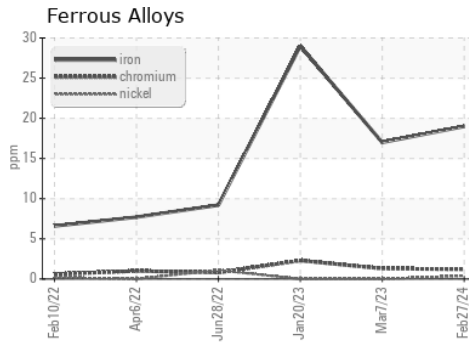

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0087912  
**Lab Number** : **06102832**  
**Unique Number** : 10901062  
**Test Package** : FLEET

**Received** : 28 Feb 2024  
**Tested** : 29 Feb 2024  
**Diagnosed** : 29 Feb 2024 - Wes Davis

**GFL Environmental - 859 - Bay City**  
 700 Avenue F  
 Bay City, TX  
 US 77414

Contact: JONATHON BROWN  
jonathon.brown@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: