




OIL ANALYSIS REPORT

Sample Rating Trend

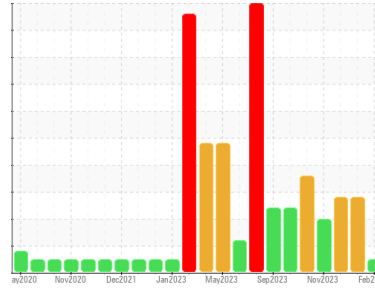

NORMAL



Machine Id
820018-101303

Component
Diesel Engine

Fluid
CHEVRON DELO 400 MULTIGRADE 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0102970	GFL0102977	GFL0086414
Sample Date	Client Info	27 Feb 2024	15 Jan 2024	19 Dec 2023
Machine Age	hrs	9642	9474	9313
Oil Age	hrs	0	0	0
Oil Changed	Client Info	N/A	N/A	N/A
Sample Status		NORMAL	ABNORMAL	SEVERE

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<1.0	▲ 3.9	▲ 9.9
Water	WC Method >0.2	NEG	NEG	NEG
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	7	11	5
Chromium	ppm ASTM D5185m >20	<1	<1	<1
Nickel	ppm ASTM D5185m >4	0	0	0
Titanium	ppm ASTM D5185m	0	0	0
Silver	ppm ASTM D5185m >3	0	0	0
Aluminum	ppm ASTM D5185m >20	2	2	<1
Lead	ppm ASTM D5185m >40	0	0	0
Copper	ppm ASTM D5185m >330	<1	1	<1
Tin	ppm ASTM D5185m >15	0	0	0
Vanadium	ppm ASTM D5185m	0	<1	<1
Cadmium	ppm ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m	13	● 10	0
Barium	ppm ASTM D5185m	0	0	0
Molybdenum	ppm ASTM D5185m	69	55	55
Manganese	ppm ASTM D5185m	<1	<1	<1
Magnesium	ppm ASTM D5185m	984	● 862	876
Calcium	ppm ASTM D5185m	1156	● 1075	929
Phosphorus	ppm ASTM D5185m 1360	1132	● 1004	961
Zinc	ppm ASTM D5185m 1480	1350	1201	1129
Sulfur	ppm ASTM D5185m	3313	2977	2906

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	4	4	3
Sodium	ppm ASTM D5185m	16	15	10
Potassium	ppm ASTM D5185m >20	1	3	1

INFRA-RED



method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	0.4	0.5	0.2
Nitration	Abs/cm *ASTM D7624 >20	7.4	10.3	8.5
Sulfation	Abs/.1mm *ASTM D7415 >30	18.9	21.0	19.6

FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	14.7	18.2	16.8
Base Number (BN)	mg KOH/g ASTM D2896 12.2	8.4	8.1	8.5







OIL ANALYSIS REPORT

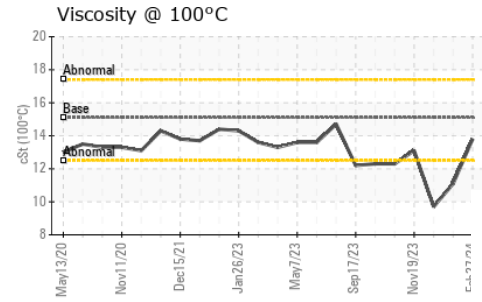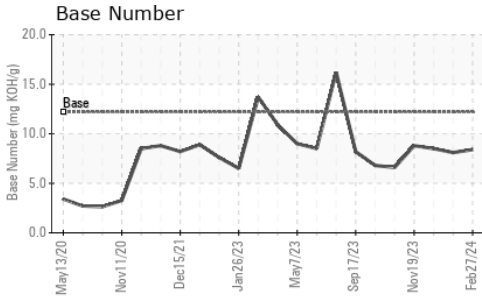

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.1	13.8	▲ 11.1 ▲ 9.7

GRAPHS

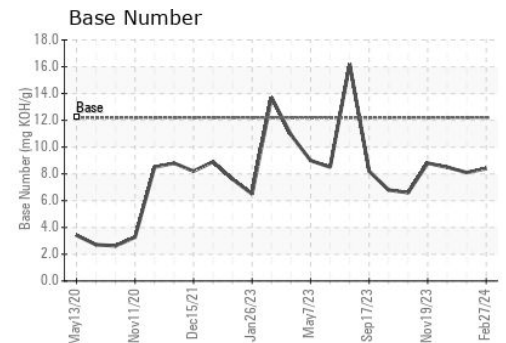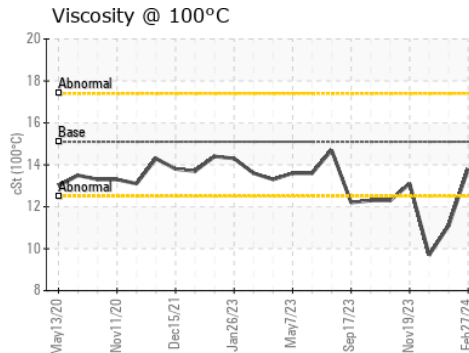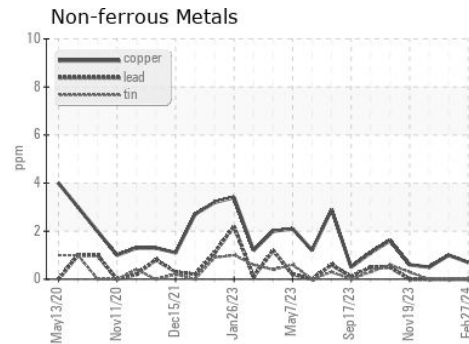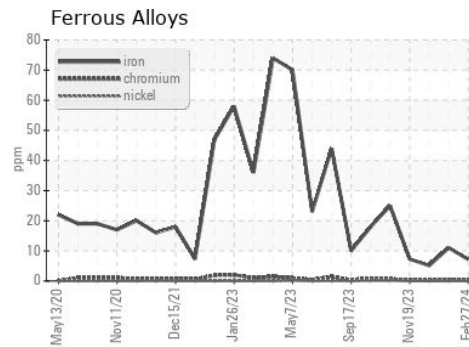

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0102970
Lab Number : 06103576
Unique Number : 10901806
Test Package : FLEET

Received : 28 Feb 2024
Tested : 02 Mar 2024
Diagnosed : 02 Mar 2024 - Don Baldrige

GFL Environmental - 816 - WCA of South Arkansas
 3083 Smackover Hwy
 El Dorado, AR
 US 71730
 Contact: Mike Howell
 mike.howell@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: