




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

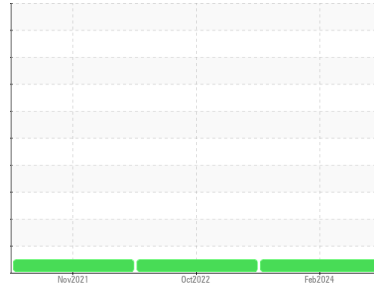

Machine Id  
**827040 MACK LR613**  
 Component  
**Diesel Engine**  
 Fluid  
**TIER ONE 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. ( Customer Sample Comment: Sampled only )

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0102217</b>	GFL0056984	GFL0038736
Sample Date	Client Info		<b>26 Feb 2024</b>	03 Oct 2022	15 Nov 2021
Machine Age	hrs	Client Info	<b>14408</b>	12484	10798
Oil Age	hrs	Client Info	<b>300</b>	600	600
Oil Changed	Client Info		<b>Not Chngd</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >120	<b>25</b>	3	11
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	0	<1
Nickel	ppm	ASTM D5185m >5	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m >2	<b>&lt;1</b>	0	2
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185m >20	<b>3</b>	2	5
Lead	ppm	ASTM D5185m >40	<b>9</b>	<1	2
Copper	ppm	ASTM D5185m >330	<b>5</b>	<1	3
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	<1	<1
Antimony	ppm	ASTM D5185m	<b>---</b>	---	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	<1
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>69</b>	5	206
Barium	ppm	ASTM D5185m	<b>0</b>	<1	0
Molybdenum	ppm	ASTM D5185m	<b>73</b>	59	115
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	0	<1
Magnesium	ppm	ASTM D5185m	<b>815</b>	836	652
Calcium	ppm	ASTM D5185m	<b>1190</b>	1076	1628
Phosphorus	ppm	ASTM D5185m	<b>925</b>	968	696
Zinc	ppm	ASTM D5185m	<b>1120</b>	1162	762
Sulfur	ppm	ASTM D5185m	<b>2716</b>	3102	2076

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>12</b>	3	6
Sodium	ppm	ASTM D5185m	<b>3</b>	4	2
Potassium	ppm	ASTM D5185m >20	<b>1</b>	2	1

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >4	<b>0.3</b>	0.4	0.2
Nitration	Abs/cm	*ASTM D7624 >20	<b>9.7</b>	9.4	10.2
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>21.9</b>	21.2	25

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>19.3</b>	17.6	21.2
Base Number (BN)	mg KOH/g	ASTM D2896	<b>7.0</b>	7.8	6.5







# OIL ANALYSIS REPORT

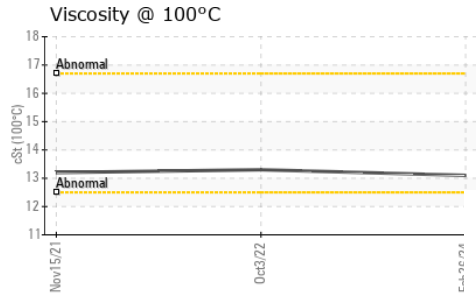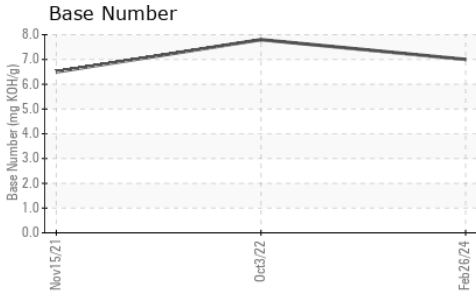

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	13.1	13.3	13.2

## GRAPHS

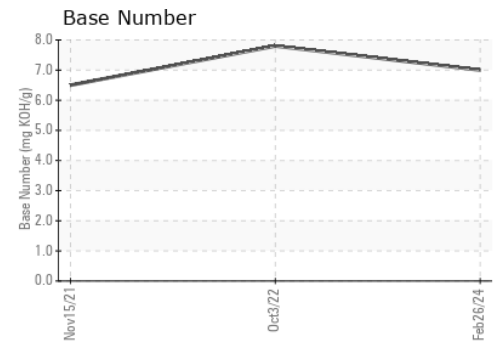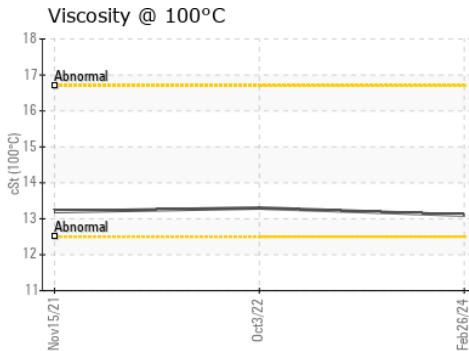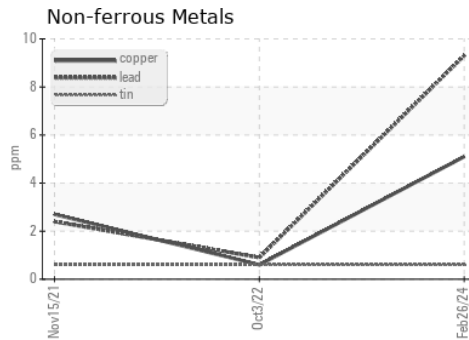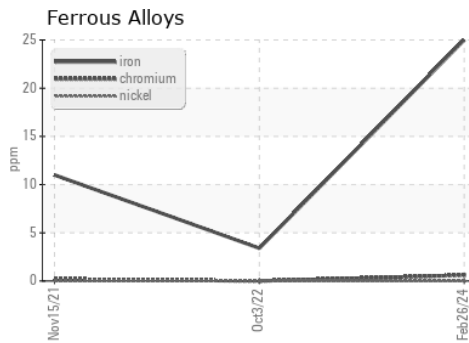

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : GFL0102217  
 Lab Number : 06103589  
 Unique Number : 10901819  
 Test Package : FLEET

Received : 28 Feb 2024  
 Tested : 29 Feb 2024  
 Diagnosed : 01 Mar 2024 - Don Baldrige

GFL Environmental - 642- Grand Rapids Hauling  
 5826 Alden Nash Ave SE  
 Lowell, MI  
 US 49331

Contact: Chad Crosby  
 ccrosby@gflenv.com

T: (616)299-8425

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)