




OIL ANALYSIS REPORT

Sample Rating Trend

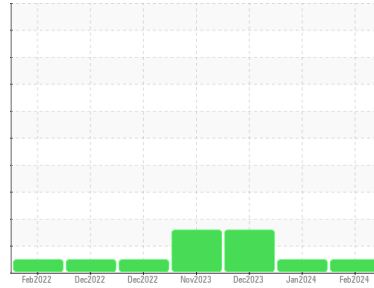

NORMAL



Machine Id
222048-670466

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0101896	GFL0101975	GFL0101953
Sample Date	Client Info	27 Feb 2024	30 Jan 2024	22 Dec 2023
Machine Age	hrs	6422	6408	6400
Oil Age	hrs	22	8	128
Oil Changed	Client Info	Not Chngd	Not Chngd	Changed
Sample Status		NORMAL	NORMAL	ABNORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<1.0	<1.0	<1.0
Water	WC Method >0.2	NEG	NEG	NEG
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	24	24	▲ 126
Chromium	ppm ASTM D5185m >20	<1	<1	3
Nickel	ppm ASTM D5185m >2	0	<1	<1
Titanium	ppm ASTM D5185m >2	<1	<1	0
Silver	ppm ASTM D5185m >2	0	0	0
Aluminum	ppm ASTM D5185m >25	9	10	▲ 50
Lead	ppm ASTM D5185m >40	0	1	0
Copper	ppm ASTM D5185m >330	<1	<1	3
Tin	ppm ASTM D5185m >15	0	<1	0
Vanadium	ppm ASTM D5185m	0	<1	0
Cadmium	ppm ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	6	7	5
Barium	ppm ASTM D5185m 0	0	0	0
Molybdenum	ppm ASTM D5185m 60	56	56	46
Manganese	ppm ASTM D5185m 0	<1	<1	1
Magnesium	ppm ASTM D5185m 1010	905	892	843
Calcium	ppm ASTM D5185m 1070	1007	1000	972
Phosphorus	ppm ASTM D5185m 1150	1037	1066	843
Zinc	ppm ASTM D5185m 1270	1208	1236	1089
Sulfur	ppm ASTM D5185m 2060	3046	3181	2744

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	10	10	12
Sodium	ppm ASTM D5185m	<1	1	2
Potassium	ppm ASTM D5185m >20	0	2	0

INFRA-RED



method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	0.1	0.1	0.4
Nitration	Abs/cm *ASTM D7624 >20	4.9	4.9	8.1
Sulfation	Abs/.1mm *ASTM D7415 >30	17.3	17.2	18.1

FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	13.3	13.4	16.0
Base Number (BN)	mg KOH/g ASTM D2896 9.8	9.4	9.2	9.2







OIL ANALYSIS REPORT

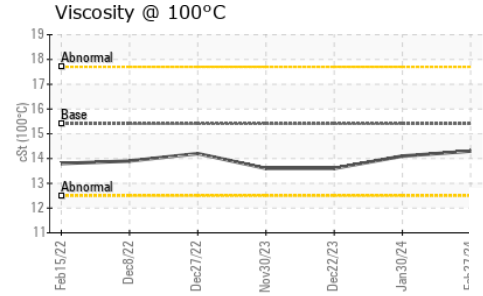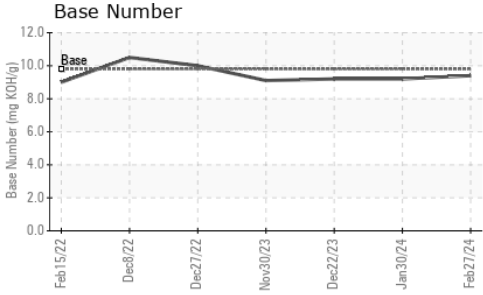

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	14.3	14.1	13.6

GRAPHS

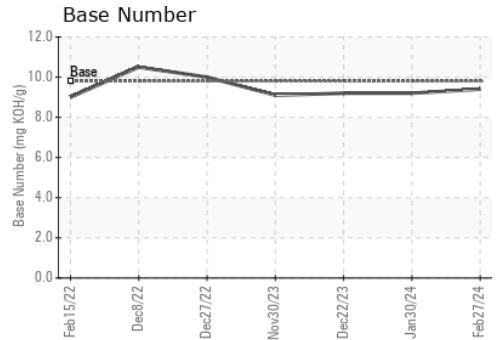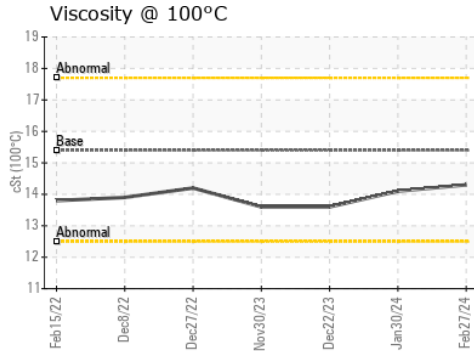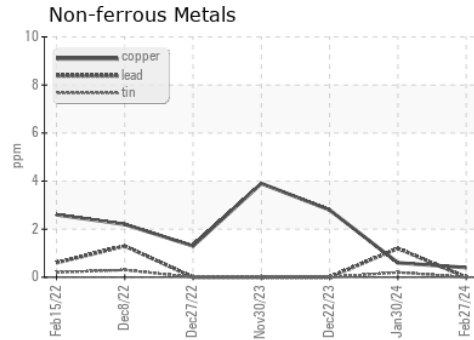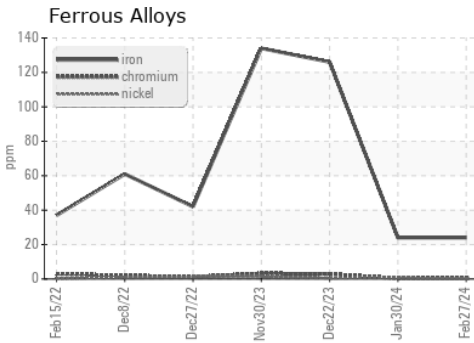

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : GFL0101896
 Lab Number : **06103615**
 Unique Number : 10901845
 Test Package : FLEET

Received : 28 Feb 2024
 Tested : 29 Feb 2024
 Diagnosed : 29 Feb 2024 - Wes Davis

GFL Environmental - 894 - Ada Hauling
 1904 North Broadway, Suite D
 Ada, OK
 US 74820
 Contact: Johnny Spurlock
 jspurlock@gflenv.com
 T: (405)664-4476
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)