




OIL ANALYSIS REPORT

Sample Rating Trend

WEAR



Machine Id
934024
 Component
Natural Gas Engine
 Fluid
PETRO CANADA DURON GEO LD 15W40 (--- GAL)

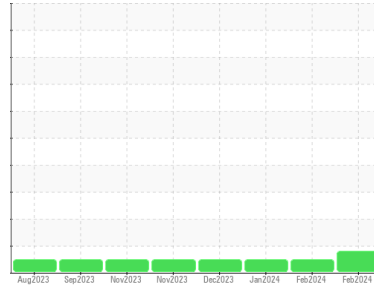

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

Cylinder, crank, or cam shaft wear is indicated. All other component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0109795	GFL0109812	GFL0103341
Sample Date	Client Info		27 Feb 2024	01 Feb 2024	09 Jan 2024
Machine Age	hrs	Client Info	1099	964	8257
Oil Age	hrs	Client Info	0	0	0
Oil Changed	Client Info		Not Chngd	Not Chngd	Not Chngd
Sample Status			ABNORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >50	▲ 54	14	11
Chromium	ppm	ASTM D5185m >5	2	<1	0
Nickel	ppm	ASTM D5185m >4	2	0	0
Titanium	ppm	ASTM D5185m >5	0	0	0
Silver	ppm	ASTM D5185m >3	0	0	0
Aluminum	ppm	ASTM D5185m >25	6	3	2
Lead	ppm	ASTM D5185m >40	3	11	<1
Copper	ppm	ASTM D5185m >150	10	2	2
Tin	ppm	ASTM D5185m >4	2	1	2
Vanadium	ppm	ASTM D5185m	<1	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 50	12	8	3
Barium	ppm	ASTM D5185m 5	0	0	0
Molybdenum	ppm	ASTM D5185m 50	61	57	58
Manganese	ppm	ASTM D5185m 0	10	<1	<1
Magnesium	ppm	ASTM D5185m 560	895	642	921
Calcium	ppm	ASTM D5185m 1510	1933	1775	980
Phosphorus	ppm	ASTM D5185m 780	920	833	1063
Zinc	ppm	ASTM D5185m 870	1290	1061	1241
Sulfur	ppm	ASTM D5185m 2040	2929	2607	3043

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	19	5	7
Sodium	ppm	ASTM D5185m	4	12	<1
Potassium	ppm	ASTM D5185m >20	6	<1	1

INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	0.1	0	0.2
Nitration	Abs/cm	*ASTM D7624 >20	12.7	12.7	8.8
Sulfation	Abs/.1mm	*ASTM D7415 >30	23.7	27.0	18.6


FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	20.4	22.5	15.6
Base Number (BN)	mg KOH/g	ASTM D2896 10.2	6.6	3.1	6.1




OIL ANALYSIS REPORT


▲ Ferrous Alloys

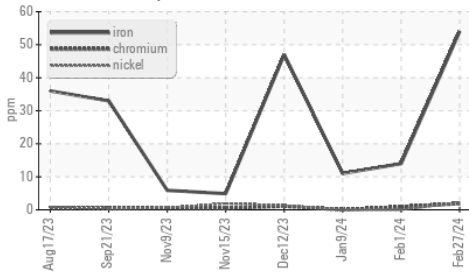

Base Number

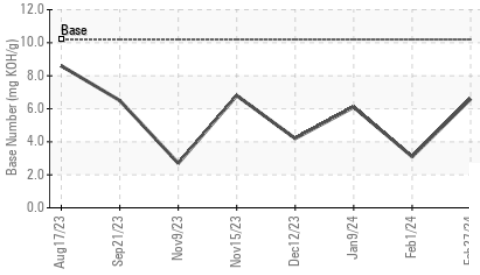

Viscosity @ 100°C

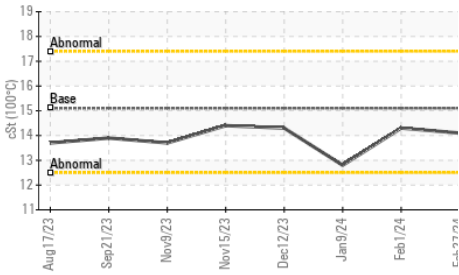

VISUAL


Item	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES


Property	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.1	14.3	12.8

GRAPHS


▲ Ferrous Alloys

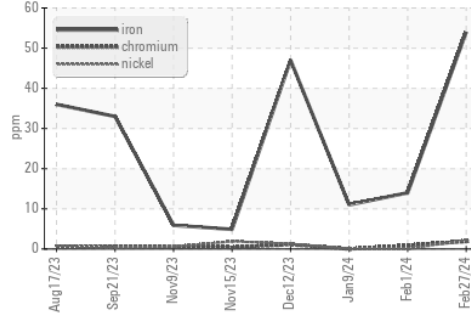


Non-ferrous Metals

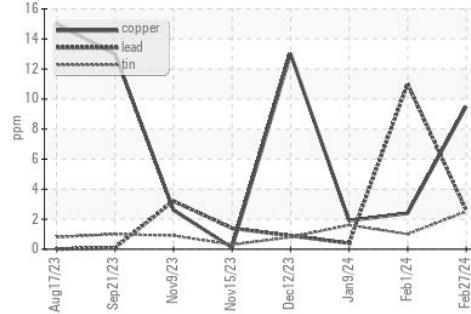

Viscosity @ 100°C

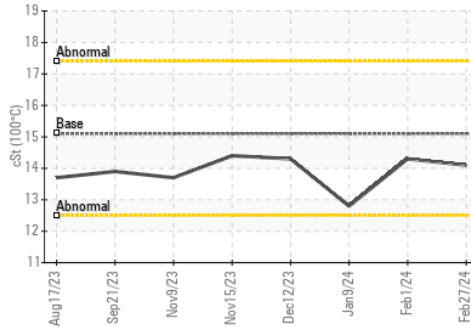

Base Number

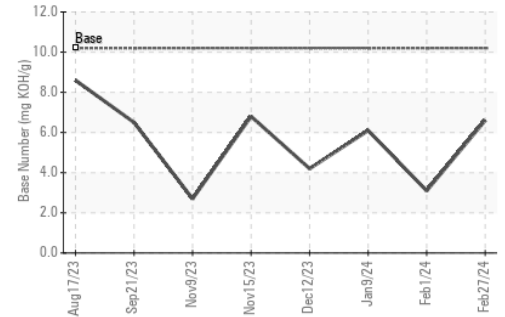

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : GFL0109795
 Lab Number : 06104190
 Unique Number : 10902420
 Test Package : FLEET

Received : 29 Feb 2024
 Tested : 01 Mar 2024
 Diagnosed : 02 Mar 2024 - Don Baldrige

GFL Environmental - 836 - Kansas City Hauling
 7801 East Truman Road
 Kansas City, MO
 US 64126
 Contact: Loyce Stewart
 loyce.stewart@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: