




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Area
(34744UA)
Machine Id
813000
Component
Diesel Engine
Fluid
DIESEL ENGINE OIL SAE 40 (--- GAL)

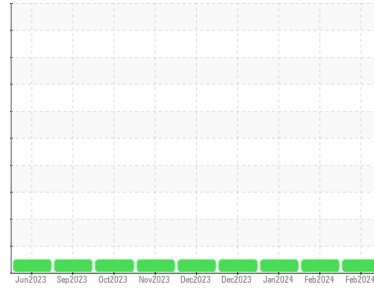

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal for time on oil.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2	
Sample Number	Client Info	GFL0111827	GFL0108252	GFL0108329	
Sample Date	Client Info	27 Feb 2024	09 Feb 2024	11 Jan 2024	
Machine Age	hrs	Client Info	3749	3627	3427
Oil Age	hrs	Client Info	3749	3627	3427
Oil Changed	Client Info	Changed	Not Changd	N/A	
Sample Status		NORMAL	NORMAL	NORMAL	

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >3.0	<1.0	<1.0	<1.0
Water	WC Method >0.2	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >120	23	15	11
Chromium	ppm ASTM D5185m >20	<1	<1	<1
Nickel	ppm ASTM D5185m >5	2	1	<1
Titanium	ppm ASTM D5185m >2	0	<1	<1
Silver	ppm ASTM D5185m >2	0	<1	0
Aluminum	ppm ASTM D5185m >20	1	2	2
Lead	ppm ASTM D5185m >40	<1	1	<1
Copper	ppm ASTM D5185m >330	2	2	2
Tin	ppm ASTM D5185m >15	1	2	1
Vanadium	ppm ASTM D5185m	<1	0	<1
Cadmium	ppm ASTM D5185m	0	<1	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 250	5	6	11
Barium	ppm ASTM D5185m 10	0	13	0
Molybdenum	ppm ASTM D5185m 100	63	56	61
Manganese	ppm ASTM D5185m	<1	<1	<1
Magnesium	ppm ASTM D5185m 450	1122	829	953
Calcium	ppm ASTM D5185m 3000	1331	1067	1124
Phosphorus	ppm ASTM D5185m 1150	1014	960	1078
Zinc	ppm ASTM D5185m 1350	1490	1101	1251
Sulfur	ppm ASTM D5185m 4250	3263	3241	3081

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	5	4	5
Sodium	ppm ASTM D5185m >216	5	0	2
Potassium	ppm ASTM D5185m >20	40	10	6
Glycol	% *ASTM D2982	NEG	NEG	NEG

INFRA-RED




method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >4	1.2	0.9	0.6
Nitration	Abs/cm *ASTM D7624 >20	9.7	8.5	7.1
Sulfation	Abs/.1mm *ASTM D7415 >30	21.3	19.8	19.0

FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	16.0	14.6	13.7
Base Number (BN)	mg KOH/g ASTM D2896 8.5	6.9	7.6	8.5







OIL ANALYSIS REPORT

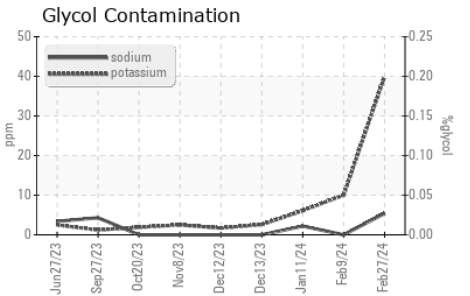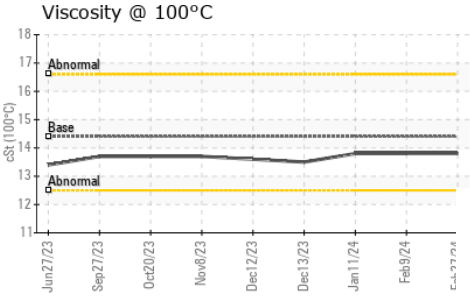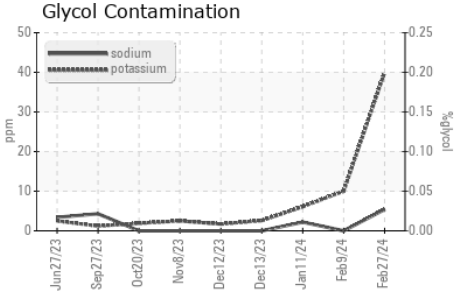

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.4	13.8	13.8

GRAPHS

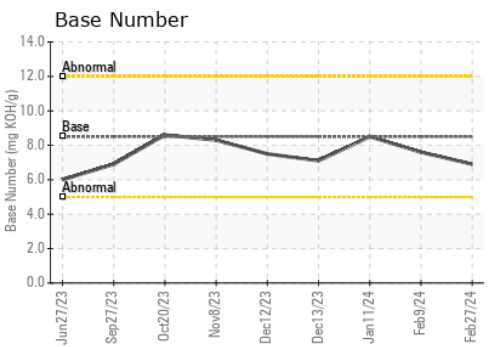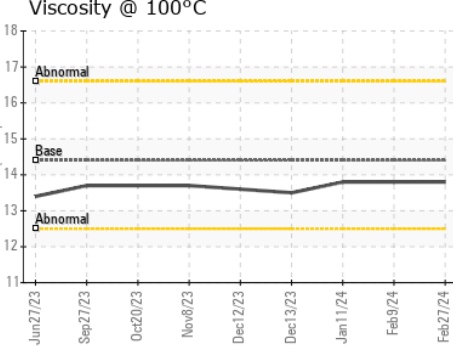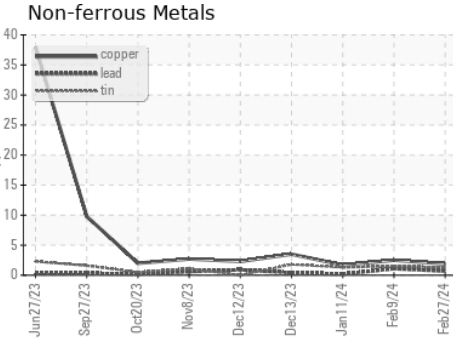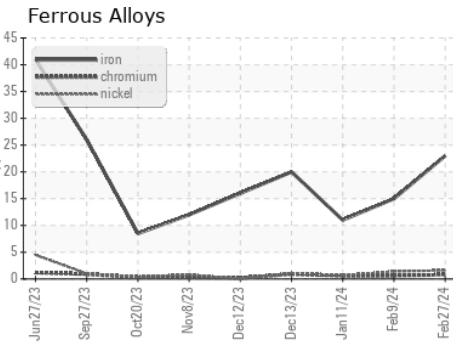

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : GFL0111827

Lab Number : 06104196

Unique Number : 10902426

Test Package : FLEET (Additional Tests: Glycol)

Received : 29 Feb 2024

Tested : 02 Mar 2024

Diagnosed : 02 Mar 2024 - Don Baldrige

GFL Environmental - 652 - Fredericksburg Hauling

10954 Houser Drive

Fredericksburg, VA

US 22408

Contact: WILLIAM MILO

wmilo@gflenv.com

T:

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)