


# OIL ANALYSIS REPORT

## Sample Rating Trend



**VIS DEBRIS**

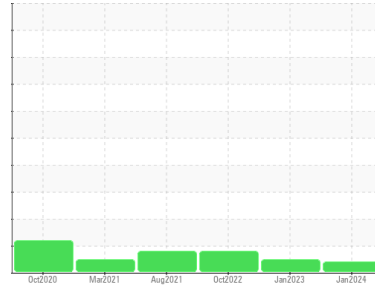

Machine Id  
**T298**  
 Component  
**Transmission (Auto)**  
 Fluid  
**COGNIS EMGARD 2805 ATF (--- QTS)**

### DIAGNOSIS

#### ▲ Recommendation

We suspect abnormal contamination may be due to sampling method. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### ▲ Contamination

Moderate concentration of visible dirt/debris present in the fluid.

#### Fluid Condition

The condition of the fluid is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PCA0089150</b>	PCA0089258	PCA0080487
Sample Date	Client Info			<b>04 Jan 2024</b>	27 Jan 2023	26 Oct 2022
Machine Age	mls Client Info			<b>241914</b>	182121	154730
Oil Age	mls Client Info			<b>77465</b>	27391	81742
Oil Changed	Client Info			<b>Changed</b>	Not Changd	Changed
Sample Status				<b>ABNORMAL</b>	NORMAL	ABNORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.1	<b>NEG</b>	NEG	NEG



WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>160	<b>75</b>	63	97
Chromium	ppm	ASTM D5185m	>5	<b>0</b>	0	<1
Nickel	ppm	ASTM D5185m	>5	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m	>5	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>50	<b>29</b>	17	42
Lead	ppm	ASTM D5185m	>50	<b>17</b>	31	▲ 82
Copper	ppm	ASTM D5185m	>225	<b>34</b>	40	70
Tin	ppm	ASTM D5185m	>10	<b>1</b>	2	7
Antimony	ppm	ASTM D5185m		<b>---</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>74</b>	113	152
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	1
Magnesium	ppm	ASTM D5185m		<b>11</b>	0	0
Calcium	ppm	ASTM D5185m		<b>161</b>	125	119
Phosphorus	ppm	ASTM D5185m		<b>217</b>	275	393
Zinc	ppm	ASTM D5185m		<b>30</b>	19	41
Sulfur	ppm	ASTM D5185m		<b>1771</b>	2291	2425

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	<b>18</b>	5	7
Sodium	ppm	ASTM D5185m		<b>3</b>	4	7
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	0	<1

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	<b>NONE</b>	LIGHT	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	▲ <b>MODER</b>	LIGHT	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	NEG
Free Water	scalar	*Visual		<b>NEG</b>	NEG	NEG

# OIL ANALYSIS REPORT

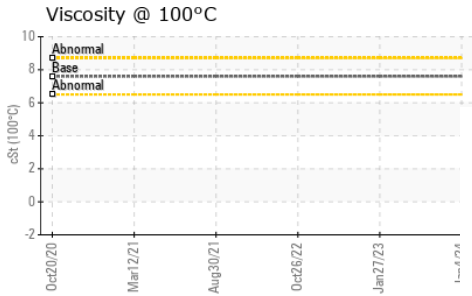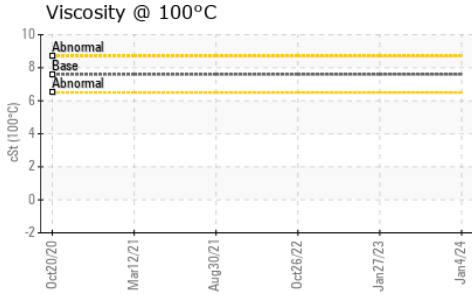




### FLUID PROPERTIES

method	limit/base	current	history1	history2
Visc @ 40°C	cSt ASTM D445	38.9	<b>32.62</b>	32.7 34.21

### SAMPLE IMAGES

method	limit/base	current	history1	history2
Color			no image	no image
Bottom			no image	no image

### GRAPHS

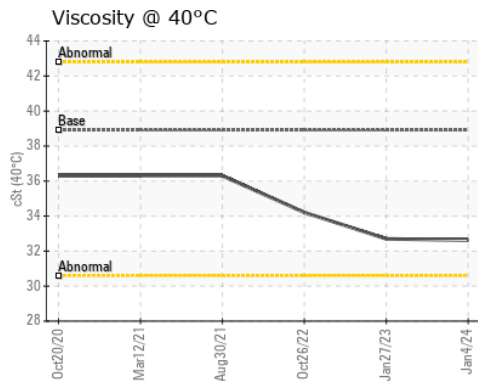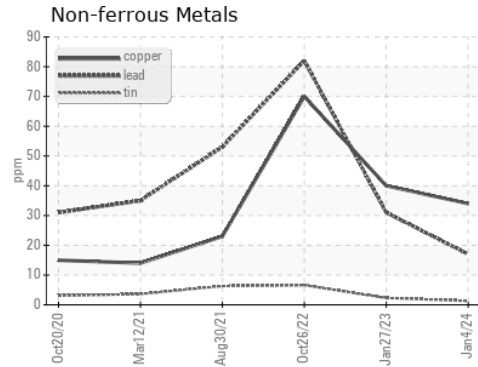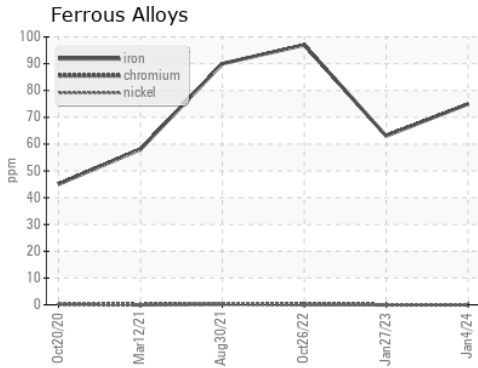

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0089150 **Received** : 29 Feb 2024  
**Lab Number** : **06104217** **Tested** : 05 Mar 2024  
**Unique Number** : 10902447 **Diagnosed** : 06 Mar 2024 - Jonathan Hester  
**Test Package** : FLEET ( Additional Tests: FT-IR, KV100 )

**NW WHITE & CO - GREER DIVISION**  
 1060 ROGERS BRIDGE RD  
 DUNCAN, SC  
 US 29334  
 Contact: Matt Quinlan  
 mquinlan@nwwhite.com  
 T: (864)905-8506  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)