


# **OIL ANALYSIS REPORT**

Sample Rating Trend





Machine Id Component

**Hydraulic System** 

AW HYDRAULIC OIL ISO 46 (--- LTR)

### DIAGNOSIS

#### Recommendation

The filter change at the time of sampling has been noted. Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

#### Wear

All component wear rates are normal.

#### Contamination

There is a light amount of silt (particulates < 14 microns in size) present in the oil.


#### **Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

				<u></u>		
			Feb 2023	Feb2024		
SAMPLE INFOR	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PCA0113913	PCA0083697	
Sample Date		Client Info		23 Feb 2024	01 Feb 2023	
Machine Age	hrs	Client Info		14548	11740	
Oil Age	hrs	Client Info		1000	0	
Oil Changed		Client Info		Changed	Not Changd	
Sample Status				ATTENTION	NORMAL	
CONTAMINAT	ION	method	limit/base	current	history1	history2
Water		WC Method	>0.1	NEG	NEG	
WEAR METAL	S	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	1	5	
Chromium	ppm		>10	<1	0	
Nickel	ppm	ASTM D5185m	>10	<1	0	
Titanium	ppm	ASTM D5185m		<1	<1	
Silver	ppm	ASTM D5185m		0	0	
Aluminum	ppm	ASTM D5185m	>10	<1	1	
Lead	ppm	ASTM D5185m	>10	0	0	
Copper	ppm	ASTM D5185m	>75	<1	4	
Tin	ppm	ASTM D5185m	>10	<1	0	
Vanadium	ppm	ASTM D5185m		0	0	
Cadmium	ppm	ASTM D5185m		0	0	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	5	<1	1	
Barium	ppm	ASTM D5185m	5	0	0	
Molybdenum	ppm	ASTM D5185m	5	<1	2	
Manganese	ppm	ASTM D5185m		<1	0	
Magnesium	ppm	ASTM D5185m	25	2	10	
Calcium	ppm	ASTM D5185m	200	73	119	
Phosphorus	ppm	ASTM D5185m	300	351	388	
Zinc	ppm	ASTM D5185m	370	459	511	
Sulfur	ppm	ASTM D5185m	2500	930	1156	
CONTAMINAN	TS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	<1	2	
Sodium	ppm	ASTM D5185m		0	<1	
Potassium	ppm	ASTM D5185m	>20	<1	<1	
FLUID CLEANL	INESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	6584	4476	
Particles >6µm		ASTM D7647	>1300	2063	747	
Particles >14µm		ASTM D7647	>160	217	44	
Particles >21µm		ASTM D7647	>40	<b>57</b>	10	
Particles >38µm		ASTM D7647	>10	1	0	
Particles >71µm		ASTM D7647	>3	0	0	
Oil Cleanliness		ISO 4406 (c)	>19/17/14	<b>20/18/15</b>	19/17/13	
FLUID DEGRA	DATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.57	0.48	0.34	



## **OIL ANALYSIS REPORT**

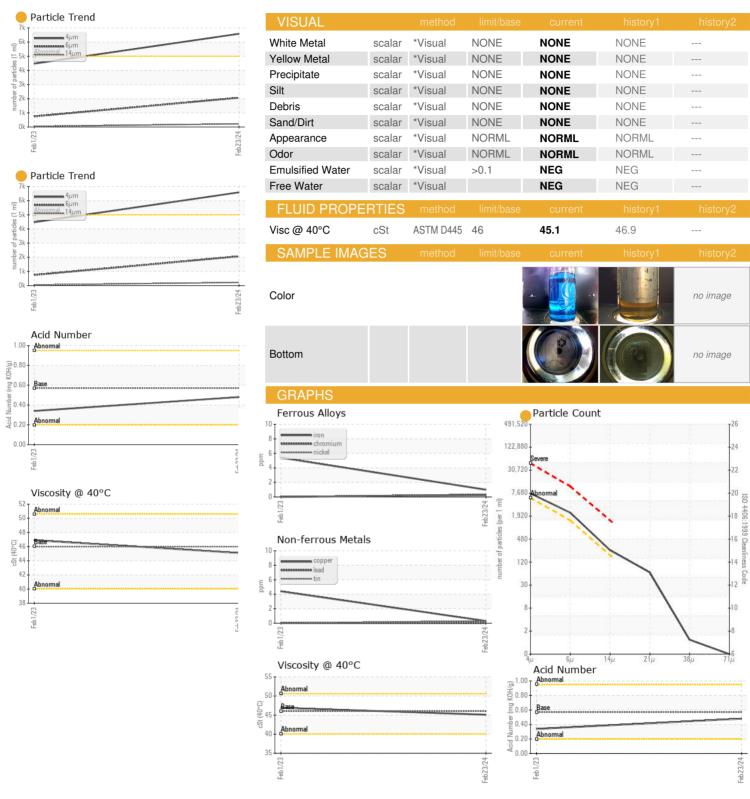



Certificate L2367

Laboratory Sample No.

: WearCheck USA - 501 Madison Ave., Cary, NC 27513

Lab Number : 06104299 Unique Number: 10902529 Test Package : MOB 2

: PCA0113913

Received **Tested** Diagnosed

: 29 Feb 2024 : 01 Mar 2024

: 01 Mar 2024 - Wes Davis

SCRAP METAL SERVICES (SMS Mill Services LLC) 250 WEST U.S. HWY 12

CHESTERTON, IN US 46304

Contact: DOMINIC WHITE

dwhite@scrapmetalservices.com T:

To discuss this sample report, contact Customer Service at 1-800-237-1369. \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: