


# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

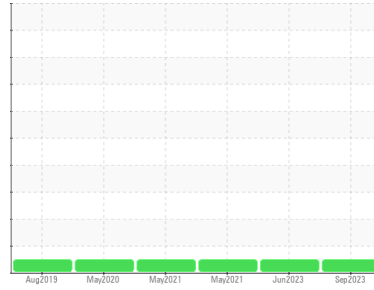

Machine Id  
**DT634**  
Component  
**Rear Differential**  
Fluid  
**CHEVRON RPM SYNTHETIC GEAR 75W90 (3 mls)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0089173</b>	PCA0074072	PCA0045121
Sample Date	Client Info		<b>25 Sep 2023</b>	13 Jun 2023	06 May 2021
Machine Age	mls	Client Info	<b>186604</b>	177537	0
Oil Age	mls	Client Info	<b>33045</b>	23973	0
Oil Changed	Client Info		<b>Not Chngd</b>	Not Chngd	Not Chngd
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>.2	<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >1200	<b>104</b>	86	198
Chromium	ppm	ASTM D5185m >8	<b>&lt;1</b>	<1	1
Nickel	ppm	ASTM D5185m >20	<b>4</b>	3	9
Titanium	ppm	ASTM D5185m >4	<b>&lt;1</b>	0	<1
Silver	ppm	ASTM D5185m	<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185m >30	<b>8</b>	8	14
Lead	ppm	ASTM D5185m >25	<b>0</b>	0	0
Copper	ppm	ASTM D5185m >50	<b>&lt;1</b>	0	<1
Tin	ppm	ASTM D5185m >5	<b>0</b>	0	0
Antimony	ppm	ASTM D5185m >5	<b>---</b>	---	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	<1	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>215</b>	248	190
Barium	ppm	ASTM D5185m	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	<b>15</b>	16	<1
Manganese	ppm	ASTM D5185m	<b>1</b>	1	2
Magnesium	ppm	ASTM D5185m	<b>137</b>	142	3
Calcium	ppm	ASTM D5185m	<b>230</b>	246	13
Phosphorus	ppm	ASTM D5185m	<b>1330</b>	1344	1323
Zinc	ppm	ASTM D5185m	<b>231</b>	235	0
Sulfur	ppm	ASTM D5185m	<b>19728</b>	24503	22309

## CONTAMINANTS


	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >230	<b>40</b>	34	93
Sodium	ppm	ASTM D5185m	<b>1</b>	<1	3
Potassium	ppm	ASTM D5185m >20	<b>1</b>	2	4

## VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	<b>NONE</b>	NONE	LIGHT
Yellow Metal	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual >.2	<b>NEG</b>	NEG	NEG
Free Water	scalar	*Visual	<b>NEG</b>	NEG	NEG



# OIL ANALYSIS REPORT

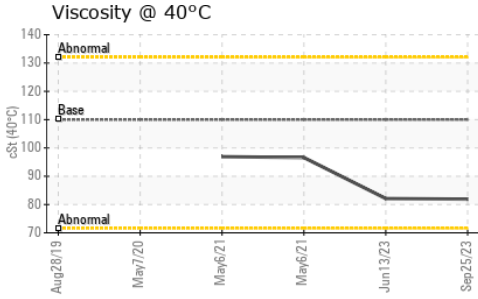




### FLUID PROPERTIES

method	limit/base	current	history1	history2
Visc @ 40°C	cSt ASTM D445 110	<b>81.9</b>	82.1	96.6

### SAMPLE IMAGES

method	limit/base	current	history1	history2
Color		<i>no image</i>	<i>no image</i>	<i>no image</i>
Bottom		<i>no image</i>	<i>no image</i>	<i>no image</i>

### GRAPHS

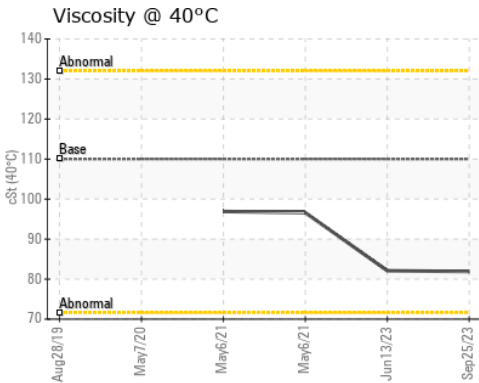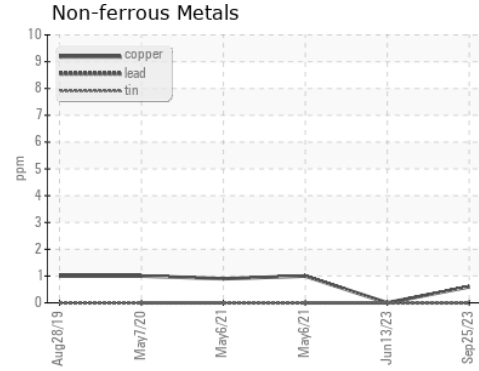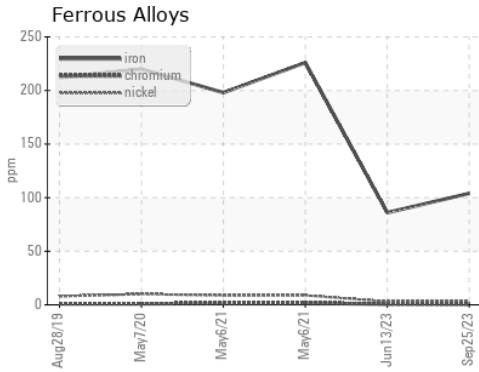

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0089173  
**Lab Number** : **06104644**  
**Unique Number** : 10902874  
**Test Package** : FLEET

**Received** : 29 Feb 2024  
**Tested** : 01 Mar 2024  
**Diagnosed** : 04 Mar 2024 - Sean Felton

**NW WHITE & CO - GREER DIVISION**  
 1060 ROGERS BRIDGE RD  
 DUNCAN, SC  
 US 29334  
 Contact: Matt Quinlan  
 mquinlan@nwwhite.com  
 T: (864)905-8506  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)