


# OIL ANALYSIS REPORT

Sample Rating Trend



**NORMAL**

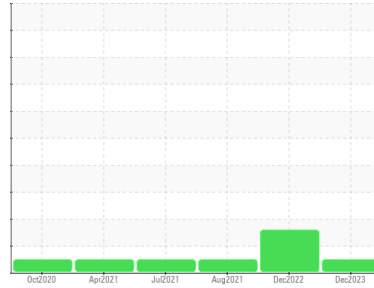

Machine Id  
**T299**

Component  
**Front Differential**

Fluid  
**CHEVRON DELO SYNTHETIC GEAR 75W90 (--- QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PCA0089186</b>	PCA0080504	PCA0045177
Sample Date	Client Info			<b>29 Dec 2023</b>	16 Dec 2022	27 Aug 2021
Machine Age	mls	Client Info		<b>266117</b>	197437	0
Oil Age	mls	Client Info		<b>68680</b>	105388	0
Oil Changed	Client Info			<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	ABNORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>.2	<b>NEG</b>	NEG	NEG


WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>500	<b>50</b>	192	109
Chromium	ppm	ASTM D5185m	>10	<b>&lt;1</b>	2	<1
Nickel	ppm	ASTM D5185m	>10	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185m		<b>0</b>	0	<1
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>25	<b>2</b>	2	2
Lead	ppm	ASTM D5185m	>25	<b>&lt;1</b>	0	3
Copper	ppm	ASTM D5185m	>100	<b>&lt;1</b>	2	1
Tin	ppm	ASTM D5185m	>10	<b>&lt;1</b>	<1	0
Antimony	ppm	ASTM D5185m	>5	<b>---</b>	---	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>&lt;1</b>	0	<1

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>207</b>	240	255
Barium	ppm	ASTM D5185m		<b>0</b>	0	1
Molybdenum	ppm	ASTM D5185m		<b>10</b>	<1	0
Manganese	ppm	ASTM D5185m		<b>3</b>	14	10
Magnesium	ppm	ASTM D5185m		<b>122</b>	<1	0
Calcium	ppm	ASTM D5185m		<b>167</b>	7	6
Phosphorus	ppm	ASTM D5185m		<b>1362</b>	1418	1340
Zinc	ppm	ASTM D5185m		<b>188</b>	14	12
Sulfur	ppm	ASTM D5185m		<b>20563</b>	25056	22532

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>75	<b>22</b>	▲ 93	39
Sodium	ppm	ASTM D5185m		<b>2</b>	7	8
Potassium	ppm	ASTM D5185m	>20	<b>1</b>	<1	7

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	<b>NONE</b>	MODER	LIGHT
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>LIGHT</b>	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>.2	<b>NEG</b>	NEG	NEG
Free Water	scalar	*Visual		<b>NEG</b>	NEG	NEG

# OIL ANALYSIS REPORT



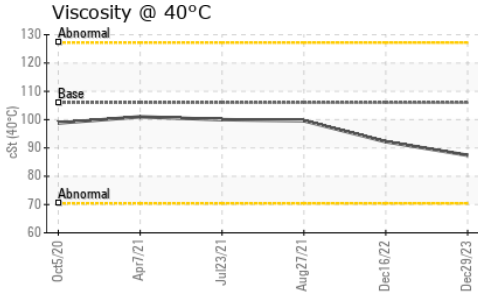


FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D445	106	<b>87.4</b>	92.2	99.6

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color		no image	no image	no image
Bottom		no image	no image	no image

## GRAPHS

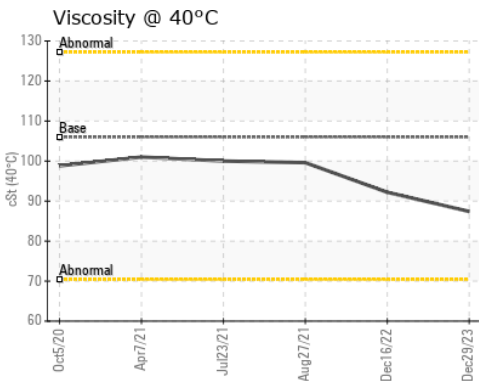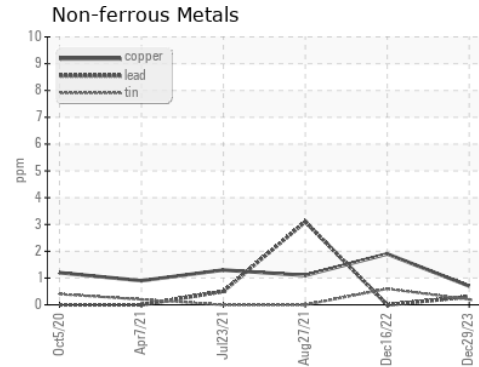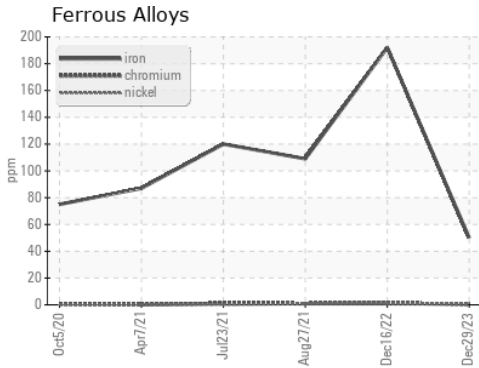

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0089186 **Received** : 29 Feb 2024  
**Lab Number** : \*06104648 **Tested** : 01 Mar 2024  
**Unique Number** : 10902878 **Diagnosed** : 04 Mar 2024 - Sean Felton  
**Test Package** : FLEET

**NW WHITE & CO - GREER DIVISION**  
 1060 ROGERS BRIDGE RD  
 DUNCAN, SC  
 US 29334  
 Contact: Matt Quinlan  
 mquinlan@nwwhite.com  
 T: (864)905-8506  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)