


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL

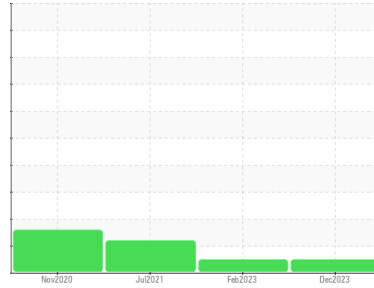

Machine Id

T315

Component

Diesel Engine

Fluid

PETRO CANADA DURON SHP 10W30 (--- QTS)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PCA0089156	PCA0089261	PCA0050564
Sample Date	Client Info		27 Dec 2023	03 Feb 2023	16 Jul 2021
Machine Age	mls	Client Info	163998	163998	55160
Oil Age	mls	Client Info	231757	64112	0
Oil Changed	Client Info		Changed	Changed	Changed
Sample Status			NORMAL	NORMAL	ATTENTION

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	<1.0	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	77	73	49
Chromium	ppm	ASTM D5185m >20	<1	<1	<1
Nickel	ppm	ASTM D5185m >4	<1	<1	0
Titanium	ppm	ASTM D5185m	0	0	<1
Silver	ppm	ASTM D5185m >3	<1	0	<1
Aluminum	ppm	ASTM D5185m >20	6	10	16
Lead	ppm	ASTM D5185m >40	2	<1	<1
Copper	ppm	ASTM D5185m >330	6	5	6
Tin	ppm	ASTM D5185m >15	<1	<1	1
Antimony	ppm	ASTM D5185m	---	---	0
Vanadium	ppm	ASTM D5185m	0	<1	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 2	8	4	22
Barium	ppm	ASTM D5185m 0	0	0	0
Molybdenum	ppm	ASTM D5185m 50	64	64	39
Manganese	ppm	ASTM D5185m 0	1	<1	<1
Magnesium	ppm	ASTM D5185m 950	957	986	808
Calcium	ppm	ASTM D5185m 1050	1125	1163	1272
Phosphorus	ppm	ASTM D5185m 995	1108	1071	828
Zinc	ppm	ASTM D5185m 1180	1314	1306	1038
Sulfur	ppm	ASTM D5185m 2600	2160	2665	2456

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	12	10	7
Sodium	ppm	ASTM D5185m	2	2	2
Potassium	ppm	ASTM D5185m >20	8	21	59




INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	1.5	1.4	0.9
Nitration	Abs/cm	*ASTM D7624 >20	14.0	13.4	11.8
Sulfation	Abs/.1mm	*ASTM D7415 >30	35.7	26.9	26.7

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	44.6	24.2	21.9
Base Number (BN)	mg KOH/g	ASTM D2896	3.7	6.3	5.6





OIL ANALYSIS REPORT

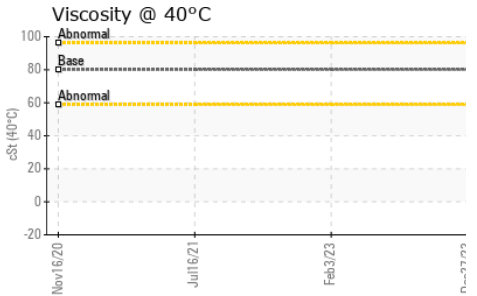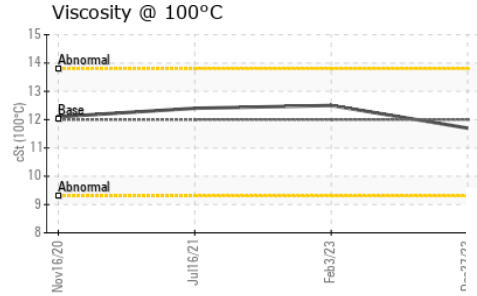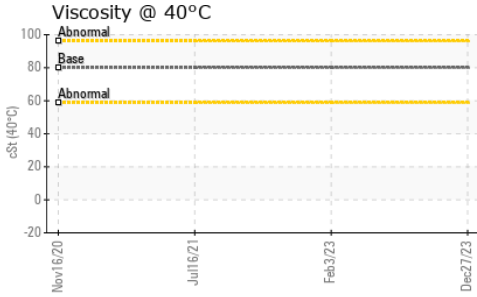

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	12.00	11.7	12.5	12.4

GRAPHS

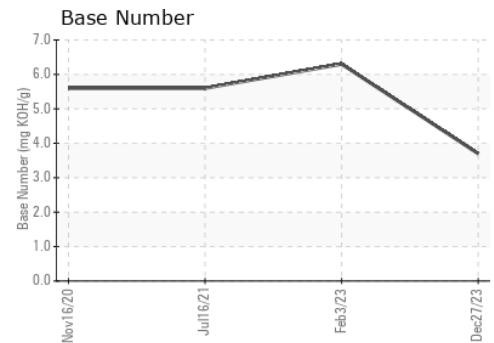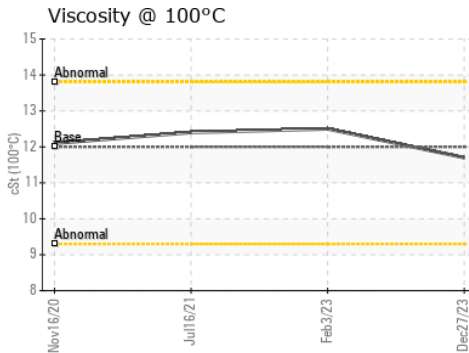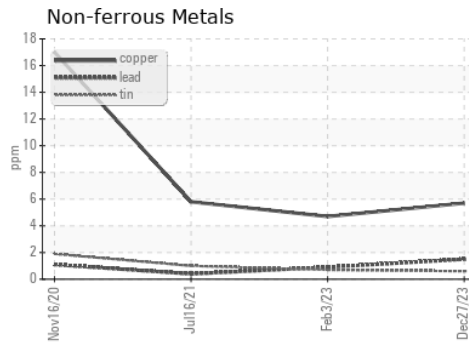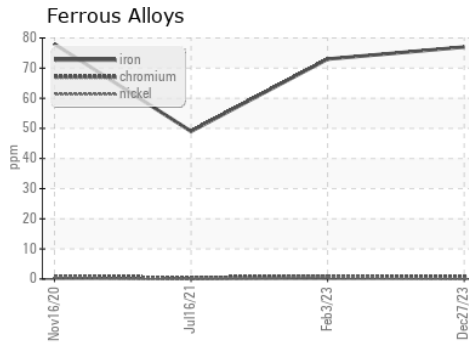

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0089156 **Received** : 29 Feb 2024
Lab Number : **06104649** **Tested** : 05 Mar 2024
Unique Number : 10902879 **Diagnosed** : 05 Mar 2024 - Sean Felton
Test Package : FLEET (Additional Tests: KV40)

NW WHITE & CO - GREER DIVISION
 1060 ROGERS BRIDGE RD
 DUNCAN, SC
 US 29334
 Contact: Matt Quinlan
 mquinlan@nwwhite.com
 T: (864)905-8506
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)