


# OIL ANALYSIS REPORT

### Sample Rating Trend



**NORMAL**

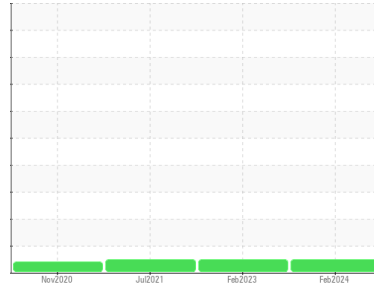

Machine Id

**T315**

Component

**Front Differential**

Fluid

**CHEVRON DELO SYNTHETIC GEAR 75W90 (--- QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0089147</b>	PCA0089263	PCA0050610
Sample Date	Client Info		<b>27 Feb 2024</b>	03 Feb 2023	19 Jul 2021
Machine Age	mls	Client Info	<b>163998</b>	163998	0
Oil Age	mls	Client Info	<b>231757</b>	64112	0
Oil Changed	Client Info		<b>Changed</b>	Changed	Not Chngd
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>.2	<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >500	<b>124</b>	90	81
Chromium	ppm	ASTM D5185m >10	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m >10	<b>&lt;1</b>	0	<1
Titanium	ppm	ASTM D5185m	<b>0</b>	0	<1
Silver	ppm	ASTM D5185m	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185m >25	<b>2</b>	<1	0
Lead	ppm	ASTM D5185m >25	<b>&lt;1</b>	0	0
Copper	ppm	ASTM D5185m >100	<b>1</b>	<1	2
Tin	ppm	ASTM D5185m >10	<b>0</b>	0	<1
Antimony	ppm	ASTM D5185m >5	<b>---</b>	---	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	<1

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>216</b>	249	321
Barium	ppm	ASTM D5185m	<b>0</b>	0	2
Molybdenum	ppm	ASTM D5185m	<b>12</b>	10	<1
Manganese	ppm	ASTM D5185m	<b>5</b>	4	12
Magnesium	ppm	ASTM D5185m	<b>142</b>	96	<1
Calcium	ppm	ASTM D5185m	<b>201</b>	150	8
Phosphorus	ppm	ASTM D5185m	<b>1411</b>	1328	1437
Zinc	ppm	ASTM D5185m	<b>221</b>	151	6
Sulfur	ppm	ASTM D5185m	<b>20424</b>	24602	21855


## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >75	<b>10</b>	10	27
Sodium	ppm	ASTM D5185m	<b>2</b>	2	12
Potassium	ppm	ASTM D5185m >20	<b>&lt;1</b>	0	2

## VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual NONE	<b>LIGHT</b>	NONE	NONE
Sand/Dirt	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual >.2	<b>NEG</b>	NEG	NEG
Free Water	scalar	*Visual	<b>NEG</b>	NEG	NEG

# OIL ANALYSIS REPORT



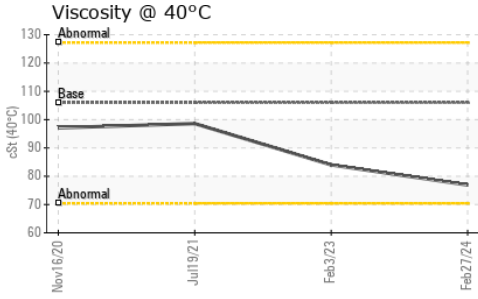


FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	106	<b>76.9</b>	84.0	98.6

SAMPLE IMAGES		method	limit/base	current	history1	history2
---------------	--	--------	------------	---------	----------	----------

Color		no image	no image	no image
Bottom		no image	no image	no image

## GRAPHS

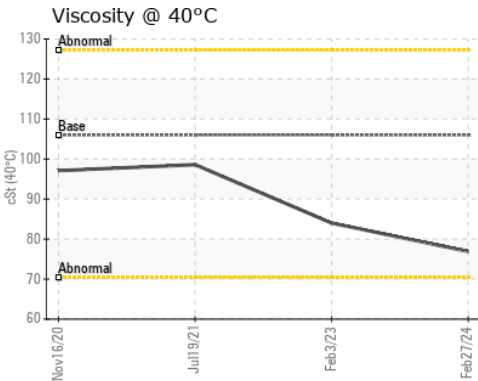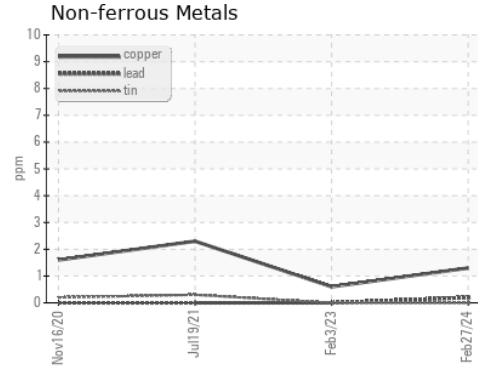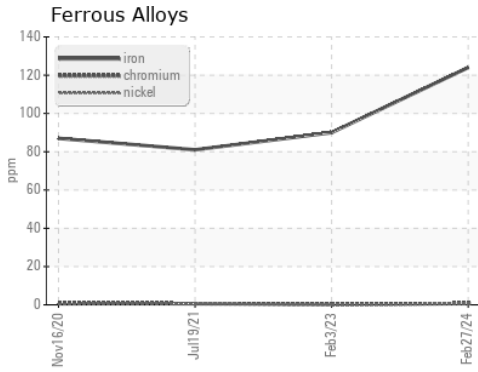

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0089147 **Received** : 29 Feb 2024  
**Lab Number** : 06104651 **Tested** : 01 Mar 2024  
**Unique Number** : 10902881 **Diagnosed** : 04 Mar 2024 - Sean Felton  
**Test Package** : FLEET

**NW WHITE & CO - GREER DIVISION**  
 1060 ROGERS BRIDGE RD  
 DUNCAN, SC  
 US 29334  
 Contact: Matt Quinlan  
 mquinlan@nwwhite.com  
 T: (864)905-8506  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)