

Machine Id
DT710
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 10W30 (--- QTS)

DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. Test for glycol is negative.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION method limit/base current history1 history2

Sample Number	Client Info		PCA0074027	PCA0089106	PCA0050601
Sample Date	Client Info		23 Aug 2023	07 Dec 2022	29 Jul 2021
Machine Age	mls	Client Info	129828	103840	0
Oil Age	mls	Client Info	25988	51377	0
Oil Changed		Client Info	Changed	Changed	Changed
Sample Status			NORMAL	NORMAL	ABNORMAL

CONTAMINATION method limit/base current history1 history2

Fuel	WC Method	>5	<1.0	<1.0	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	0.0

WEAR METALS method limit/base current history1 history2

Iron	ppm	ASTM D5185m	>110	36	59	37
Chromium	ppm	ASTM D5185m	>4	1	2	1
Nickel	ppm	ASTM D5185m	>2	<1	0	0
Titanium	ppm	ASTM D5185m		<1	<1	<1
Silver	ppm	ASTM D5185m	>2	0	0	<1
Aluminum	ppm	ASTM D5185m	>25	15	27	19
Lead	ppm	ASTM D5185m	>45	0	0	<1
Copper	ppm	ASTM D5185m	>85	2	5	6
Tin	ppm	ASTM D5185m	>4	<1	<1	<1
Antimony	ppm	ASTM D5185m		---	---	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0

ADDITIVES method limit/base current history1 history2

Boron	ppm	ASTM D5185m	2	4	2	24
Barium	ppm	ASTM D5185m	0	0	2	0
Molybdenum	ppm	ASTM D5185m	50	69	64	47
Manganese	ppm	ASTM D5185m	0	<1	<1	<1
Magnesium	ppm	ASTM D5185m	950	998	953	828
Calcium	ppm	ASTM D5185m	1050	1112	1208	1287
Phosphorus	ppm	ASTM D5185m	995	1036	1070	941
Zinc	ppm	ASTM D5185m	1180	1312	1292	1092
Sulfur	ppm	ASTM D5185m	2600	2859	2542	2561

CONTAMINANTS method limit/base current history1 history2

Silicon	ppm	ASTM D5185m	>30	6	5	5
Sodium	ppm	ASTM D5185m		3	2	<1
Potassium	ppm	ASTM D5185m	>20	28	66	▲ 61



INFRA-RED method limit/base current history1 history2

Soot %	%	*ASTM D7844	>3	0.7	1	0.5
Nitration	Abs/cm	*ASTM D7624	>20	11.7	13.8	10.3
Sulfation	Abs/.1mm	*ASTM D7415	>30	23.5	27.5	23.6

FLUID DEGRADATION method limit/base current history1 history2

Oxidation	Abs/.1mm	*ASTM D7414	>25	20.2	25.8	19
Base Number (BN)	mg KOH/g	ASTM D2896		6.0	4.4	5.5





OIL ANALYSIS REPORT

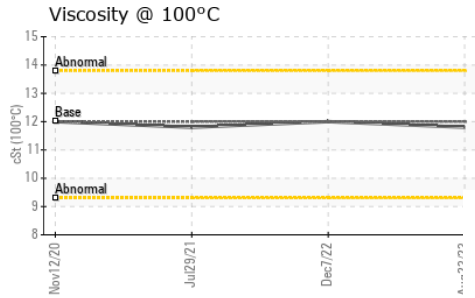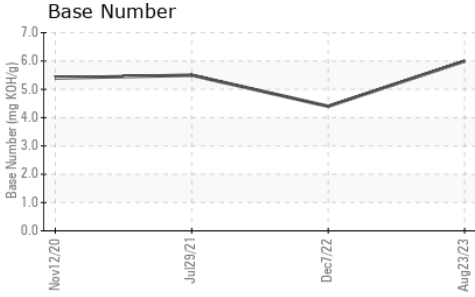

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	11.8	12.0

GRAPHS

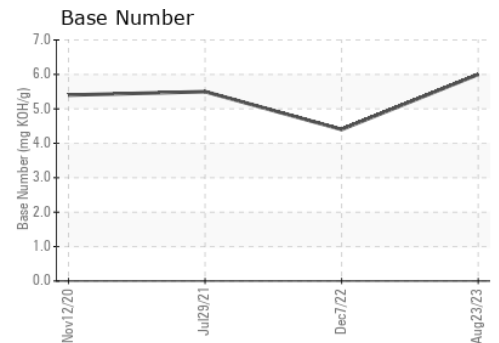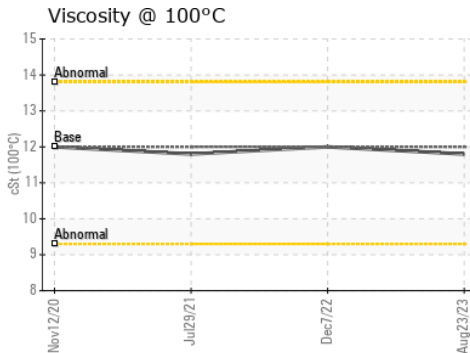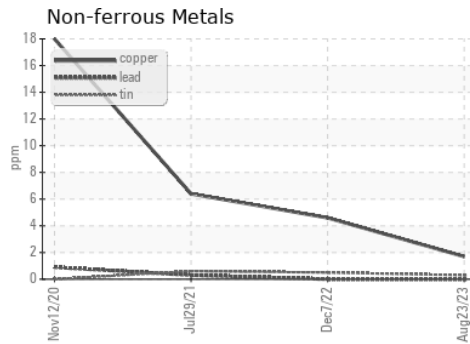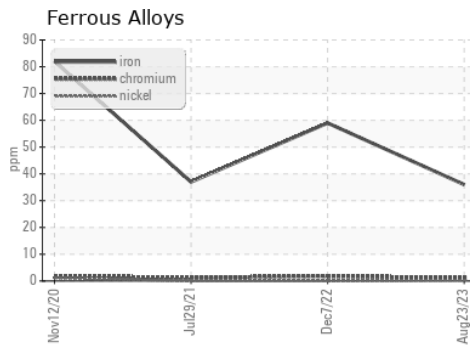

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0074027
Lab Number : **06104787**
Unique Number : 10903017
Test Package : FLEET
Received : 29 Feb 2024
Tested : 01 Mar 2024
Diagnosed : 04 Mar 2024 - Sean Felton

NW WHITE & CO - GREER DIVISION
 1060 ROGERS BRIDGE RD
 DUNCAN, SC
 US 29334
 Contact: Matt Quinlan
 mquinlan@nwwhite.com
 T: (864)905-8506
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)