




OIL ANALYSIS REPORT

Sample Rating Trend

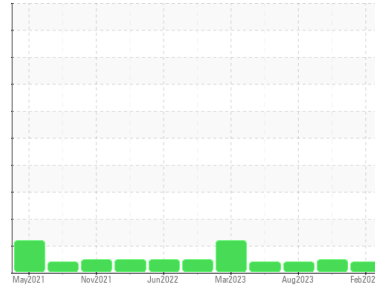

VISCOSITY



Machine Id
921011

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (40 QTS)

DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

Fuel content negligible. There is no indication of any contamination in the oil.

Fluid Condition

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			GFL0110279	GFL0102815	GFL0090502
Sample Date	Client Info			23 Feb 2024	02 Dec 2023	25 Aug 2023
Machine Age	hrs	Client Info		13315	13303	13249
Oil Age	hrs	Client Info		580	13249	590
Oil Changed	Client Info			Changed	Not Changd	Changed
Sample Status				ATTENTION	NORMAL	ATTENTION

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.2	NEG	NEG	NEG
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	8	8	58
Chromium	ppm	ASTM D5185m	>20	2	<1	3
Nickel	ppm	ASTM D5185m	>4	0	<1	<1
Titanium	ppm	ASTM D5185m		0	0	<1
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>20	2	2	4
Lead	ppm	ASTM D5185m	>40	<1	<1	5
Copper	ppm	ASTM D5185m	>330	2	2	6
Tin	ppm	ASTM D5185m	>15	<1	0	2
Vanadium	ppm	ASTM D5185m		0	<1	0
Cadmium	ppm	ASTM D5185m		0	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	17	12	14
Barium	ppm	ASTM D5185m	0	0	0	2
Molybdenum	ppm	ASTM D5185m	60	52	46	62
Manganese	ppm	ASTM D5185m	0	<1	0	1
Magnesium	ppm	ASTM D5185m	1010	805	807	874
Calcium	ppm	ASTM D5185m	1070	912	925	1107
Phosphorus	ppm	ASTM D5185m	1150	982	899	992
Zinc	ppm	ASTM D5185m	1270	1108	1053	1155
Sulfur	ppm	ASTM D5185m	2060	2833	2353	2857




CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	4	5	5
Sodium	ppm	ASTM D5185m		3	2	4
Potassium	ppm	ASTM D5185m	>20	2	3	6
Fuel	%	ASTM D3524	>5	1.0	<1.0	<1.0

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.2	0.2	1.9
Nitration	Abs/cm	*ASTM D7624	>20	5.0	4.9	9.8
Sulfation	Abs/.1mm	*ASTM D7415	>30	17.5	17.5	22.8

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	12.9	12.8	16.8
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	8.2	8.4	8.0







OIL ANALYSIS REPORT

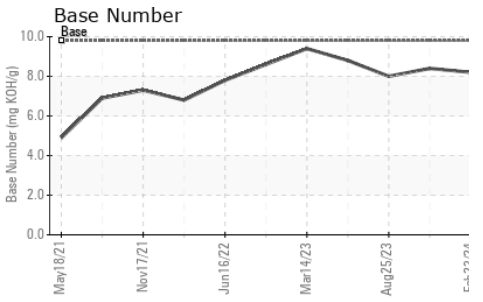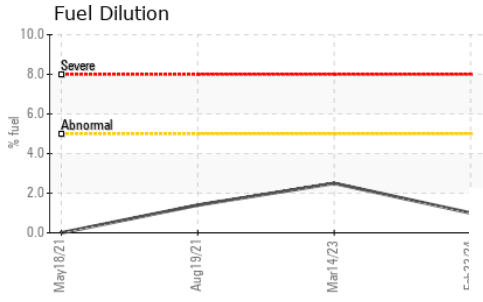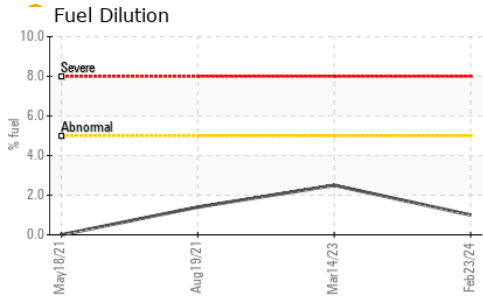

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	● 12.3	12.6

GRAPHS

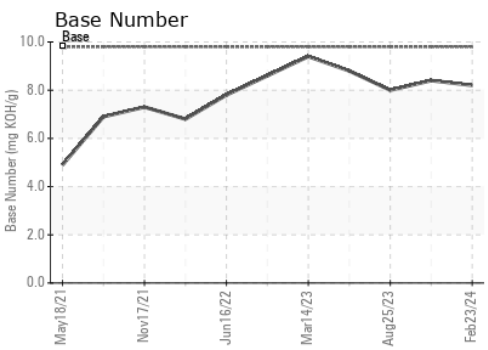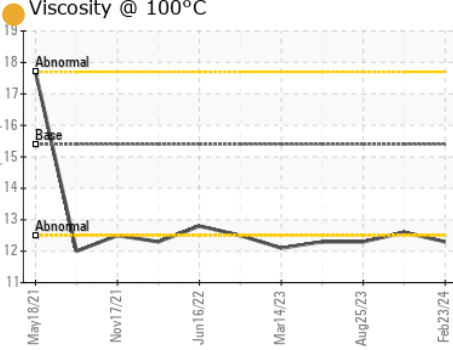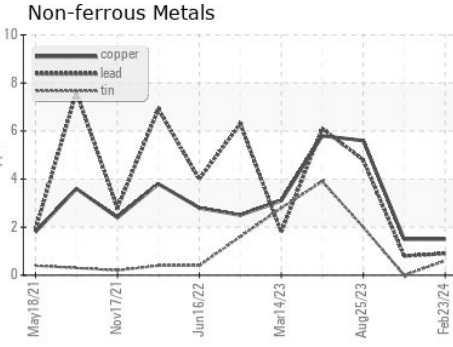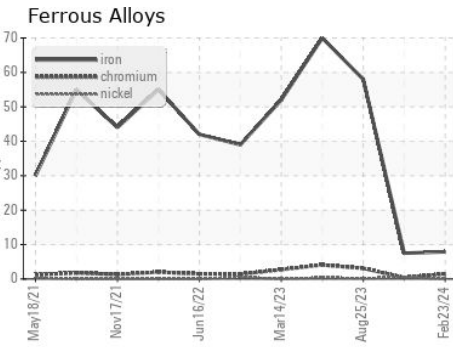

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0110279 **Received** : 29 Feb 2024
Lab Number : 06104990 **Tested** : 04 Mar 2024
Unique Number : 10903220 **Diagnosed** : 04 Mar 2024 - Sean Felton
Test Package : FLEET (Additional Tests: FuelDilution, PercentFuel)

GFL Environmental - 622 - Traverse City Hauling
 160 Hughes Dr
 Traverse City, MI
 US 49686
Contact: GARY BREWER

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: