


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL

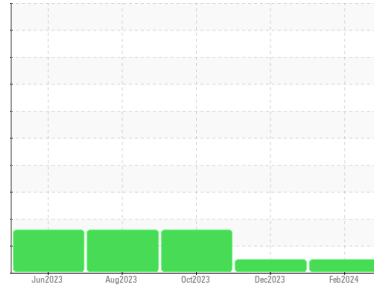

Machine Id
FORD 600 (S/N 1FM5K8D88HGC62653)

Component
Gasoline Engine

Fluid
PETRO CANADA SUPREME 5W20 MOTOR OIL (6 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	PCA0117696	PCA0112916	PCA0105348
Sample Date	Client Info	21 Feb 2024	29 Dec 2023	16 Oct 2023
Machine Age	mls Client Info	0	133605	129937
Oil Age	mls Client Info	0	3668	5893
Oil Changed	Client Info	N/A	Changed	N/A
Sample Status		NORMAL	NORMAL	ABNORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >4.0	<1.0	<1.0	<1.0
Water	WC Method >0.2	NEG	NEG	NEG
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >150	2	1	6
Chromium	ppm ASTM D5185m >20	<1	<1	<1
Nickel	ppm ASTM D5185m >5	0	0	<1
Titanium	ppm ASTM D5185m	0	<1	<1
Silver	ppm ASTM D5185m >2	0	0	0
Aluminum	ppm ASTM D5185m >40	2	2	3
Lead	ppm ASTM D5185m >50	0	1	<1
Copper	ppm ASTM D5185m >155	2	3	4
Tin	ppm ASTM D5185m >10	<1	<1	0
Vanadium	ppm ASTM D5185m	0	0	0
Cadmium	ppm ASTM D5185m	0	0	<1

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 183	95	82	46
Barium	ppm ASTM D5185m 0	0	0	9
Molybdenum	ppm ASTM D5185m 36	63	67	88
Manganese	ppm ASTM D5185m 0	<1	<1	<1
Magnesium	ppm ASTM D5185m 417	573	511	675
Calcium	ppm ASTM D5185m 1318	1102	1129	1526
Phosphorus	ppm ASTM D5185m 773	756	705	931
Zinc	ppm ASTM D5185m 845	848	786	1062
Sulfur	ppm ASTM D5185m 2690	2765	2638	3911

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >30	21	18	▲ 38
Sodium	ppm ASTM D5185m >400	4	4	9
Potassium	ppm ASTM D5185m >20	<1	<1	2



INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844	0	0	0.1
Nitration	Abs/cm *ASTM D7624 >20	8.6	8.7	10.1
Sulfation	Abs/.1mm *ASTM D7415 >30	18.4	19.9	22.8

FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	13.2	13.7	17.4
Base Number (BN)	mg KOH/g ASTM D2896 6.5	4.9	4.0	4.5









OIL ANALYSIS REPORT

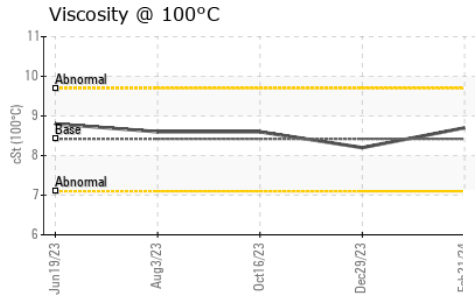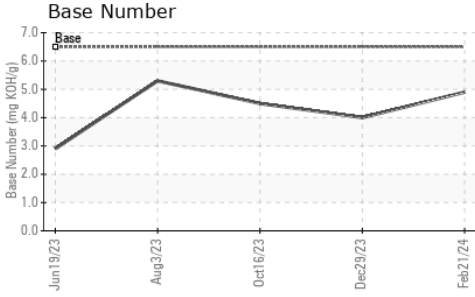

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	8.42	8.7	8.2	8.6

GRAPHS

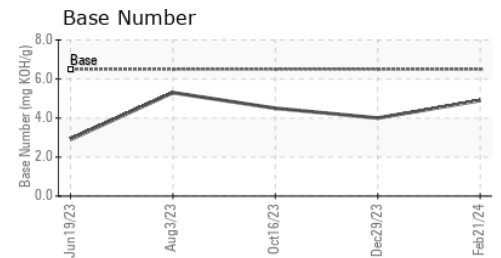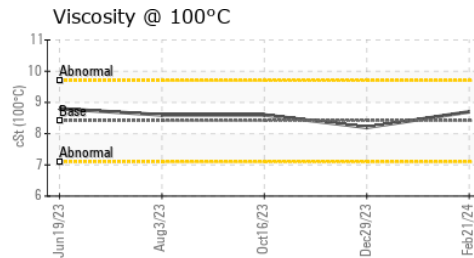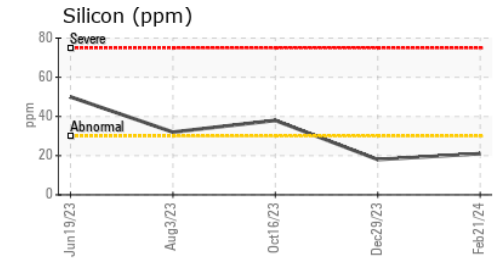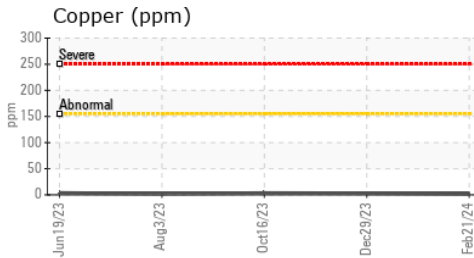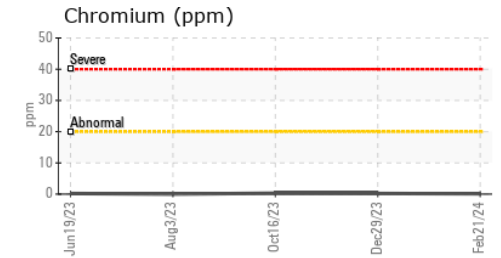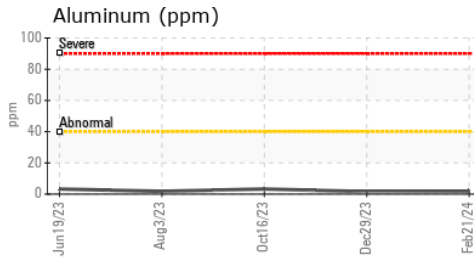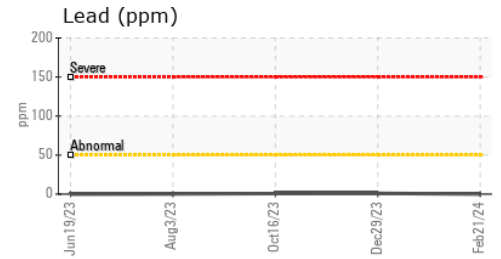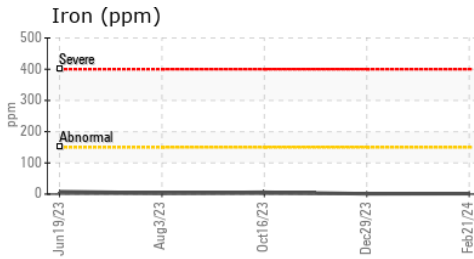

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0117696 **Received** : 29 Feb 2024
Lab Number : 06105031 **Tested** : 01 Mar 2024
Unique Number : 10903261 **Diagnosed** : 01 Mar 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: TBN)

VILLAGE OF NORTH RIVERSIDE
 2345 S DESPLAINES
 NORTH RIVERSIDE, IL
 US 60546
 Contact: Service Manager
 vznrdpw@gmail.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: